


Service Manual

Plasma Television

Model No. **TX-P50S20B**

GPF13DE Chassis

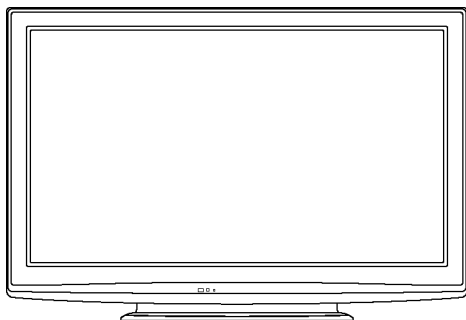

WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

IMPORTANT SAFETY NOTICE


There are special components used in this equipment which are important for safety. These parts are marked by  in the Schematic Diagrams, Circuit Board Diagrams, Exploded Views and Replacement Parts List. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire or other hazards. Do not modify the original design without permission of manufacturer.

TABLE OF CONTENTS

	PAGE		PAGE
1 Safety Precautions	3	12.2. Wiring (1)	39
1.1. General Guidelines	3	12.3. Wiring (2)	40
1.2. Touch-Current Check	3	12.4. Wiring (3)	41
2 Warning	4	13 Schematic Diagram	43
2.1. Prevention of Electrostatic Discharge (ESD) to Electrostatically Sensitive (ES) Devices	4	13.1. Schematic Diagram Note	43
2.2. About lead free solder (PbF)	5	13.2. P-Board (1/3) Schematic Diagram	44
3 Service Navigation	6	13.3. P-Board (2/3) Schematic Diagram	45
3.1. PCB Layout	6	13.4. P-Board (3/3) Schematic Diagram	46
3.2. Applicable signals	7	13.5. A-Board (1/22) Schematic Diagram	47
4 Specifications	8	13.6. A-Board (2/22) Schematic Diagram	48
5 Technical Descriptions	9	13.7. A-Board (3/22) Schematic Diagram	49
5.1. Specification of KEY for CI Plus, DTCP-IP and One-to-One	9	13.8. A-Board (4/22) Schematic Diagram	50
6 Service Mode	10	13.9. A-Board (5/22) Schematic Diagram	51
6.1. How to enter into Service Mode	10	13.10. A-Board (6/22) Schematic Diagram	52
6.2. Option - Mirror	12	13.11. A-Board (7/22) Schematic Diagram	53
6.3. Service tool mode	12	13.12. A-Board (8/22) Schematic Diagram	54
6.4. Hotel mode	13	13.13. A-Board (9/22) Schematic Diagram	55
6.5. Data Copy by SD Card	14	13.14. A-Board (10/22) Schematic Diagram	56
7 Troubleshooting Guide	17	13.15. A-Board (11/22) Schematic Diagram	57
7.1. Check of the IIC bus lines	17	13.16. A-Board (12/22) Schematic Diagram	58
7.2. Power LED Blinking timing chart	18	13.17. A-Board (13/22) Schematic Diagram	59
7.3. No Power	19	13.18. A-Board (14/22) Schematic Diagram	60
7.4. No Picture	20	13.19. A-Board (15/22) Schematic Diagram	61
7.5. Local screen failure	21	13.20. A-Board (16/22) Schematic Diagram	62
8 Service Fixture & Tools	22	13.21. A-Board (17/22) Schematic Diagram	63
8.1. SC jig	22	13.22. A-Board (18/22) and K-Board Schematic Diagram	64
9 Disassembly and Assembly Instructions	23	13.23. A-Board (19/22) Schematic Diagram	65
9.1. Remove the Rear cover	23	13.24. A-Board (20/22) Schematic Diagram	66
9.2. Remove the AC inlet	23	13.25. A-Board (21/22) Schematic Diagram	67
9.3. Remove the P-Board	23	13.26. A-Board (22/22) Schematic Diagram	68
9.4. Remove the Side terminal cover and the Side shield metal	23	13.27. XW-Board Schematic Diagram	69
9.5. Remove the Tuner unit	23	13.28. C1-Board Schematic Diagram	70
9.6. Remove the A-Board	24	13.29. C2-Board (1/2) Schematic Diagram	71
9.7. Remove the XW-Board	24	13.30. C2-Board (2/2) Schematic Diagram	72
9.8. Remove the Speakers	25	13.31. C3-Board (1/2) Schematic Diagram	73
9.9. Remove the SU-Board	25	13.32. C3-Board (2/2) Schematic Diagram	74
9.10. Remove the SD-Board	25	13.33. SC-Board (1/4) Schematic Diagram	75
9.11. Remove the SC-Board	25	13.34. SC-Board (2/4) Schematic Diagram	76
9.12. Remove the SS2-Board	26	13.35. SC-Board (3/4) Schematic Diagram	77
9.13. Remove the SS-Board	26	13.36. SC-Board (4/4) Schematic Diagram	78
9.14. Remove the Hanger metals and the Stand brackets	26	13.37. SS-Board (1/2) Schematic Diagram	79
9.15. Remove the C1-Board	27	13.38. SS-Board (2/2) and SS2-Board Schematic Diagram	80
9.16. Remove the C2-Board	27	14 Printed Circuit Board	81
9.17. Remove the C3-Board	27	14.1. P-Board	81
9.18. Remove the Plasma panel section from the Cabinet assy (glass)	27	14.2. K and SS2-Board	84
9.19. Remove the Glass holders	28	14.3. A-Board	85
9.20. Remove the K-Board	28	14.4. XW-Board	87
9.21. Replace the plasma panel	28	14.5. C1-Board	88
10 Measurements and Adjustments	29	14.6. C2-Board	89
10.1. Adjustment	29	14.7. C3-Board	90
11 Block Diagram	33	14.8. SC-Board	91
11.1. Main Block Diagram	33	14.9. SS-Board	93
11.2. Block (1/5) Diagram	34	15 Exploded View and Replacement Parts List	95
11.3. Block (2/5) Diagram	35	15.1. Exploded View and Mechanical Replacement Parts List	95
11.4. Block (3/5) Diagram	36	15.2. Electrical Replacement Parts List	102
11.5. Block (4/5) Diagram	37		
11.6. Block (5/5) Diagram	38		
12 Wiring Connection Diagram	39		
12.1. Caution statement.	39		

1 Safety Precautions

1.1. General Guidelines

1. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
2. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
3. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.
4. When servicing, observe the original lead dress. If a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
5. After servicing, see to it that all the protective devices such as insulation barriers, insulation papers shields are properly installed.
6. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

1.2. Touch-Current Check

1. Plug the AC cord directly into the AC outlet. Do not use an isolation transformer for this check.
2. Connect a measuring network for touch currents between each exposed metallic part on the set and a good earth ground such as a water pipe, as shown in Figure 1.
3. Use Leakage Current Tester (Simpson 228 or equivalent) to measure the potential across the measuring network.
4. Check each exposed metallic part, and measure the voltage at each point.
5. Reserve the AC plug in the AC outlet and repeat each of the above measure.
6. The potential at any point (TOUCH CURRENT) expressed as voltage U_1 and U_2 , does not exceed the following values:

For a. c.: $U_1 = 35 \text{ V}$ (peak) and $U_2 = 0.35 \text{ V}$ (peak);

For d. c.: $U_1 = 1.0 \text{ V}$,


Note:

The limit value of $U_2 = 0.35 \text{ V}$ (peak) for a. c. and $U_1 = 1.0 \text{ V}$ for d. c. correspond to the values 0.7 mA (peak) a. c. and 2.0 mA d. c.

The limit value $U_1 = 35 \text{ V}$ (peak) for a. c. correspond to the value 70 mA (peak) a. c. for frequencies greater than 100 kHz .

7. In case a measurement is out of the limits specified, there is a possibility of a shock hazard, and the equipment should be repaired and rechecked before it is returned to the customer.

Measuring network for TOUCH CURRENTS

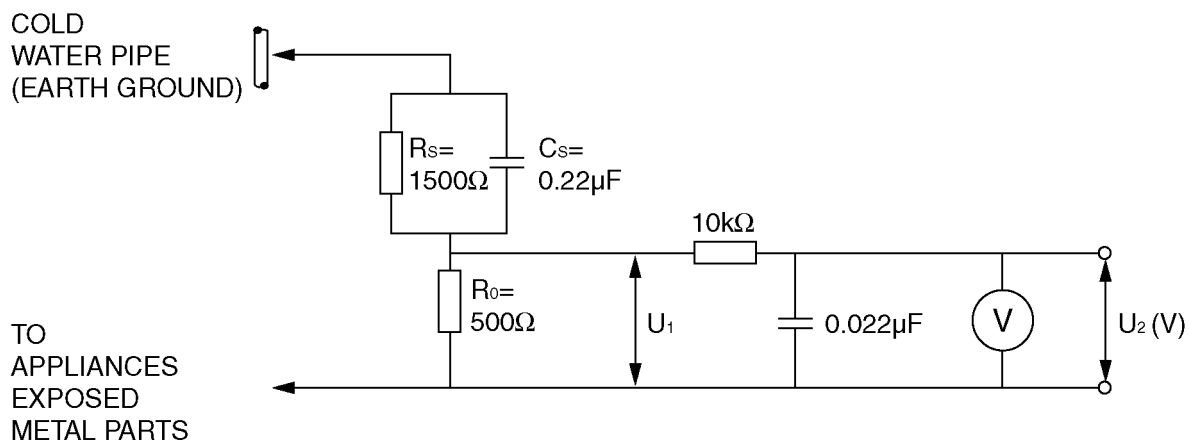

Resistance values in ohms (Ω)

V: Voltmeter or oscilloscope
(r.m.s. or peak reading)

Input resistance: $\geq 1 \text{ M}\Omega$

Input capacitance: $\leq 200 \text{ pF}$

Frequency range: 15 Hz to 1 MHz and d.c. respectively

NOTE - Appropriate measures should be taken to obtain the correct value in case of non-sinusoidal waveforms.

Figure 1

2 Warning

2.1. Prevention of Electrostatic Discharge (ESD) to Electrostatically Sensitive (ES) Devices

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor [chip] components. The following techniques should be used to help reduce the incidence of component damage caused by electrostatic discharge (ESD).

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device. Some solder removal devices not classified as [anti-static (ESD protected)] can generate electrical charge sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

Caution

Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise ham less motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device).

2.2. About lead free solder (PbF)

Note: Lead is listed as (Pb) in the periodic table of elements.

In the information below, Pb will refer to Lead solder, and PbF will refer to Lead Free Solder.

The Lead Free Solder used in our manufacturing process and discussed below is (Sn+Ag+Cu).


That is Tin (Sn), Silver (Ag) and Copper (Cu) although other types are available.

This model uses Pb Free solder in it's manufacture due to environmental conservation issues. For service and repair work, we'd suggest the use of Pb free solder as well, although Pb solder may be used.

PCBs manufactured using lead free solder will have the PbF within a leaf Symbol **PbF** stamped on the back of PCB.




Caution

- Pb free solder has a higher melting point than standard solder. Typically the melting point is 50 ~ 70 °F (30~40 °C) higher. Please use a high temperature soldering iron and set it to 700 ± 20 °F (370 ± 10 °C).
- Pb free solder will tend to splash when heated too high (about 1100 °F or 600 °C).
If you must use Pb solder, please completely remove all of the Pb free solder on the pins or solder area before applying Pb solder. If this is not practical, be sure to heat the Pb free solder until it melts, before applying Pb solder.
- After applying PbF solder to double layered boards, please check the component side for excess solder which may flow onto the opposite side. (see figure below)

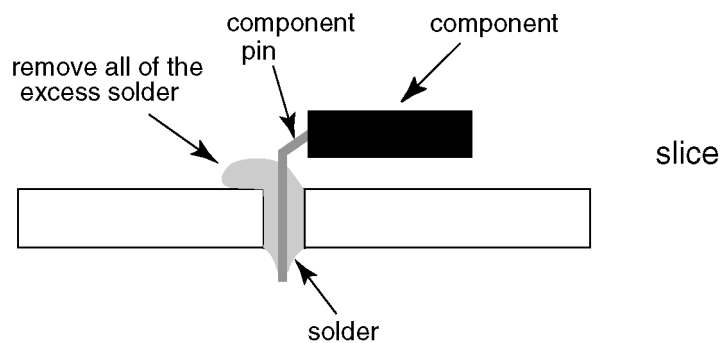



Suggested Pb free solder

There are several kinds of Pb free solder available for purchase. This product uses Sn+Ag+Cu (tin, silver, copper) solder. However, Sn+Cu (tin, copper), Sn+Zn+Bi (tin, zinc, bismuth) solder can also be used.

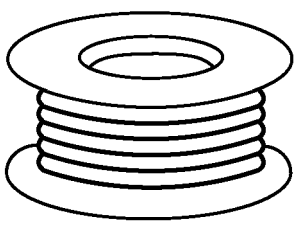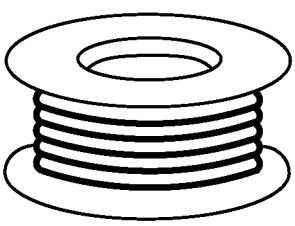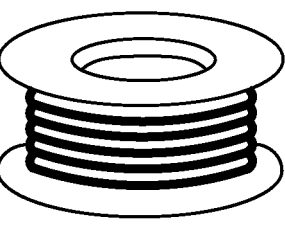0.3mm X 100g	0.6mm X 100g	1.0mm X 100g
		

3 Service Navigation

3.1. PCB Layout

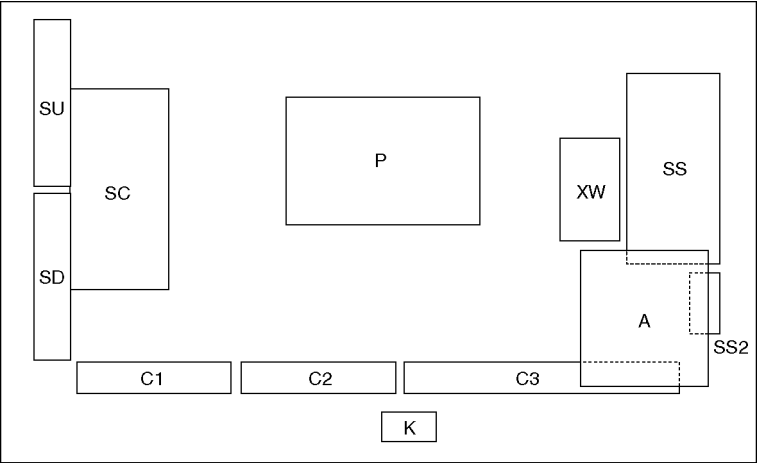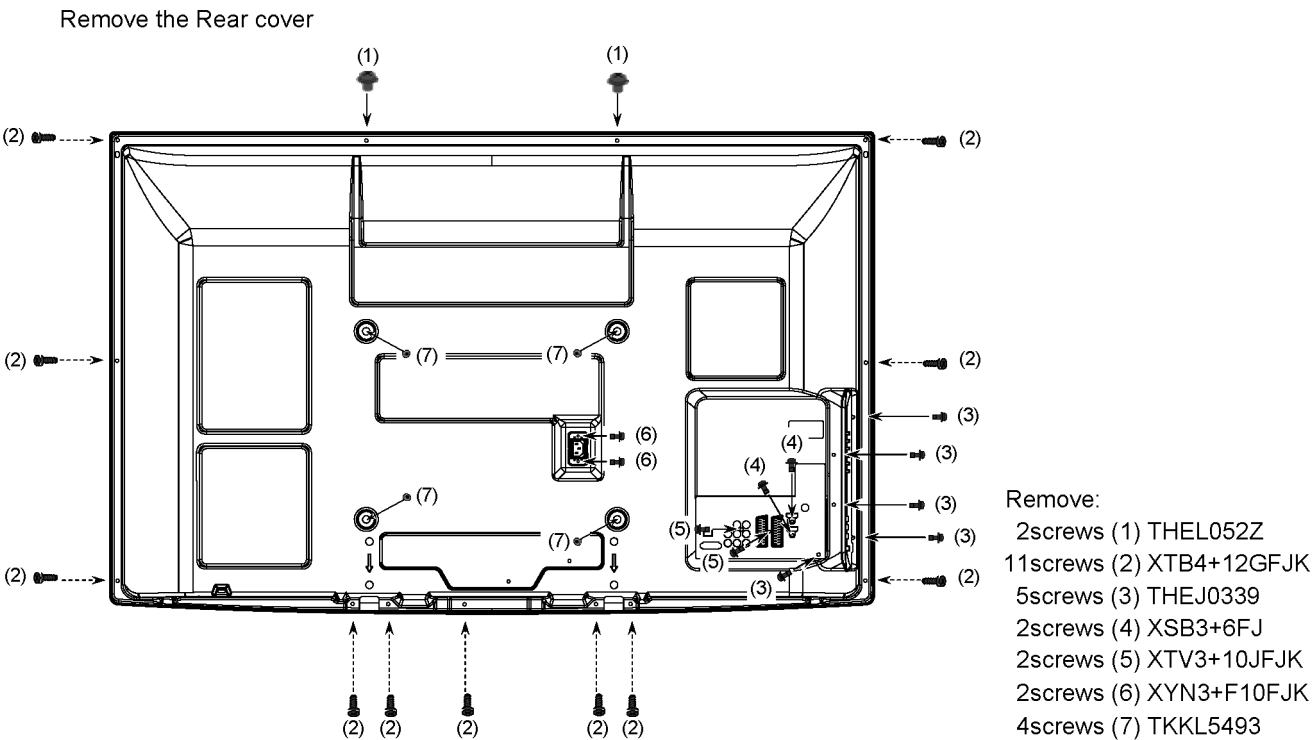

Board Name	Function	Board Name	Function
P	Power Supply	C1	Data Driver (Lower Right)
A	DC-DC Converter, Tuner Speaker out, AV Terminal, HDMI in, SD Card Digital Signal Processor, PEAKS-LDA2 Format Converter, Plasma AI, Sub-Field Processor Power Switch, Key Switch	C2	Data Driver (Lower Center)
K	Remote receiver, Power LED, C.A.T.S sensor	C3	Data Driver (Lower Left)
XW	DVB Tuner	SC	Scan Drive
		SS	Sustain Drive
		SS2	Sustain out (Lower)
		SU	Scan out (Upper) Non serviceable. SU-Board should be exchanged for service.
		SD	Scan out (Lower) Non serviceable. SD-Board should be exchanged for service.

3.2. Applicable signals

COMPONENT (Y, PB, PR), HDMI

* Mark: Applicable input signal for Component (Y, PB, PR) and HDMI

Signal name	COMPONENT	HDMI
525 (480) / 60i	*	*
525 (480) / 60p	*	*
625 (576) / 50i	*	*
625 (576) / 50p	*	*
750 (720) / 60p	*	*
750 (720) / 50p	*	*
1,125 (1,080) / 60i	*	*
1,125 (1,080) / 50i	*	*
1,125 (1,080) / 60p		*
1,125 (1,080) / 50p		*
1,125 (1,080) / 24p		*

PC (from HDMI terminal)

Applicable input signal for PC is basically compatible to HDMI standard timing.

Signal name	Horizontal frequency (kHz)	Vertical frequency (Hz)
640 × 480 @60 Hz	31.47	60.00
750 (720) / 60p	45.00	60.00
1,125 (1,080) / 60p	67.50	60.00

Note

- Signals other than above may not be displayed properly.
- The above signals are reformatted for optimal viewing on your display.
- PC signal is magnified or compressed for display, so that it may not be possible to show fine detail with sufficient clarity.

4 Specifications

Power Source	AC 220-240 V, 50 / 60 Hz	
Power Consumption	320 W	
Power Consumption in Standby mode	0.4 W (Without monitor out recording) 16 W (With monitor out recording)	
Display panel		
Aspect Ratio	16:9	
Visible screen size	127 cm (diagonal) 1,105 mm (W) × 622 mm (H)	
Number of pixels	2,073,600 (1,920 (W) × 1,080 (H)) [5,760 × 1,080 dots]	
Sound		
Speaker	160 mm × 40 mm × 2 pcs, 6 Ω	
Audio Output	20 W (10 W + 10 W)	
Headphones	M3 (3.5 mm) stereo mini Jack × 1	
Receiving Systems / Band name	DVB-T/T2 : Digital terrestrial services via UHF aerial input. PAL I : UHF E21-68 PAL 525/60 : Playback of NTSC tape from some PAL Video recorders (VCR) or NTSC disc playback from DVD player and recorder. M.NTSC : Playback from M.NTSC Video recorders (VCR). NTSC (AV input only) : Playback from NTSC Video recorders (VCR). UHF	
Aerial - input		
Operating Conditions	Temperature: 0 °C - 35 °C Humidity: 20 % - 80 % RH (non-condensing)	
Connection Terminals		
AV1 (Scart terminal)	21 Pin terminal (Audio/Video in, Audio/Video out, RGB in, Q-Link)	
AV2 (Scart terminal)	21 Pin terminal (Audio/Video in, Audio/Video out, RGB in, S-Video in, Q-Link)	
AV3		
VIDEO	RCA PIN Type × 1	1.0 V [p-p] (75 Ω)
AUDIO L - R	RCA PIN Type × 2	0.5 V [rms]
COMPONENT		
VIDEO	Y	1.0 V [p-p] (including synchronization)
	P _B , P _R	± 0.35 V [p-p]
AUDIO L - R	RCA PIN Type × 2	0.5 V [rms]
Others		
HDMI1 / 2 / 3	TYPE A Connectors HDMI1 / 3 : HDMI (Version 1.4 with Content Type) and HDMI (Version 1.3a with Deep Colour, x.v.Colour™) HDMI2 : HDMI (Version 1.4 with Content Type, Audio Return Channel) and HDMI (Version 1.3a with Deep Colour, x.v.Colour™) • This TV supports [HDAVI Control 5] function.	
Card slot	SD Card slot × 1 Common Interface slot × 1 RJ45, IEEE802.3 10BASE-T / 100BASE-TX	
ETHERNET		
Output		
AUDIO L - R	RCA PIN Type × 2	0.5 V [rms] (high impedance)
DIGITAL AUDIO OUT	PCM / Dolby Digital / DTS, Fiber optic	
Dimensions (W × H × D)	1,218 mm × 814 mm × 401 mm (With Pedestal) 1,218 mm × 769 mm × 93 mm (TV only)	
Mass	31.0 kg Net (With Pedestal) 29.0 kg Net (TV only)	

Note

- Design and Specifications are subject to change without notice. Mass and Dimensions shown are approximate.
- This equipment complies with the EMC standards listed below.
EN55013, EN61000-3-2, EN61000-3-3.

5 Technical Descriptions

5.1. Specification of KEY for CI Plus, DTCP-IP and One-to-One

5.1.1. General information:

1. EEPROM (IC8950) for spare parts has the seed of KEY for each.
2. The final KEY data will be generated by Peaks IC (IC8000) when SELF CHECK was done and are stored in both Peaks IC (IC8000) and EEPROM (IC8950).

Three KEY are not generated for all models.

The necessary KEY are only generated and stored depend on the feature of models.

5.1.2. Replacement of ICs:

When Peaks IC (IC8000) is replaced, EEPROM (IC8950) should be also replaced with new one the same time.

When EEPROM (IC8950) is replaced, Peaks IC (IC8000) is not necessary to be replaced the same time.

After the replacement of IC, SELF CHECK should be done to generate the final KEY data.

How to SELF CHECK: While pressing [VOLUME (-)] button on the main unit, press [MENU] button on the remote control for more than 3 seconds.

TV will be forced to the factory shipment setting after this SELF CHECK.


5.1.3. Model and Keys:

Model No.	Keys		
	CI Plus	DTCP-IP	One-to-One (For USB Rec.)
TX-P50S20B	None	None	None

6 Service Mode

6.1. How to enter into Service Mode

While pressing [VOLUME (-)] button of the main unit, press [0] button of the remote control three times within 2 seconds.

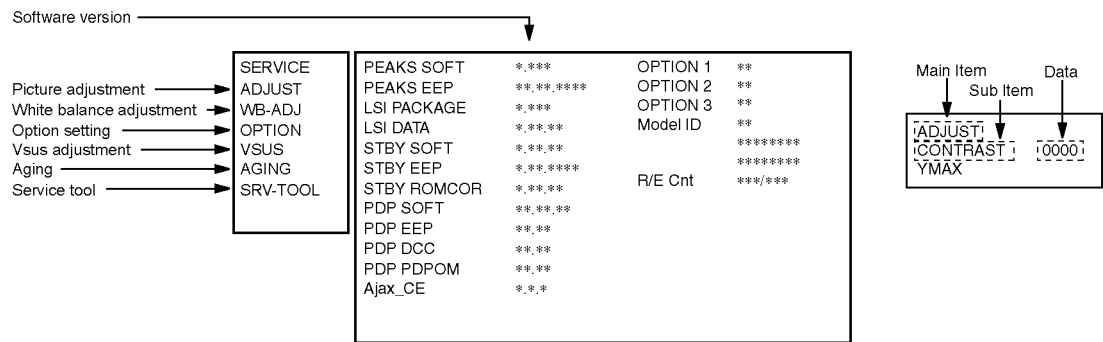

6.1.1. Key command

- [1] button...Main items Selection in forward direction
- [2] button...Main items Selection in reverse direction
- [3] button...Sub items Selection in forward direction
- [4] button...Sub items Selection in reverse direction
- [RED] button...All Sub items Selection in forward direction
- [GREEN] button...All Sub items Selection in reverse direction
- [VOL] button...Value of sub items change in forward direction (+), in reverse direction (-)

6.1.2. Contents of adjustment mode

- Value is shown as a hexadecimal number.
- Preset value differs depending on models.
- After entering the adjustment mode, take note of the value in each item before starting adjustment.

Main item	Sub item	Sample data	Remark
ADJUST	CONTRAST	23A	
	COLOR	2B	
	TINT	00	
	SUB-BRT	80C	
	H-POS	0	
	H-AMP	0	
	V-POS	0	
	V-AMP	0	
WB-ADJ	R-CUT	80	
	G-CUT	80	
	B-CUT	80	
	R-DRV	F1	
	G-DRV	FC	
	B-DRV	D0	
	ALL-CUT	80	
	ALL-DRV	FC	
OPTION	Panel-Type	50FHD	Factory Preset
	Boot	ROM	
	STBY-SET	00	
	EMERGENCY	ON	
	Y/C Delay	0	
	OPT 1	00011100	
	OPT 2	11101111	
	OPT 3	00000001	
	EDID-CLK	HIGH	
	MIRROR	00 (See next)	
VSUS			
AGING	ALL WHITE		Built-in test patterns can be displayed.
	AI ALL BLUE + WHITE FLAME		
	AI ALL GREEN		
	AI ALL RED		
	LOW STEP WHITE		
	LOW STEP BLUE		
	LOW STEP GREEN		
	LOW STEP RED		
	RAMP WHITE		
	RAMP RED		
	RAMP GREEN		
	RAMP BLUE		
	A-ZONE B-ZONE		
	1% WINDOW		
	COLOR BAR		
	9 POINT BRIGHTNESS		
	WHITE FLAME		
	AI ALL BLUE		
	TWICE FIXATION 1% WINDOW		
	SCROLL		
	ON/OFF OR RGBW		
	R/G/B/W AGING MODE		
	0.5 TIME FIXATION ALL WHITE		
	ALL WHITE WITH COUNT		
SRV-TOOL			see next

Destination	UK
Check sum	95e3
EDID	d1 ecdccc--

6.1.3. How to exit

Switch off the power with the [POWER] button on the main unit or the [POWER] button on the remote control.

6.2. Option - Mirror

Picture can be reversed left and right or up and down.
00 : Default (Normal picture is displayed)
01 : Picture is reversed left and right.
02 : Picture is reversed up and down.



Hint : If the defective symptom (e.g. Vertical bar or Horizontal bar) is moved by selection of this mirror, the possible cause is in A-board.

6.3. Service tool mode

6.3.1. How to access

- 1. Select [SRV-TOOL] in Service Mode.
- 2. Press [OK] button on the remote control.

SRV-TOOL			
Display of TD2Microcode version →	TD2Microcode:00500910		
Display of Flash ROM maker code →	Flash ROM : 1 - 227E		
Display of SOS History →	PTCT : 00 . 00 . 00 . 00 . 00	Time 00000:40	On/Off 0000022 ← POWER ON TIME/COUNT Press [MUTE] button (3sec)

6.3.2. Display of SOS History

SOS History (Number of LED blinking) indication.
From left side; Last SOS, before Last, three occurrence before, 2nd occurrence after shipment, 1st occurrence after shipment.
This indication will be cleared by [Self-check indication and forced to factory shipment setting].

6.3.3. POWER ON Time, On/Off

Note : To display TIME/COUNT menu, highlight position, then press MUTE for 3sec.
Time : Cumulative power on time, indicated hour : minute by decimal
On/Off : Number of On/Off switching by decimal
Note : This indication will not be cleared by either of the self-checks or any other command.

6.3.4. Exit

- 1. Disconnect the AC cord from wall outlet or switch off the power with [Power] button on the main unit.

6.4. Hotel mode

1. Purpose

Restrict a function for hotels.

2. Access command to the Hotel mode setup menu


In order to display the Hotel mode setup menu, please enter the following command **(within 2 second)**.

[TV] : Vol. [Down] + [REMOTE] : AV (3 times)

Then, the Hotel mode setup menu is displayed.

Hotel Mode	
Hotel Mode	Off
Initial INPUT	Off
Initial POS	Off
Initial VOL Level	Off
Maximum Vol Level	100
Button Lock	Off
Remote Lock	Off

Select


 EXIT
 Change
 RETURN

3. To exit the Hotel mode setup menu

Disconnect AC power cord from wall outlet.

4. Explain the Hotel mode setup menu


item	Function
Hotel Mode	Select hotel mode ON/OFF
Initial INPUT	Select input signal modes. Set the input, when each time power is switched on. Selection : Off/Analog/DVB/AV1/AV2/AV2S/AV3/COMPONENT/HDMI1/HDMI2/HDMI3 <ul style="list-style-type: none"> Off: give priority to a last memory. However, Euro model is compulsorily set to TV. AVnS/AVnC: only Euro model selectable PC: selectable with VGA option
Initial POS	Select programme number. Selection : Off/0 to 99 <ul style="list-style-type: none"> Off: give priority to a last memory
Initial VOL level	Adjust the volume when each time power is switched on. Selection/Range : Off/0 to 100 <ul style="list-style-type: none"> Off: give priority to a last memory
Maximum VOL level	Adjust maximum volume. Range : 0 to 100
Button lock	Select local key conditions. Selection : Off/SETUP/MENU/ALL <ul style="list-style-type: none"> Off: altogether valid SETUP: only F-key is invalid (Tuning guide (menu) can not be selected.) MENU: only F-key is invalid (only Volume/Mute can be selected.) ALL: altogether invalid.
Remote lock	Select remote control key conditions. Selection : Off/SETUP/MENU <ul style="list-style-type: none"> Off: altogether valid SETUP: only Setup menu is invalid MENU: Picture/Sound/Setup menu are invalid

6.5. Data Copy by SD Card

6.5.1. Purpose


(a) Board replacement (Copy the data when exchanging A-board):

When exchanging A-board, the data in original A-board can be copied to SD card and then copy to new A-board.

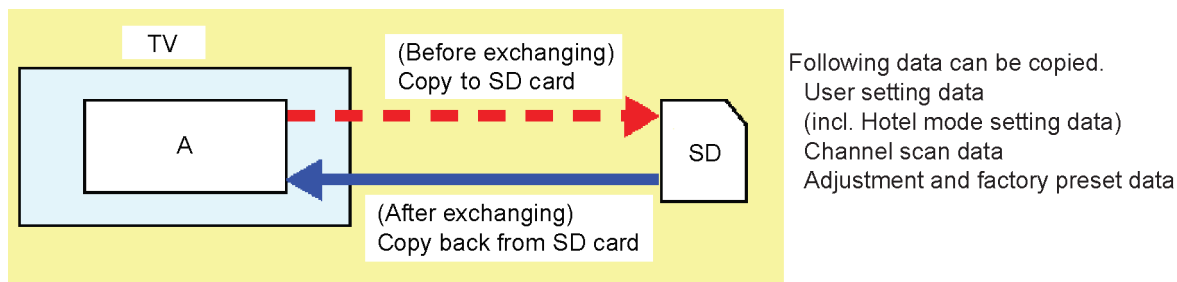

(b) Hotel (Copy the data when installing a number of units in hotel or any facility):

When installing a number of units in hotel or any facility, the data in master TV can be copied to SD card and then copy to other TVs.

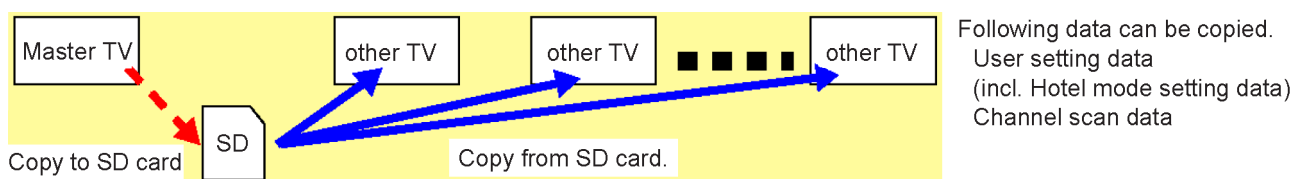

6.5.2. Preparation

Make pwd file as startup file for (a) or (b) in a empty SD card.

1. Insert a empty SD card to your PC.
2. Right-click a blank area in a SD card window, point to New, and then click text document. A new file is created by default (New Text Document.txt).
3. Right-click the new text document that you just created and select rename, and then change the name and extension of the file to the following file name for (a) or (b) and press ENTER.

File name:

(a) For Board replacement : boardreplace.pwd

(b) For Hotel : hotel.pwd

Note:

Please make only one file to prevent the operation error.

No any other file should not be in SD card.


6.5.3. Data copy from TV set to SD Card

1. Turn on the TV set.
2. Insert SD card with a startup file (pwd file) to SD slot.
On-screen Display will be appeared according to the startup file automatically.
3. Input a following password for (a) or (b) by using remote control.
(a) For Board replacement : 2770
(b) For Hotel : 4850
Data will be copied from TV set to SD card.
It takes around 2 to 6 minutes maximum for copying.
4. After the completion of copying to SD card, remove SD card from TV set.
5. Turn off the TV set.

Note:

Following new folder will be created in SD card for data from TV set.

- (a) For Board replacement : user_setup
- (b) For Hotel : hotel

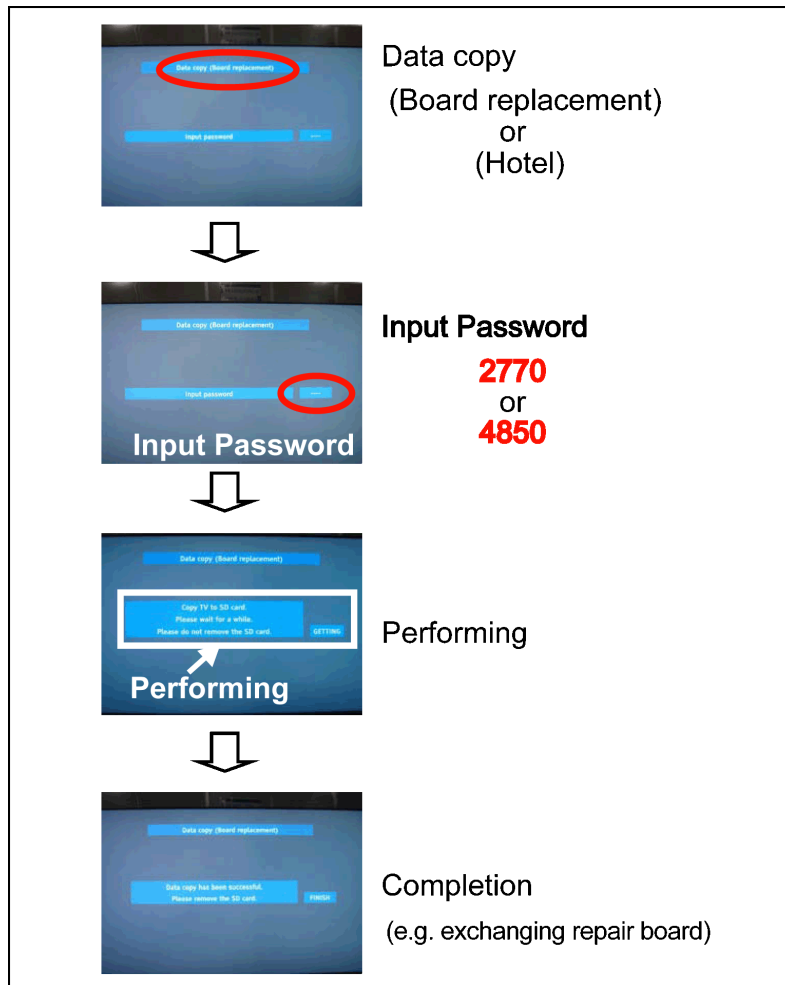


6.5.4. Data copy from to SD Card to TV set

1. Turn on the TV set.
2. Insert SD card with Data to SD slot.
On-screen Display will be appeared according to the Data folder automatically.
3. Input a following password for (a) or (b) by using remote control.
(a) For Board replacement : 2771
(b) For Hotel : 4851
Data will be copied from SD card to TV set.
4. After the completion of copying to SD card, remove SD card from TV set.
(a) For Board replacement : Data will be deleted after copying (Limited one copy).
(b) For Hotel : Data will not be deleted and can be used for other TVs.
5. Turn off the TV set.

Note:

1. Depending on the failure of boards, function of Data copy for board replacement does not work.
2. This function can be effective among the same model numbers.

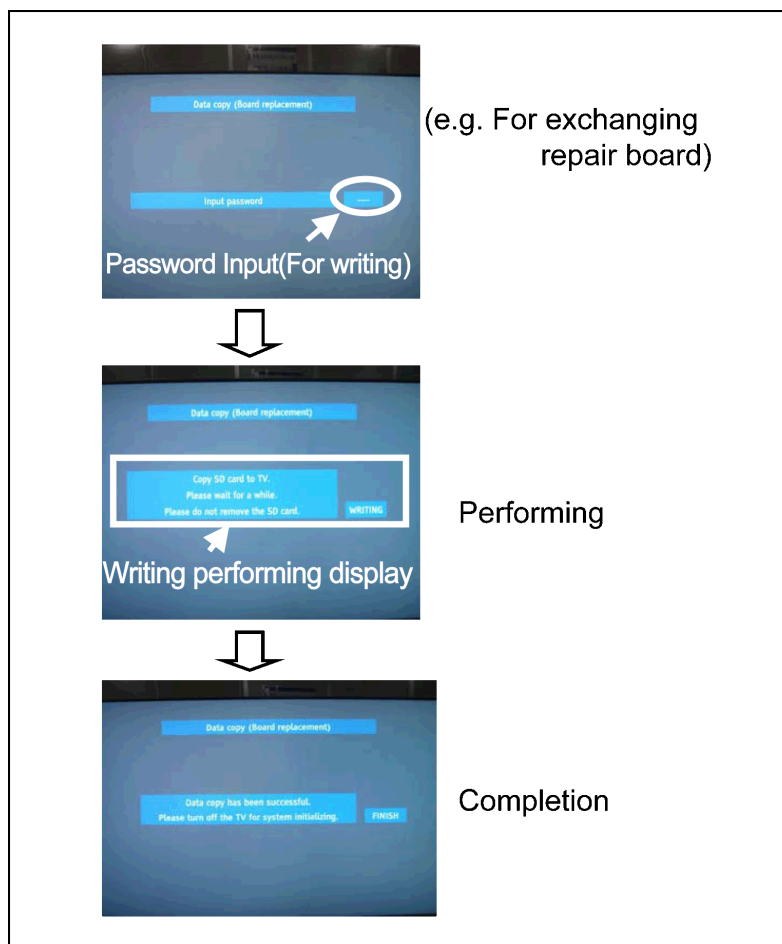

7 Troubleshooting Guide

Use the self-check function to test the unit.

1. Checking the IIC bus lines
2. Power LED Blinking timing

7.1. Check of the IIC bus lines

7.1.1. How to access

7.1.1.1. Self-check indication only:

Produce TV reception screen, and while pressing [VOLUME (-)] button on the main unit, press [OK] button on the remote control for more than 3 seconds.

7.1.1.2. Self-check indication and forced to factory shipment setting:

Caution:

New key will be generated and previous TV programmes recorded in USB HDD will not be viewed. (See Chap.5)

Produce TV reception screen, and while pressing [VOLUME (-)] button on the main unit, press [MENU] button on the remote control for more than 3 seconds.

7.1.2. Screen display

50FHD SET		Panasonic 2010 PDP SELF CHECK COMPLETE	
TUN	OK	PEAKS-SOFT	*****
STBY	OK	PEAKS-EEP	*****
MEM1	OK	LSI-PACKAGE	*****
MEM2	OK	LSI-RELEASE	*****
ADAM	OK	STBY-SOFT	*****
AVSW	OK	STBY-EEP	*****
PDROM	OK	STBY-ROMCORR	*****
OFDM	OK	PDP-MCU	*****
TEMP	OK	PDP-EEP	*****
VIF	OK	PDP-DCC	*****
LAN	OK	PDP-PDPOM	*****
3rd FE	OK	FRC-EEP	*****
ID	OK		
		SUM	*****
		Model ID	*****
		EDID	*****

7.1.3. Check Point

Confirm the following parts if NG was displayed.

Display	Ref. No.	Description	P.C.B.
TUN	TU2901	TUNER	A-Board
STBY	IC1100	MPU	A-Board
MEM1	IC1101	EEPROM (MPU)	A-Board
MEM2	IC8950	EEPROM (PEAKS-LDA2)	A-Board
ADAM	IC8000	A-chip (PEAKS-LDA2)	A-Board
AVSW	IC3001	Audio/Video SW	A-Board
PDROM	IC9300	PD4H	A-Board
OFDM	IC8300	Digital demodulator	A-Board
TEMP	IC1000	Temp Sensor	A-Board
VIF	TU2901	TUNER	A-Board
LAN	IC8703	Ethernet IF	A-Board
3rd FE	IC6851	FRONT END	XW-Board

7.1.4. Exit

Disconnect the AC cord from wall outlet or switch off the power with [Power] button on the main unit.












7.2. Power LED Blinking timing chart

1. Subject

Information of LED Flashing timing chart.

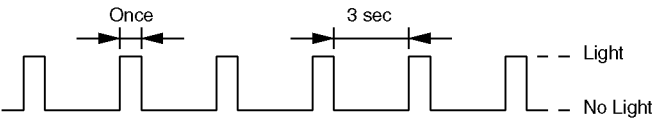2. Contents

When an abnormality has occurred the unit, the protection circuit operates and reset to the stand by mode. At this time, the defective block can be identified by the number of blinks of the Power LED on the front panel of the unit.

Blinking Times	Blinking timing	Contents	Check point
1		Unknown SOS	-
		Panel information SOS PD4 Start SOS	-
2		15V SOS	A-Board
3		3.3V SOS	A-Board
4		Power SOS	P-Board
5		5V SOS	A-Board
6		Driver SOS1 (SC Energy recovery circuit) (A-SC FPC DET)	SC-Board A-SC FPC
7		Driver SOS2 (SU/SD Connector DET) (SU/SD Scan and Logic IC)	SU-Board SD-Board *
8		Driver SOS3 (SS FPC DET) (SS Energy recovery circuit)	SS-Board SS2-Board
9		Discharge Control SOS	A-Board
10		Sub 5V SOS Sub 3.3V SOS Sub 9V SOS Tuner Power SOS	A-Board SC-Board SS-Board P-Board
12		Sound SOS	A-Board Speaker


*Use SC jig to isolate the board.

7.3. No Power


First check point

There are following 2 states of No Power indication by power LED.


1. No lit
2. Red is lit then turns red blinking a few seconds later. (See 6.2.)

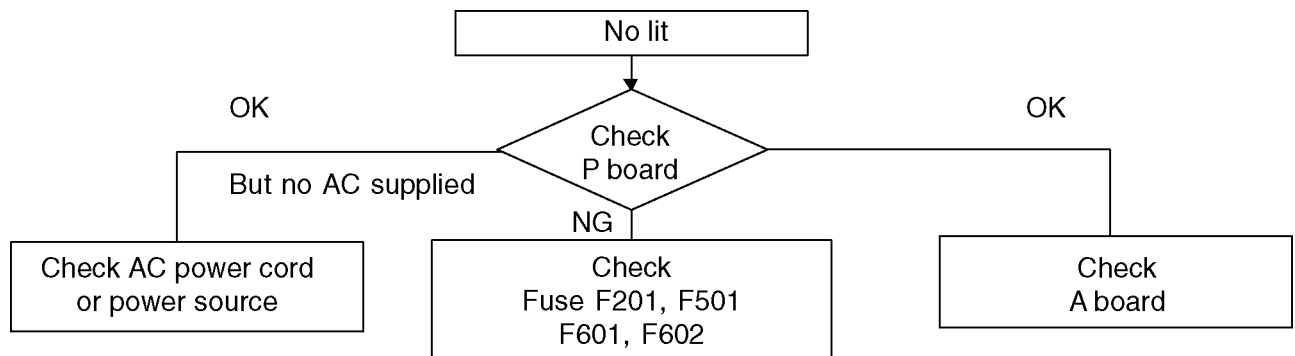

7.4. No Picture

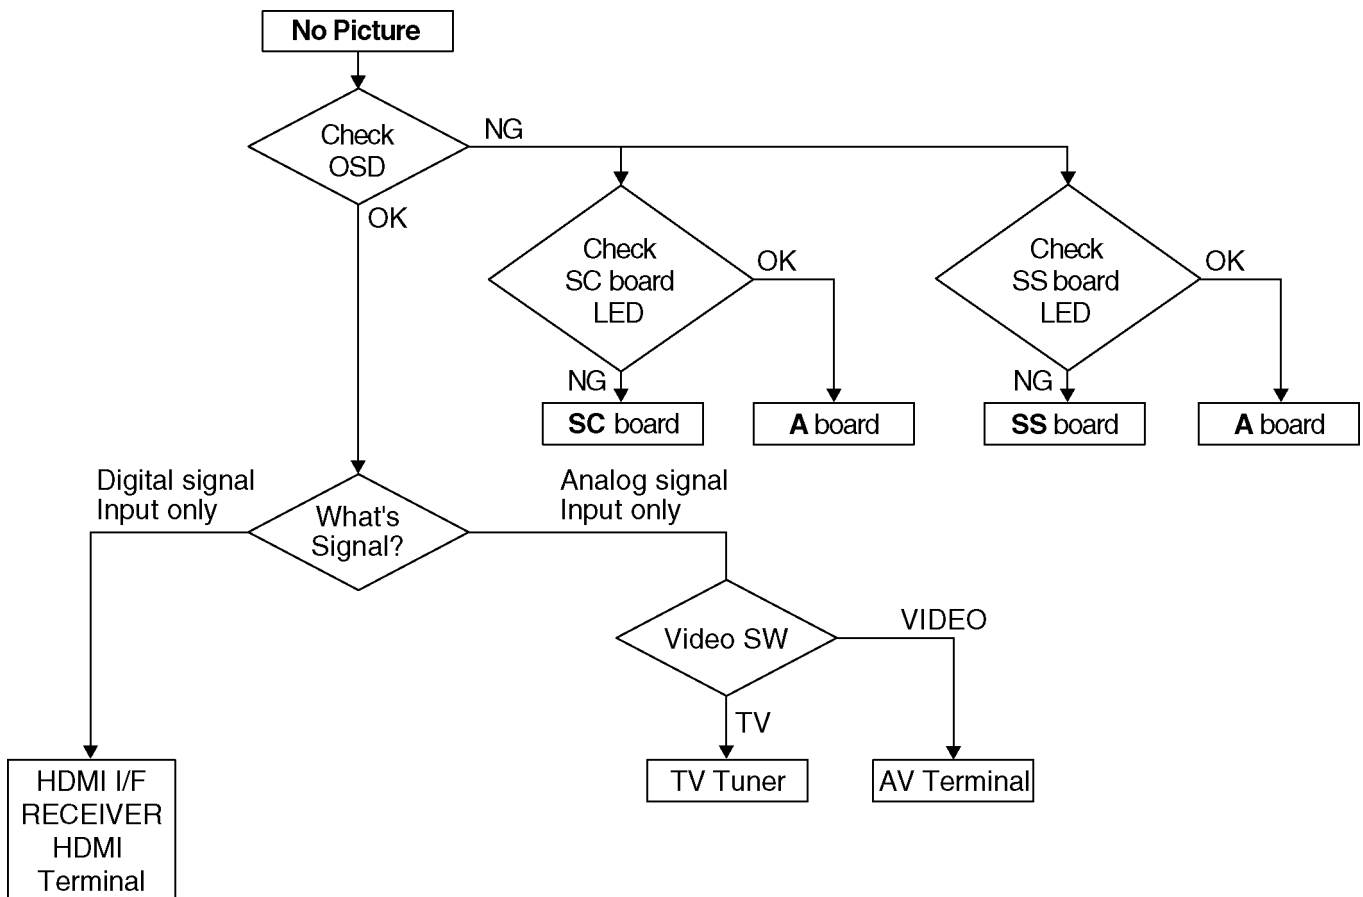

Drive circuits LED indicator

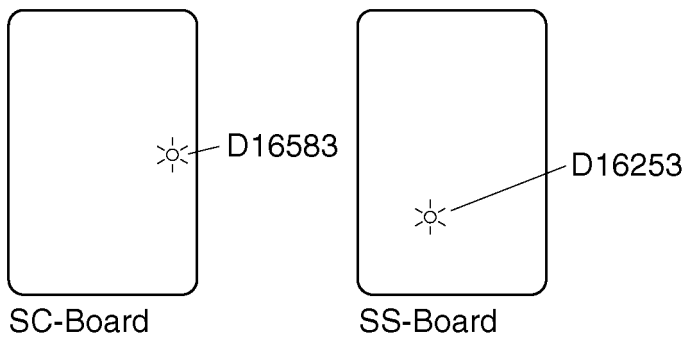

7.5. Local screen failure

Plasma display may have local area failure on the screen. Fig-1 is the possible defect P.C.B. for each local area.

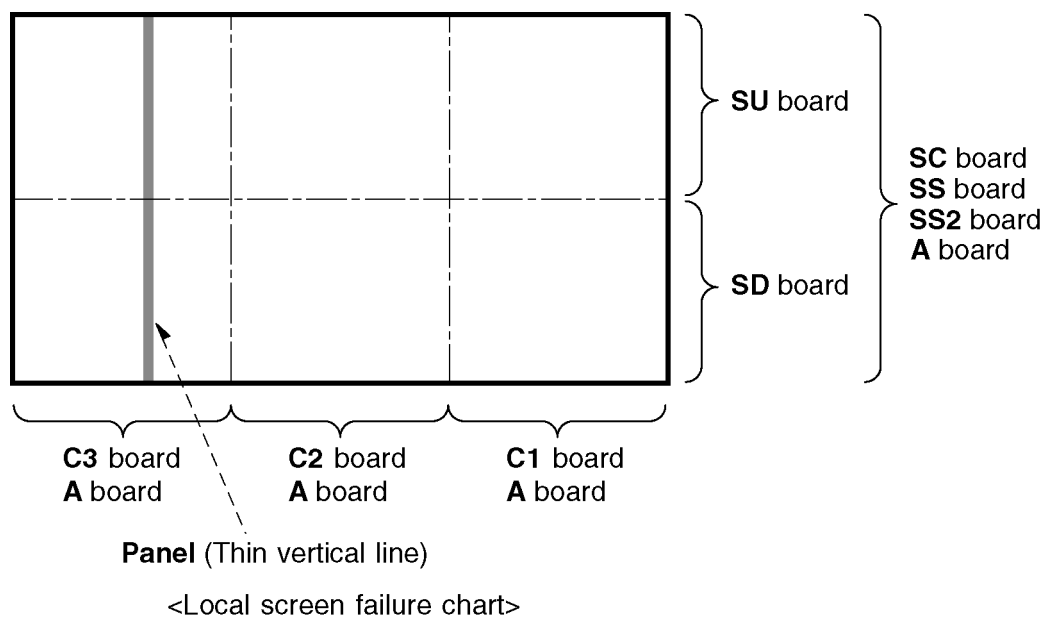


Fig-1

8 Service Fixture & Tools

8.1. SC jig

Purpose:

To find the failure board (SC or SU/SD) when the power LED is blinking 7 times.

SC jig:

Jumper connector to connect to SC50 connector on SC board

Part number:


TZSC09187

How to use:

Caution: Remove SC jig from SC board after inspection.

1. Remove all connector between SC board and SU/SD board to isolate SC board from both SU and SD board electrically.
Note: The board will be damaged if all connector is not removed (for example; remove connector only for SU board and stay connecting with SD board. The board will be damaged.)
2. Connect SC jig to connector SC50 at left bottom side of SC board
3. Turn of the TV/Display Unit and confirm the power LED blinking.
LED blinking: Possible cause of failure is in SC board
No LED blinking (Lighting or no lighting): Possible cause of failure is in SU or SD board
4. After inspection, turn off the TV/Display Unit and wait a few minutes to discharge.
5. Remove SC jig from SC board.

Remark: This SC jig can be used for all 2010 Plasma TV and Plasma Display.

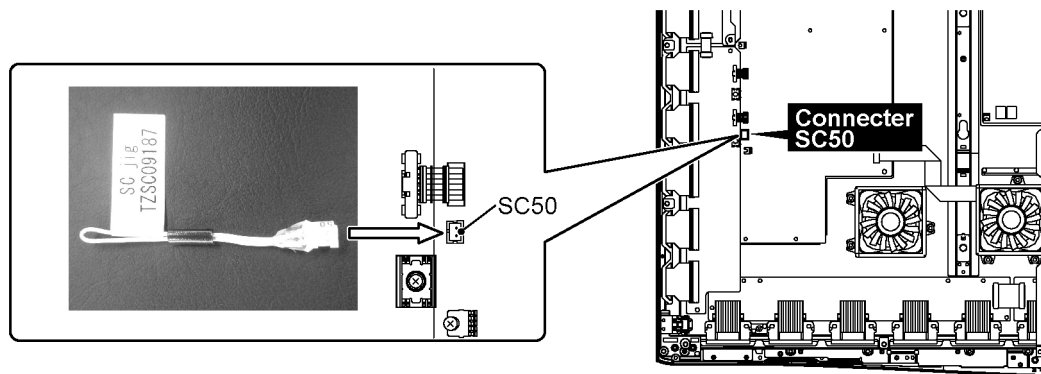

9 Disassembly and Assembly Instructions

9.1. Remove the Rear cover


1. See PCB Layout (Section 3)

9.2. Remove the AC inlet

Caution:

To remove P.C.B. wait 1 minute after power was off for discharge from electrolysis capacitors.

1. Unlock the cable claspers to free the cable.
2. Disconnect the connector (P9).
3. Remove the screw (×1 ➡) and remove the AC inlet.

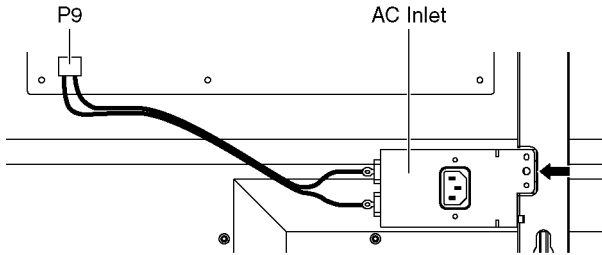


9.3. Remove the P-Board

Caution:


To remove P.C.B. wait 1 minute after power was off for discharge from electrolysis capacitors.

1. Unlock the cable claspers to free the cable
2. Disconnect the connectors (P2, P6, P7, P9, P11 and P35).
3. Remove the screws (×9 ➡) and remove the P-Board.

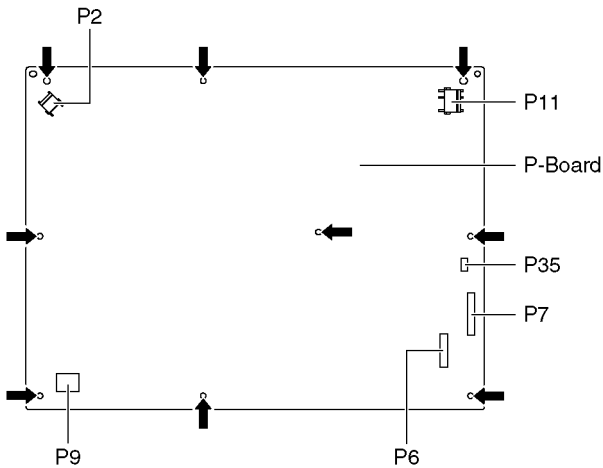


9.4. Remove the Side terminal cover and the Side shield metal

1. Remove the screws (×2 ➡, ×1 ➡, ×1 ➡).
2. Remove the Side terminal cover.

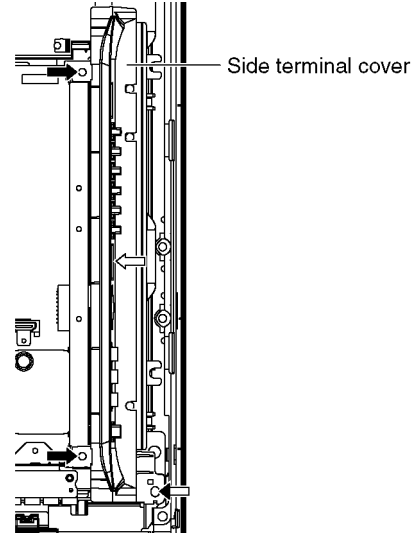


3. Remove the Side shield metal.

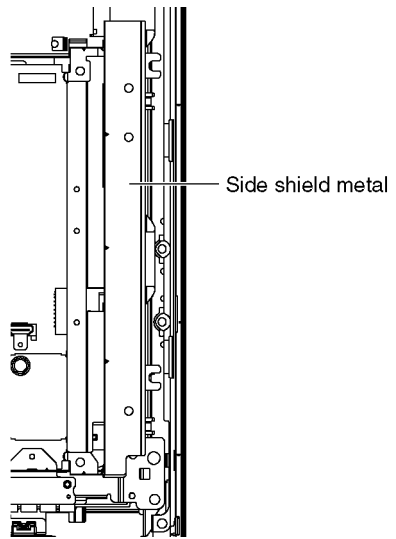


9.5. Remove the Tuner unit

1. Remove the Side terminal cover and the Side shield metal. (See section 9.4.)
2. Unlock the cable clampers to free the cable.
3. Disconnect the connectors (A1, A6, A7 and A11).
4. Disconnect the flexible cables (A20, A31, A32 and A88A).
5. Remove the screws (×2 ➡) and remove the Tuner unit.

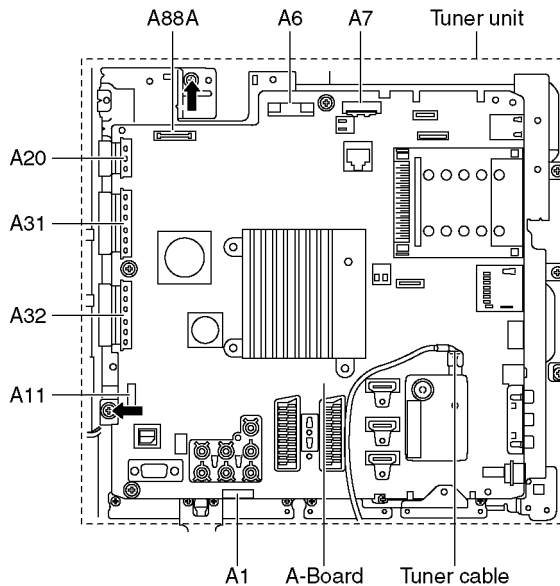


9.6. Remove the A-Board

1. Remove the Tuner unit. (See section 9.5.)
2. Remove the screws (×3 ➡) and remove the A-Board.

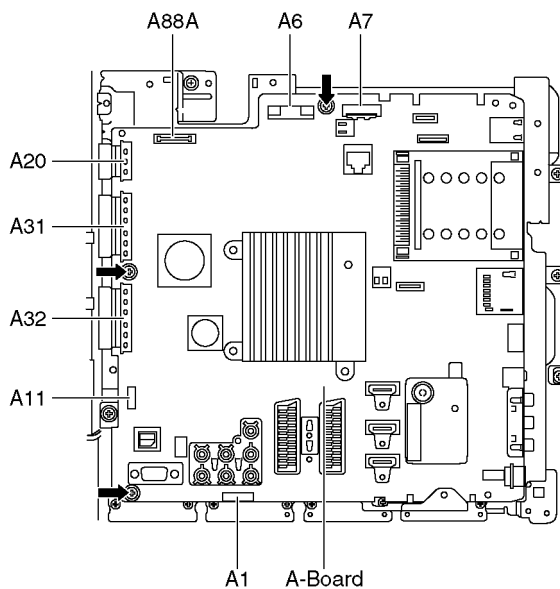


9.7. Remove the XW-Board

1. Unlock the cable clampers to free the cable.
2. Disconnect the Tuner cable.
3. Disconnect the flexible cable (XW3).
4. Remove the screws (×3 ➡) and remove the XW-Board unit.

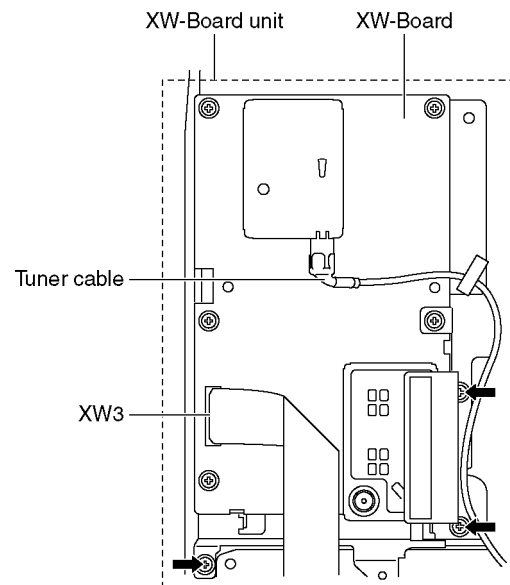


5. Remove the screws (×6 ➡) and remove the XW-Board.

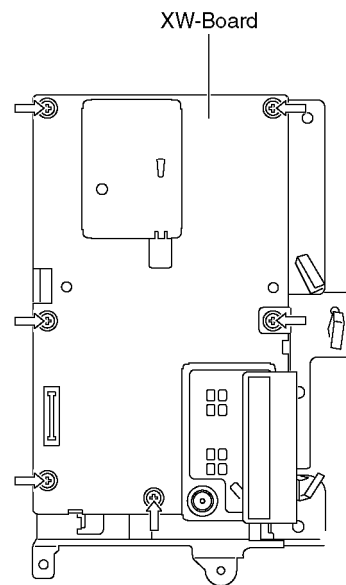


9.8. Remove the Speakers

1. Unlock the cable claspers to free the cable.
2. Disconnect the Speaker terminal.
3. Remove the screws (×2 ➡ each) and remove the Speakers (L, R).

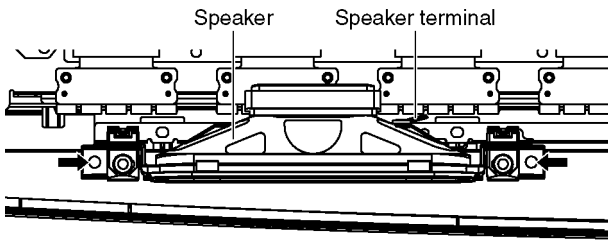


9.9. Remove the SU-Board

1. Remove the flexible cables (SU1, SU2, SU3, SU4 and SU5) connected to the SU-Board.
2. Remove the flexible cable (SU11-SD11) and the bridge connector (SC41-SU41).
3. Remove the molding prop (×1 ⇨).
4. Remove the screws (×2 ➡, ×2 ⇨) and remove the SU-Board.

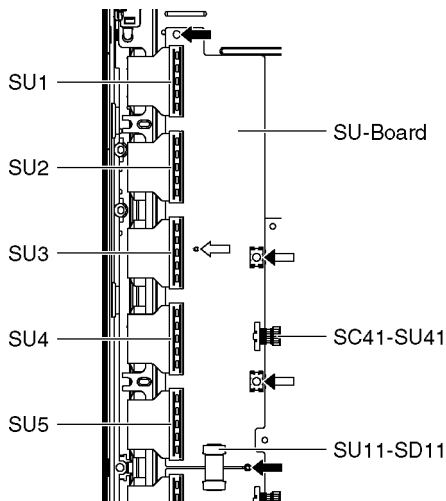


9.10. Remove the SD-Board

1. Remove the flexible cables (SD1, SD2, SD3, SD4 and SD5) connected to the SD-Board.
2. Remove the flexible cable (SU11-SD11) and the bridge connectors (SC42-SD42 and SC46-SD46).
3. Remove the molding prop (×1 ⇨).
4. Remove the screws (×2 ➡, ×2 ⇨) and remove the SD-Board.

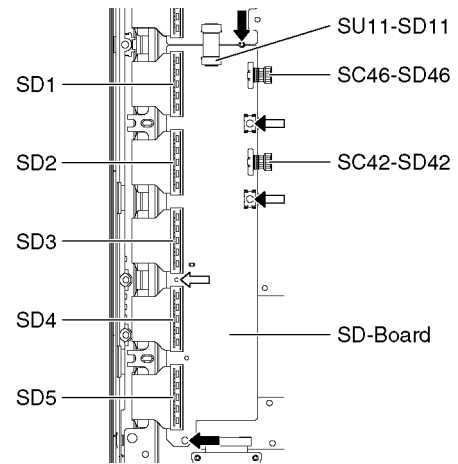


9.11. Remove the SC-Board

1. Remove the SU-Board and SD-Board. (See section 9.9. and 9.10.)
2. Unlock the cable claspers to free the cable.
3. Disconnect the connector (SC2).
4. Disconnect the flexible cable (SC20).
5. Remove the screws (×6 ➡) and remove the SC-Board.

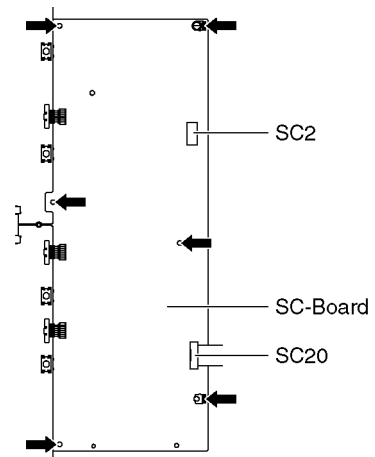


9.12. Remove the SS2-Board

1. Remove the Tuner unit. (See section 9.5.)
2. Disconnect the bridge connector (SS21-SS24) and disconnect the flexible cable (SS58).
3. Remove the screws (×2 ➡) and remove the SS2-Board.

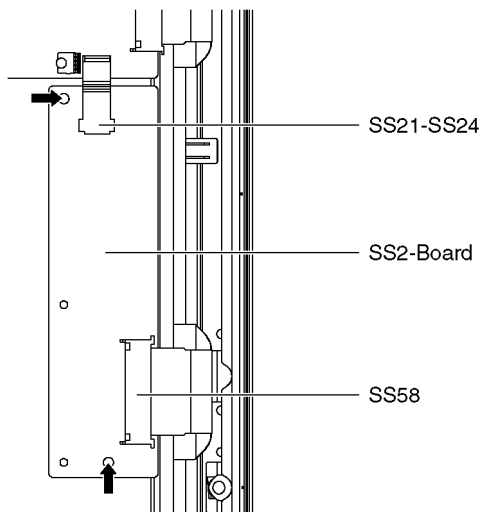


9.13. Remove the SS-Board

1. Remove the Tuner unit. (See section 9.5.)
2. Unlock the cable clampers to free the cable.
3. Disconnect the connectors (SS11 and SS33).
4. Disconnect the flexible cables (SS53 and SS56).
5. Disconnect the bridge connector (SS21-SS24).
6. Remove the screws (×6 ➡) and remove the SS-Board.

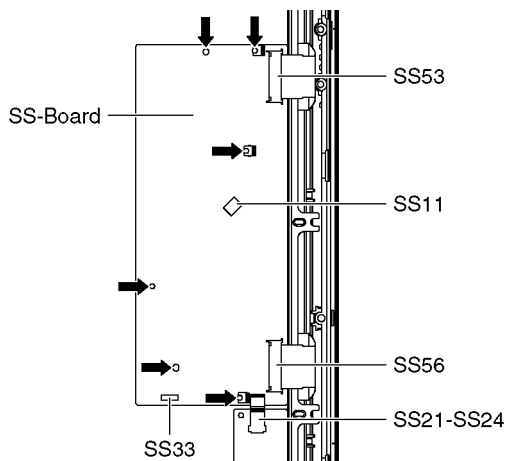


9.14. Remove the Hanger metals and the Stand brackets

1. Remove the Plasma panel section from the servicing stand and lay on a flat surface such as a table (covered by a soft cloth) with the Plasma panel surface facing downward.
2. Remove the Stand brackets (L, R) fastening screws (×3 ➡ each) and the Stand brackets (L, R).

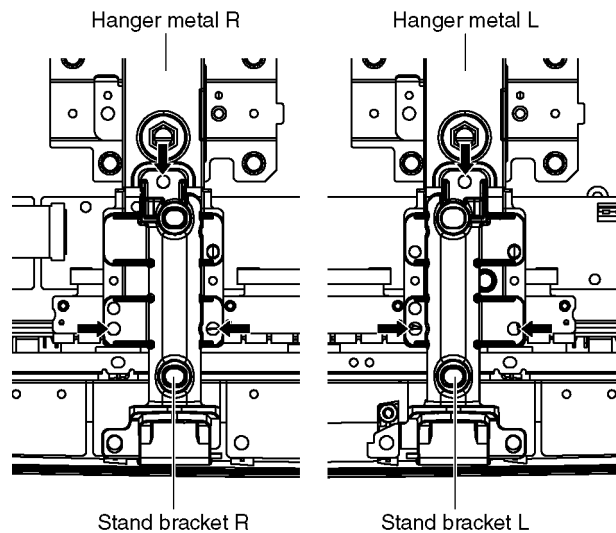


3. Remove the Hanger metals (L, R) fastening screws (×2 ➡ each) and remove the Hanger metals (L, R).

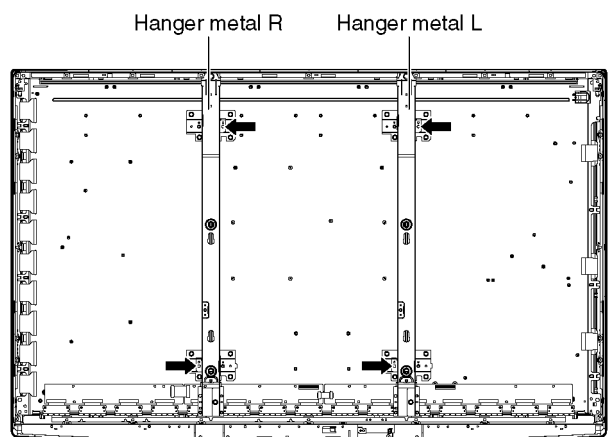


9.15. Remove the C1-Board

1. Remove the flexible cables holder fastening screws (×8 ⇨).
2. Disconnect the flexible cables (CB1, CB2, CB3 and CB4).
3. Disconnect the flexible cable (C10).
4. Remove the screws (×4 ➡) and remove the C1-Board.

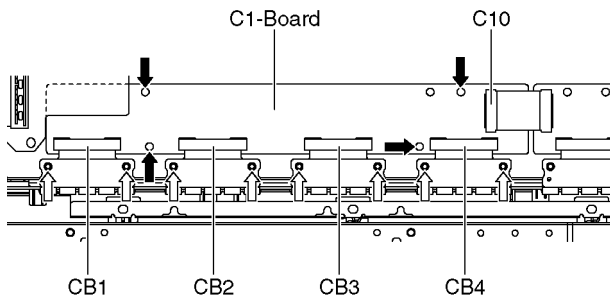


9.16. Remove the C2-Board

1. Remove the Hanger metal R and the Stand bracket R. (See section 9.14.)
2. Remove the flexible cables holder fastening screws (×8 ⇨).
3. Disconnect the flexible cables (CB5, CB6, CB7 and CB8).
4. Disconnect the flexible cables (C20, C21 and C26).
5. Remove the screws (×4 ➡) and remove the C2-Board.

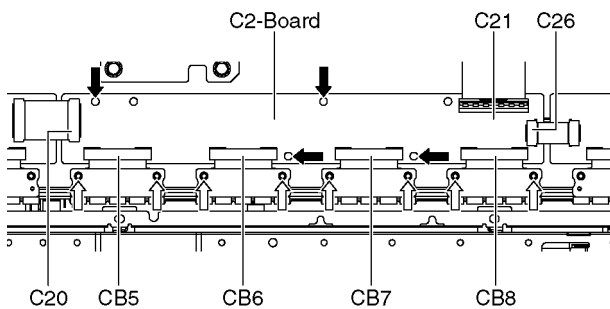


9.17. Remove the C3-Board

1. Remove the Tuner unit. (See section 9.5.)
2. Remove the Hanger metal L and the Stand bracket L. (See section 9.14.)
3. Remove the flexible cables holder fastening screws (×14 ⇨).
4. Disconnect the flexible cables (CB9, CB10, CB11, CB12, CB13, CB14 and CB15).
5. Disconnect the flexible cables (C31 and C36).
6. Disconnect the connectors (C33 and C35).
7. Remove the screws (×5 ➡) and remove the C3-Board.

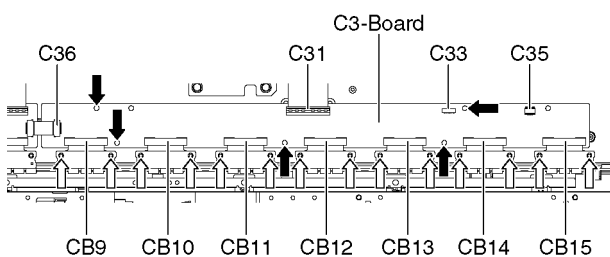


9.18. Remove the Plasma panel section from the Cabinet assy (glass)

1. Remove the cabinet assy and the plasma panel fastening screws (×3 ➡).

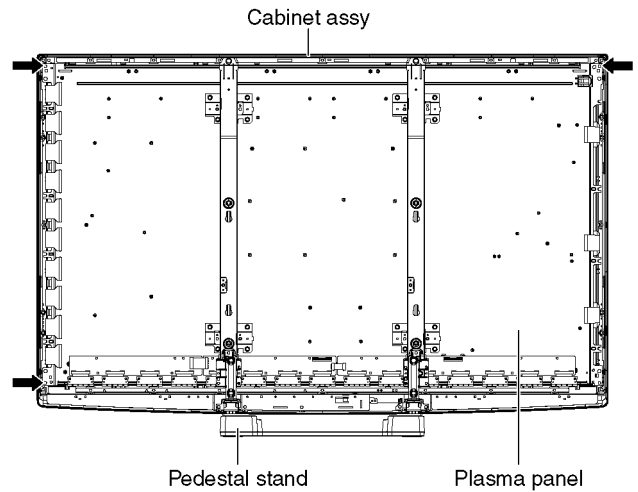


2. For leaving the plasma panel from the front frame, pull the bottom of the cabinet assy forward, lift, and remove.

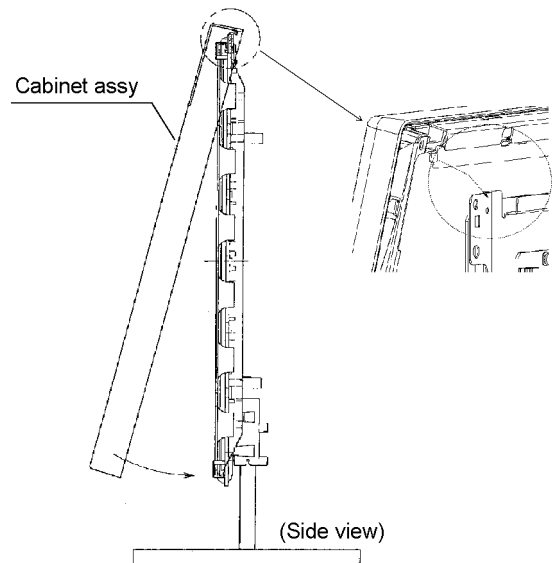


9.19. Remove the Glass holders

1. Remove the Cabinet assy. (See section 9.18.)
2. Remove the screws (×7 ➡).
3. Remove the Glass holder bottom rear.
4. Remove the screws (×4 ➡).
5. Remove the Glass holder side (L, R).
6. Remove the screws (×7 ⇨).
7. Remove the Glass holder top rear and the Glass holder top front.
8. Remove the Glass holder bottom front.

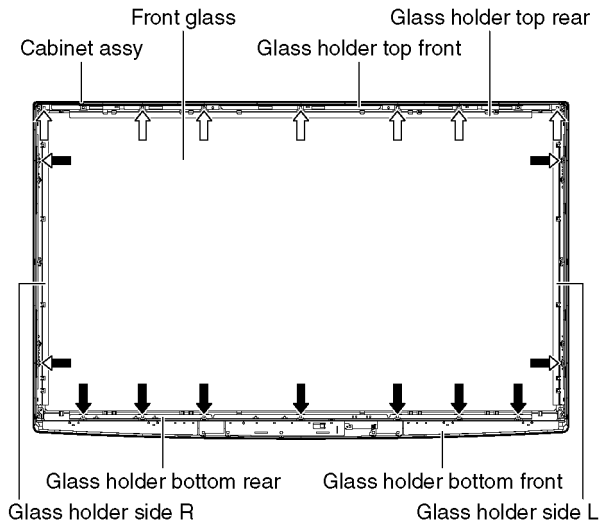

9.20. Remove the K-Board

1. Remove the Glass holders. (See section 9.19.)
2. Remove the screws (×2 ➡).
3. Remove the claws (×2 ⇨).
4. Disconnect the connector (K1) and Remove the K-Board from LED Panel.

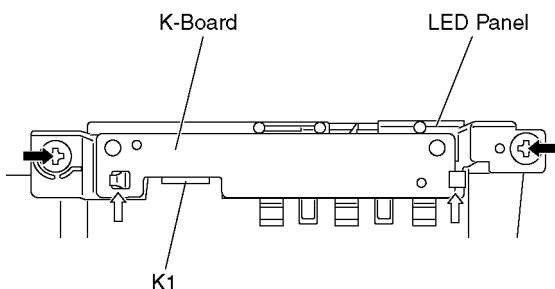

9.21. Replace the plasma panel

Caution:

A new plasma panel itself without Hanger metals is fragile.

To avoid the damage to new plasma panel, carry a new plasma panel taking hold of the Hanger metals after assembling the Hanger metals and the Stand brackets.

1. Place a carton box packed a new plasma panel on the flat surface of the work bench.
2. Open a box and without taking a new plasma panel; Attach the C1-Board, C2-Board and the C3-Board, connect the flexible cables from the plasma panel to the C1-Board, C2-Board and the C3-Board, and fit the flexible cable holders.
3. Attach the Hanger metals and the Stand brackets to the new plasma panel.
4. Place the plasma panel on the servicing stand taking hold of the Hanger metals.
5. Attach the cabinet assy and each P.C.Board and so on, to the new plasma panel.

***When fitting the cabinet assy, be careful not to allow any debris, dust or handling residue to remain between the front glass and plasma panel.**

10 Measurements and Adjustments

10.1. Adjustment

10.1.1. Vsus selection


Caution:

When Plasma panel or A-board is replaced, Vsus should be set to LOW or HIGH.

Procedure


1. Go into main item [VSUS] in Service Mode. LOW or HIGH will be displayed.
2. Press [OK] button to go to TEST stage.
White pattern without On-Screen Display will be displayed during TEST and CONF stage. Press [5] button to display the On-Screen Display.
3. Press [VOL (-)] button to set to LOW.
4. In LOW setting
 - a. If no several dead pixel is visible remarkably in white pattern, press [3] button to go to CONF stage.
 - b. If the several dead pixels are visible remarkably in white pattern, Set to HIGH by press [VOL (+)] button. Press [3] button to go to CONF stage if the symptom is improved.
5. Press [OK] button in CONF stage to store LOW or HIGH.
6. Exit Service Mode by pressing [Power] button.


Vsus selection in Service mode

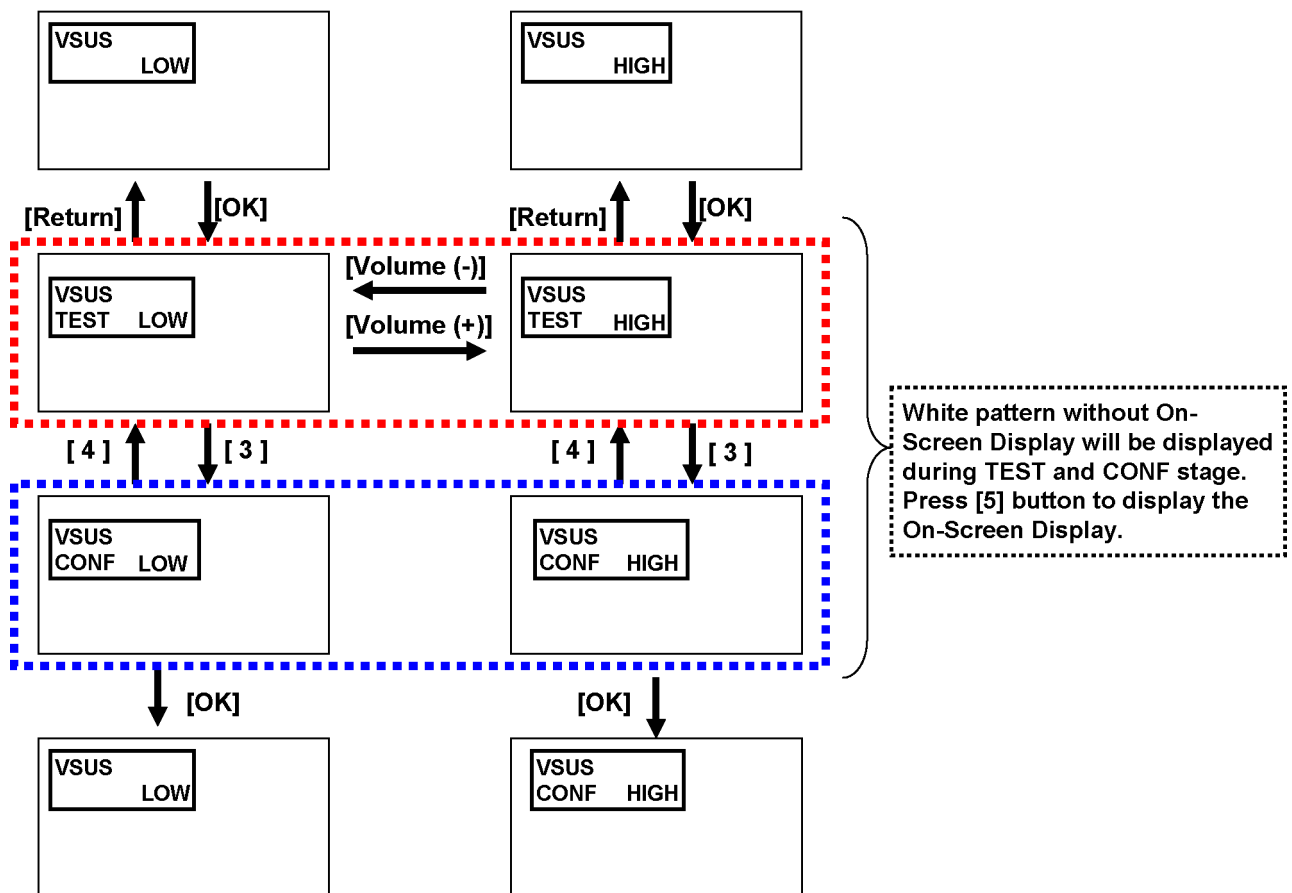

10.1.2. Sub-Contrast adjustment

Name of measuring instrument	Connection	Remarks													
RF generator Base Band signal generator HD signal generator															
Steps		Remarks													
Adjustment of TV (RF system)		Note: Sub-contrast adjustment is unadjusted for AV/ HD input. But, when needing the adjustment chosen manually, please refer to [alternative method].													
Note: In adjustment, you must setting to modulation of signal at 80%. 1. Receive a RF PAL 100% Full White or Split Colour bar shown as below. <div><table><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td colspan="2">100% White</td><td></td><td></td><td></td></tr></table></div> 2. Goes into service adjustment mode. 3. Push a [1] or [2] key, and goes into adjustment mode for [CONTRAST].												100% White			
		100% White													
Adjustment															
1. The colour key yellow button of remote control is pushed. 2. The OSD character of sub-contrast becomes red. (Inside under automatic adjustment) 3. The OSD character of sub-contrast returns to black. 4. End.															

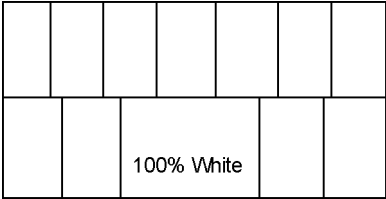Steps	Remarks
<p><u>Another procedure</u></p> <p>Adjustment of AV system</p> <p>1. PAL 100% Full White or Split Colour bar receive AV1(or AV2), shown as below.</p>  <p>2. Goes into service adjustment mode. 3. Push [1] or [2] key, and goes into adjustment mode for [Contrast].</p> <p>Adjustment</p> <p>1. The colour key yellow button of remote control is pushed. 2. The OSD character of sub-contrast becomes red. (Inside under automatic adjustment) 3. The OSD character of sub-contrast returns to black. 4. End.</p>	

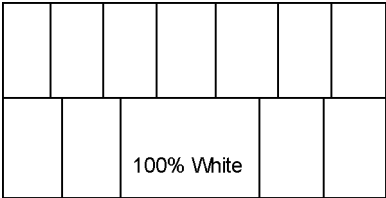
Steps	Remarks
<p><u>Another procedure</u></p> <p>Adjustment of HD system</p> <p>1. At 1080i 100% Full White or Split colour bar receive component signal, as shown below.</p>  <p>2. Goes into service adjustment mode. 3. Push [1] or [2] key, and goes into adjustment mode for [Contrast].</p> <p>Adjustment</p> <p>1. The colour key yellow button of remote control is pushed. 2. The OSD character of sub-contrast becomes red. (Inside under automatic adjustment) 3. The OSD character of sub-contrast returns to black. 4. End.</p>	

10.1.3. White balance adjustment


Name of measuring instrument	Connection	Remarks												
W/ B pattern Color analyzer (Minolta CA-100 or equivalent)	Panel surface													
Steps		Remarks												
<ul style="list-style-type: none"> • Make sure the front panel to be used on the final set is fitted. • Make sure a color signal is not being shown before adjustment. • Put the color analyzer where there is little colour variation. 		Picture menu : Dynamic ASPECT : 16:9												
Adjustment		Remarks												
<p>1. Enter the Service mode menu. Please receive the external signal. Or, please select CVBS/YUV (no sync).</p> <p>2. A number key [1] or [2] are operated and [WB-ADJ] is displayed. Check that the color balance is [COOL].</p> <p>3. A number key [0] is operated and select [METHOD].</p> <p>4. A number key [5] is operated and [INNER PATTERN] is displayed.</p> <div data-bbox="304 629 774 922" data-label="Image"> </div> <p style="text-align: center;">INNER PATTERN</p> <p>5. Select [G-CUTOFF] item, using the number-key [3] or [4], and set to [80], using the volume-key [+] or [-]. Also, [B-CUTOFF] and [R-CUTOFF] set to [80]</p> <p>6. Set [G-DRIVE] at [D0].</p> <p>7. Touch the signal receiver of color analyzer to the INNER PATTERN's center, and adjust B drive and R drive so x, y become the [COLOR TEMP COOL] in the below table1.</p> <p>8. All RGB drive increase so that the maximum drive value of RGB may become [FF]. ([ALL-DRIVE] set to [FF].)</p> <p>9. Set color balance to [NORMAL] using [7] key.</p> <p>10. Fix G-CUTOFF, B-CUTOFF and R-CUTOFF at [80].</p> <p>11. Set [G-DRIVE] at [D0].</p> <p>12. Adjust B-DRIVE and R-DRIVE so the INNER PATTERN's x, y become the [COLOR TEMP NORMAL] in the below table1.</p> <p>13. All RGB drive increase so that the maximum drive value of RGB may become [FF]. ([ALL-DRIVE] set to [FF].)</p> <p>14. Set color balance to [WARM] using [7] key.</p> <p>15. Fix G-CUTOFF, B-CUTOFF and R-CUTOFF at [80].</p> <p>16. Set [G-DRIVE] at [D0].</p> <p>17. Adjust B-DRIVE and R-DRIVE so the INNER PATTERN's x, y become the [COLOR TEMP WARM] in the below table1.</p> <p>18. All RGB drive increase so that the maximum drive value of RGB may become [FF]. ([ALL-DRIVE] set to [FF].)</p> <p style="text-align: center;">Table 1, Color temp. target value</p> <table border="1"> <thead> <tr> <th>COLOR TEMP</th><th>x</th><th>y</th></tr> </thead> <tbody> <tr> <td>COOL</td><td>0.274</td><td>0.282</td></tr> <tr> <td>NORMAL</td><td>0.296</td><td>0.318</td></tr> <tr> <td>WARM</td><td>0.310</td><td>0.334</td></tr> </tbody> </table>		COLOR TEMP	x	y	COOL	0.274	0.282	NORMAL	0.296	0.318	WARM	0.310	0.334	METHOD=01 copy adjustments
COLOR TEMP	x	y												
COOL	0.274	0.282												
NORMAL	0.296	0.318												
WARM	0.310	0.334												

11 Block Diagram


11.1. Main Block Diagram

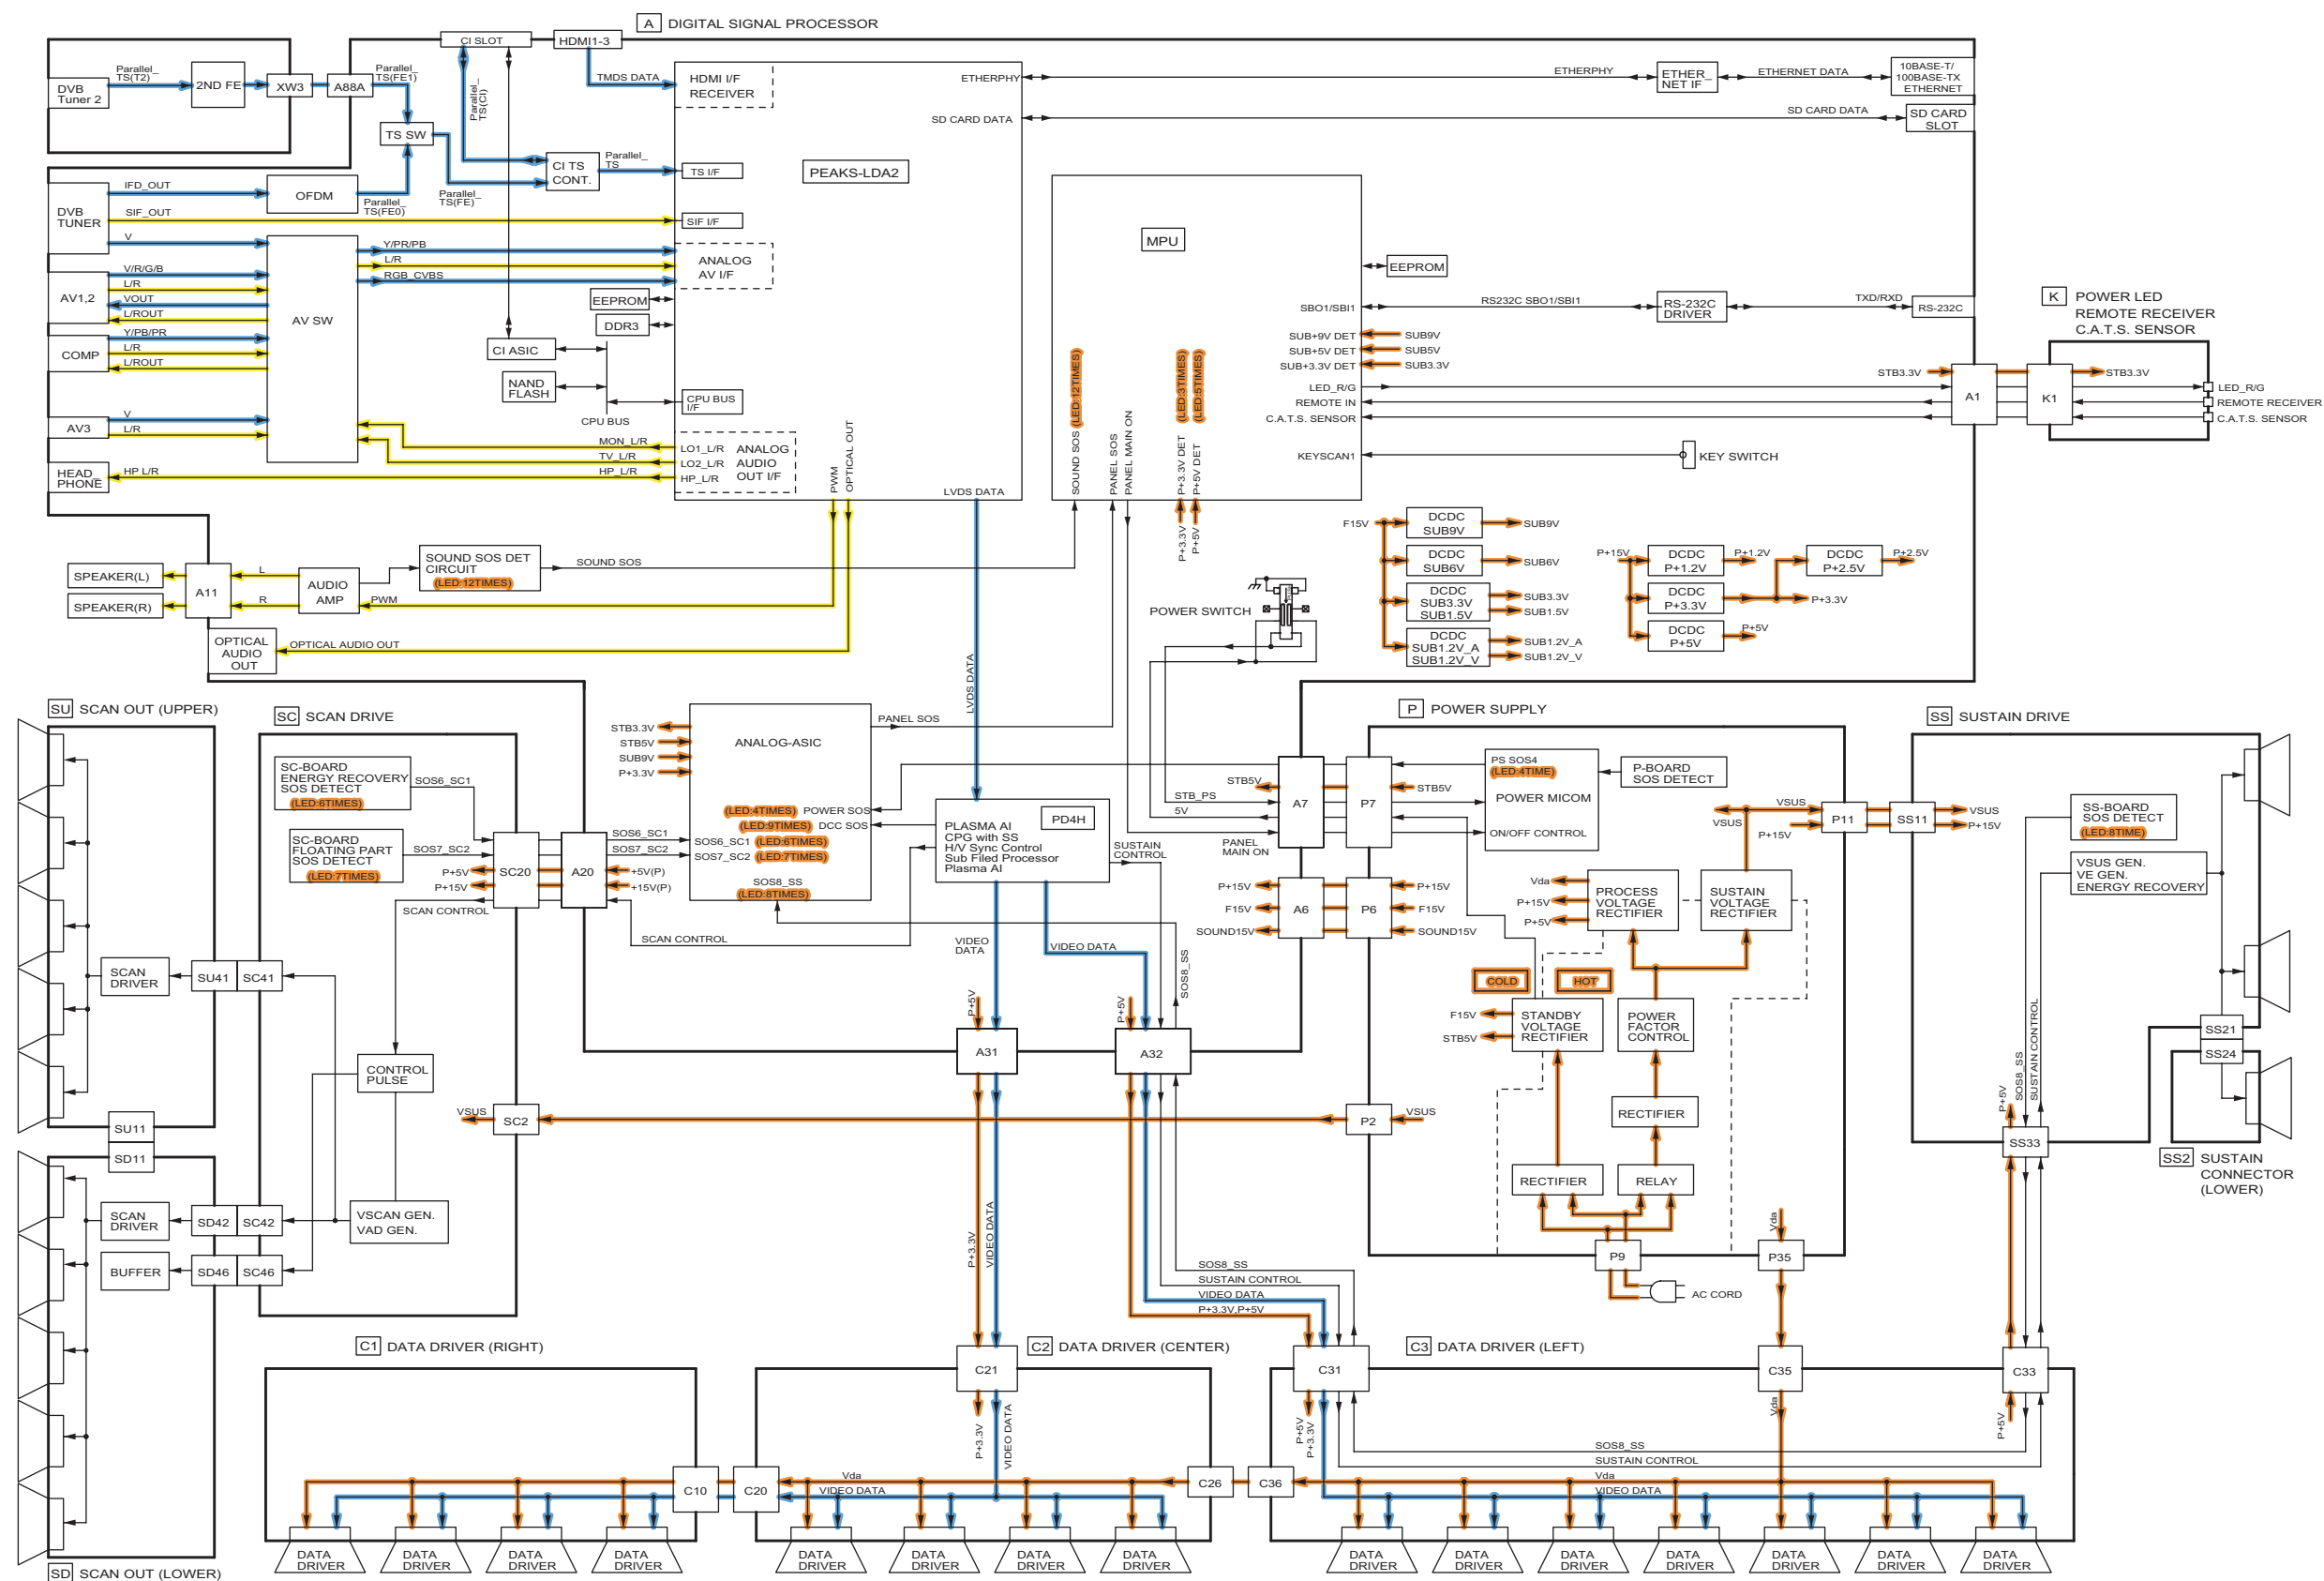


11.2. Block (1/5) Diagram

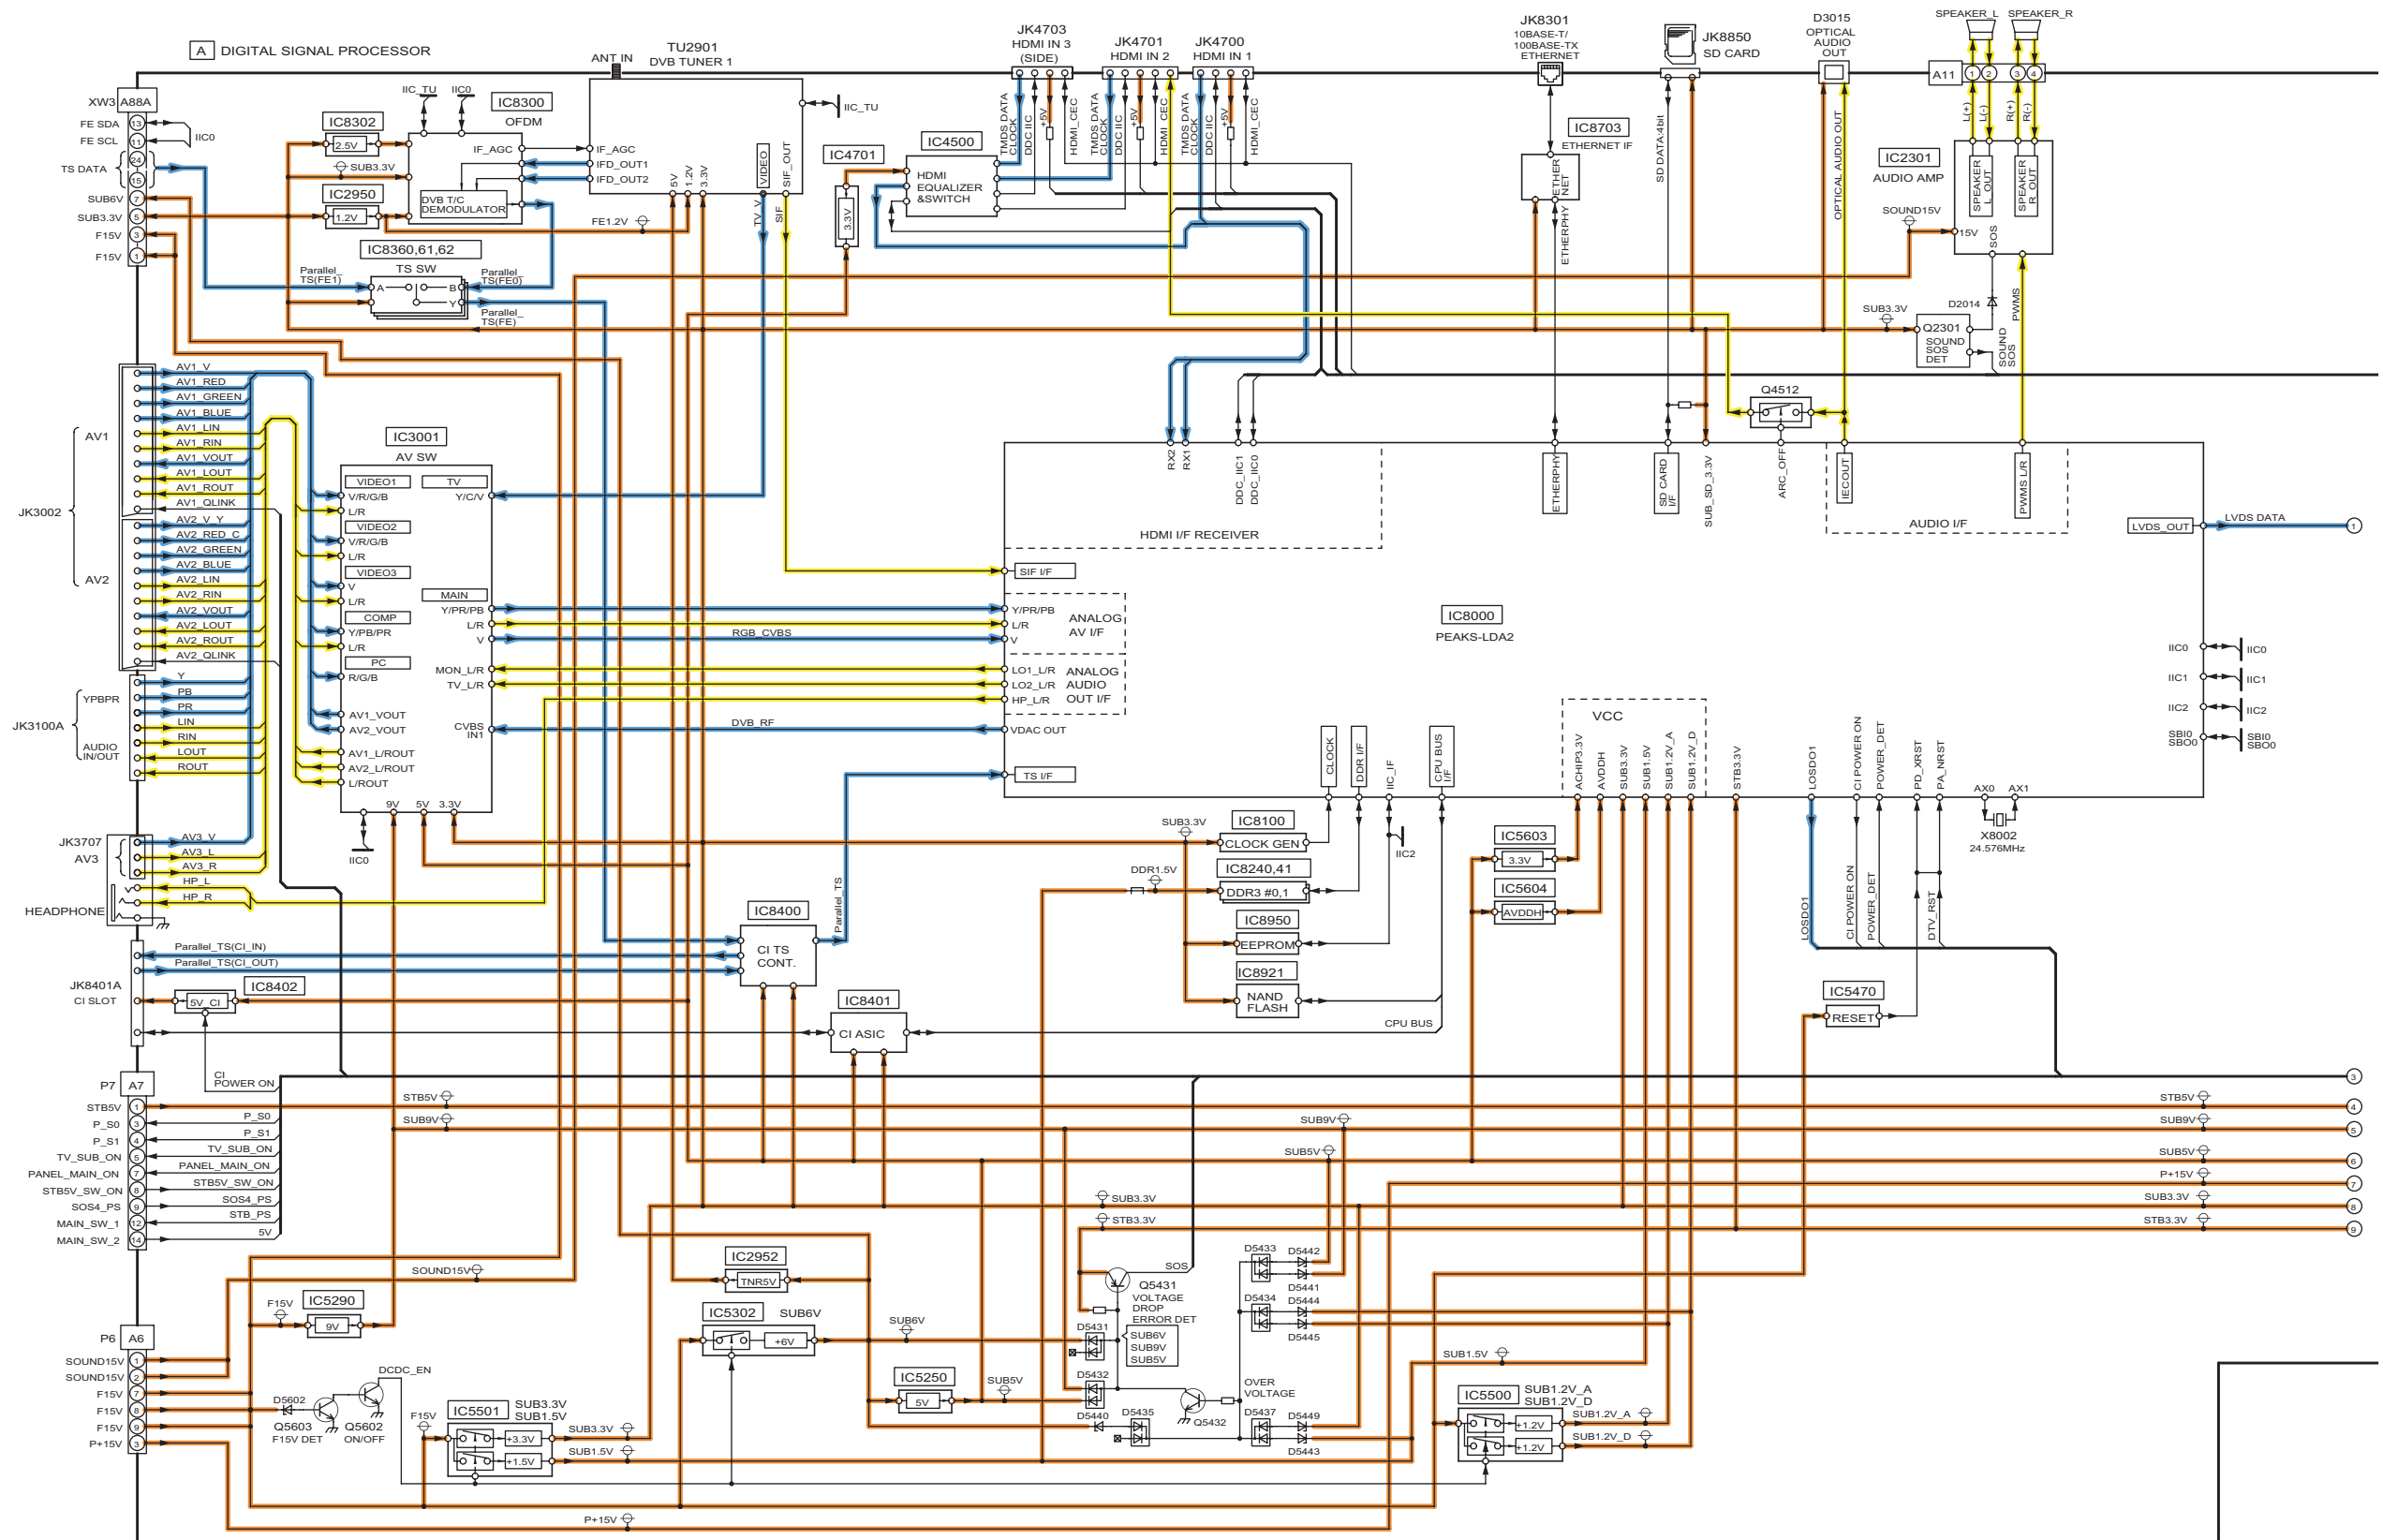


11.3. Block (2/5) Diagram

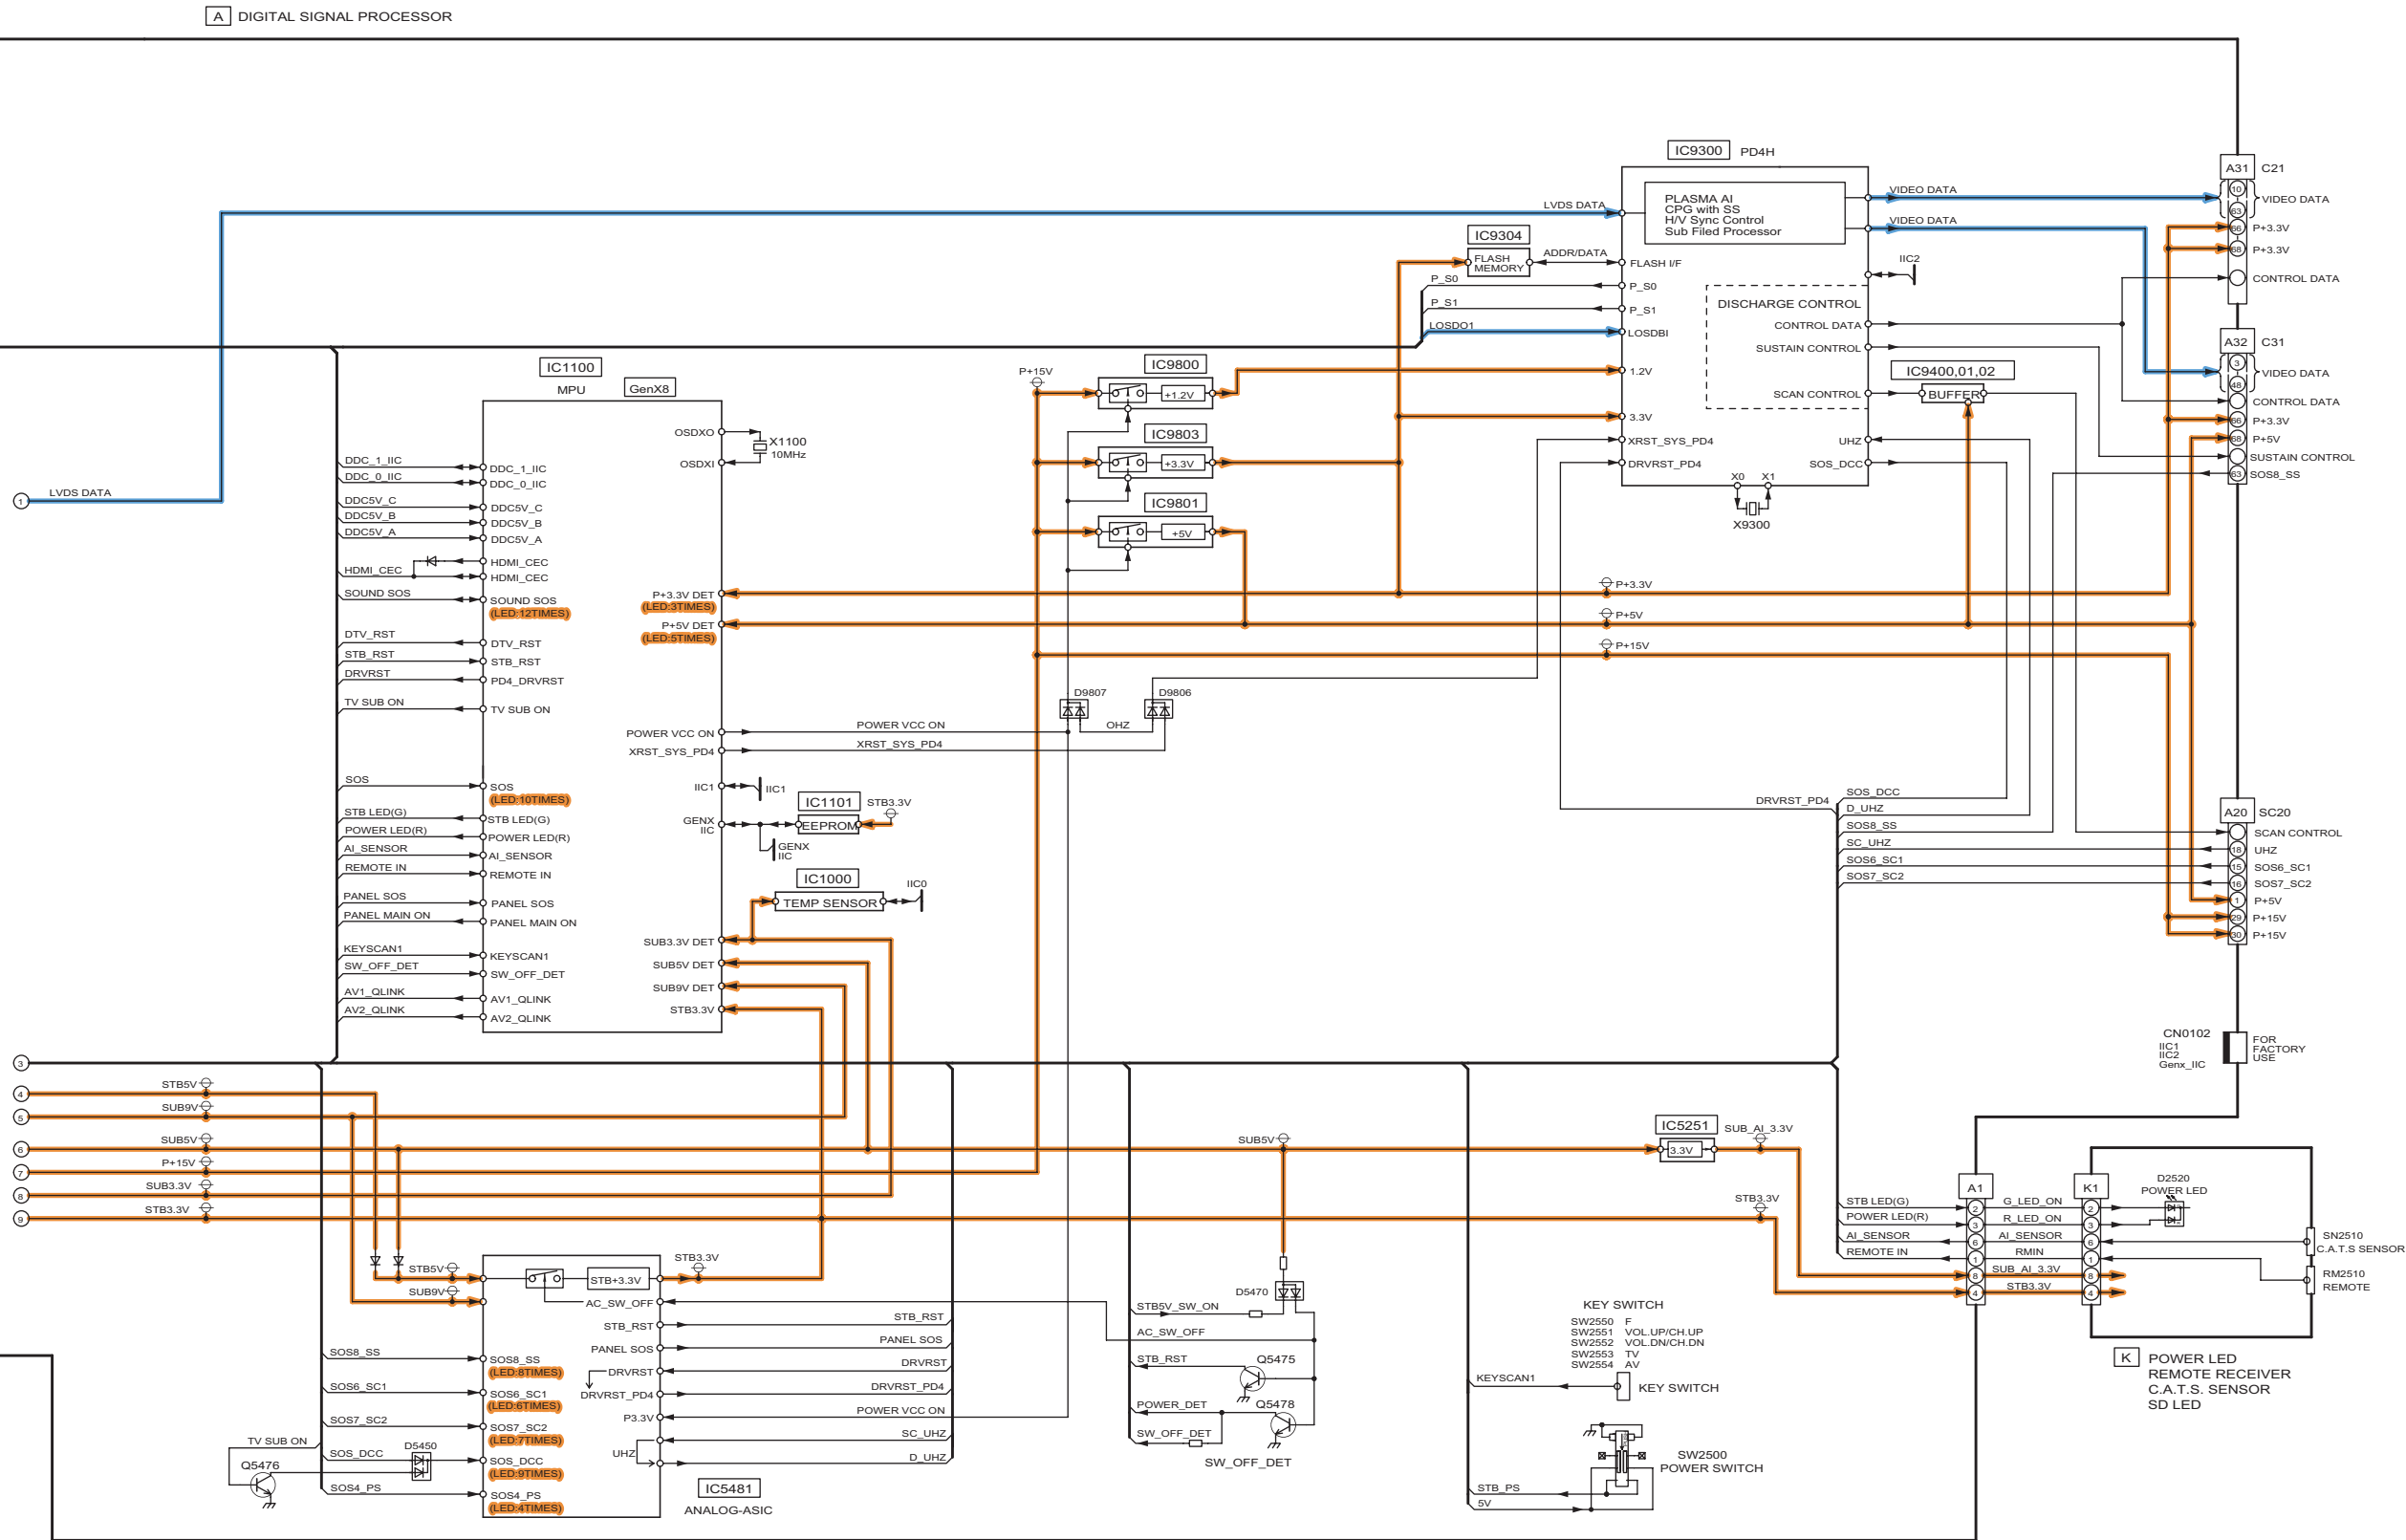


11.4. Block (3/5) Diagram

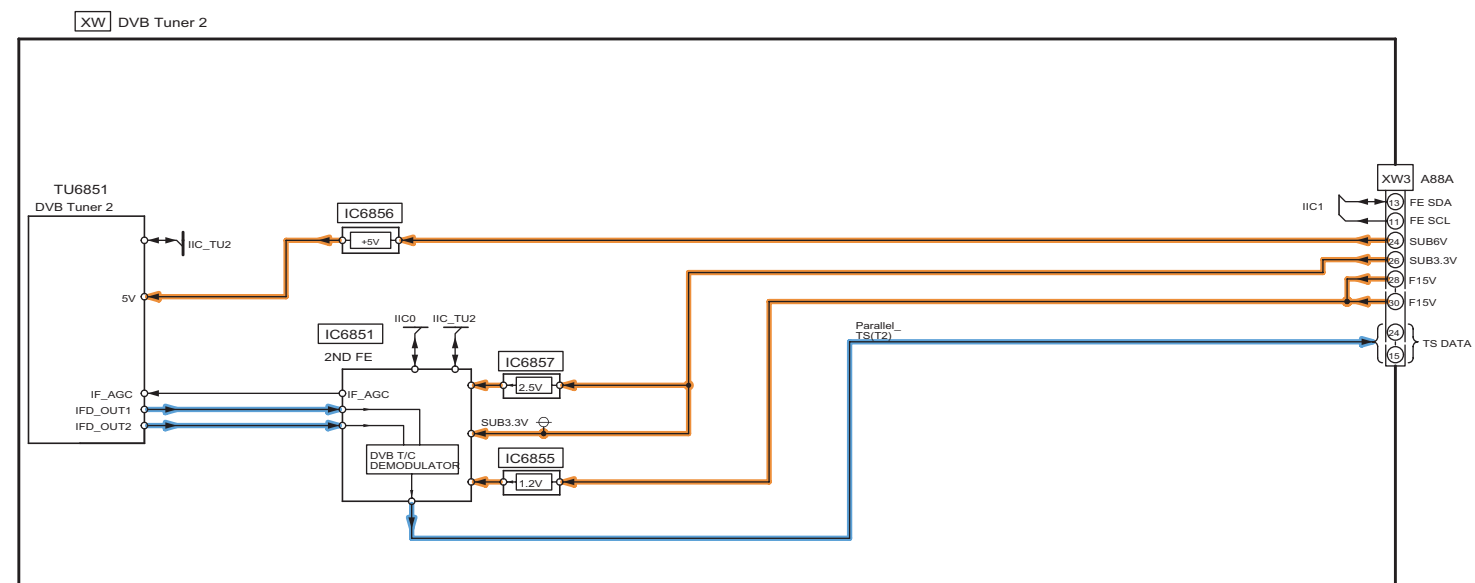

11.5. Block (4/5) Diagram

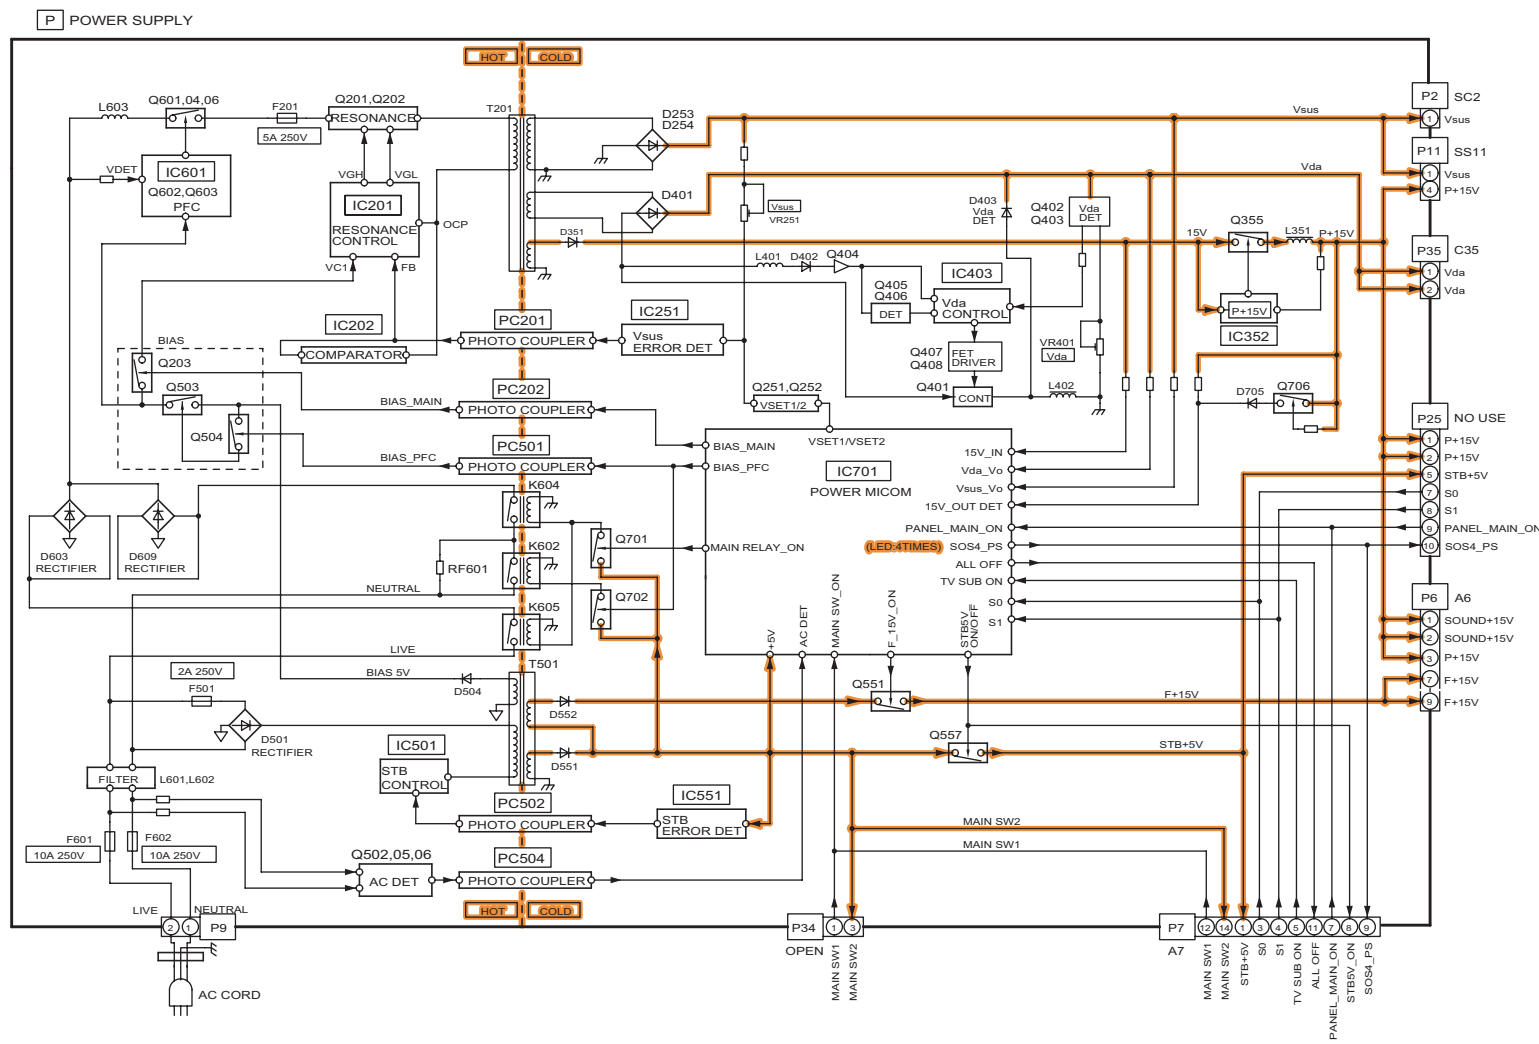

11.6. Block (5/5) Diagram

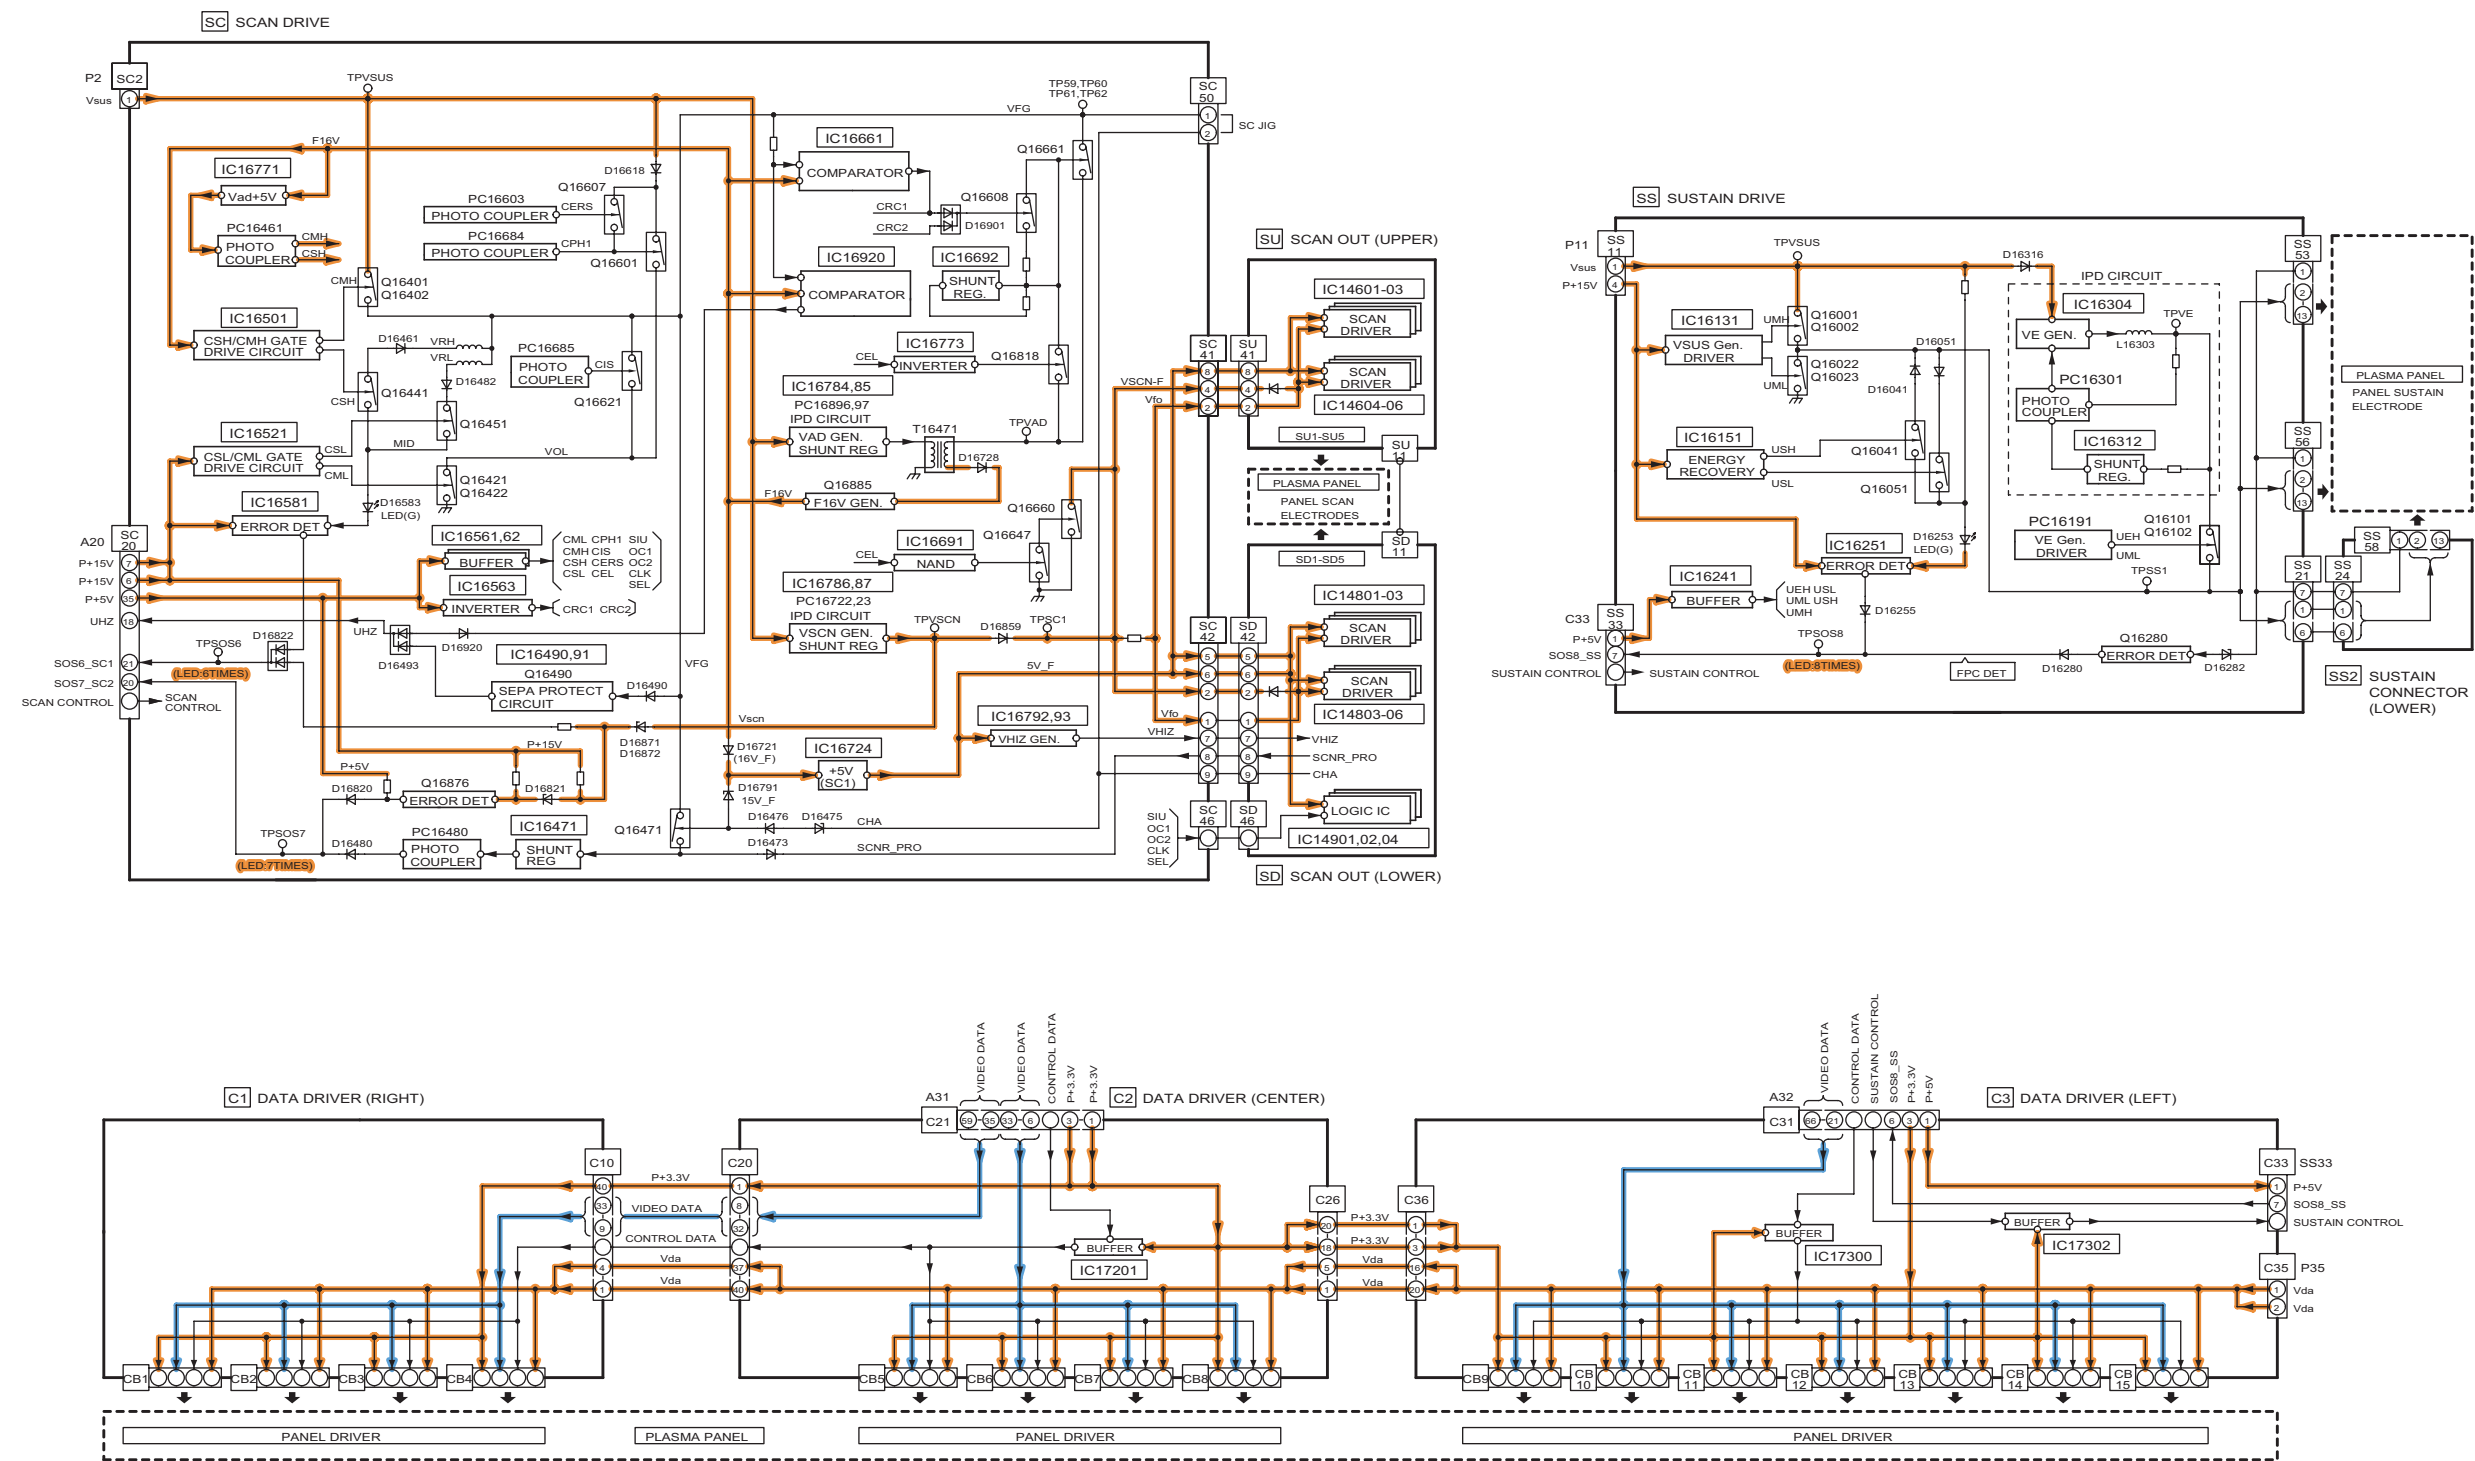


12 Wiring Connection Diagram


12.1. Caution statement.

Caution:
Please confirm that all flexible cables are assembled correctly.
Also make sure that they are locked in the connectors.
Verify by giving the flexible cables a very slight pull.


12.2. Wiring (1)

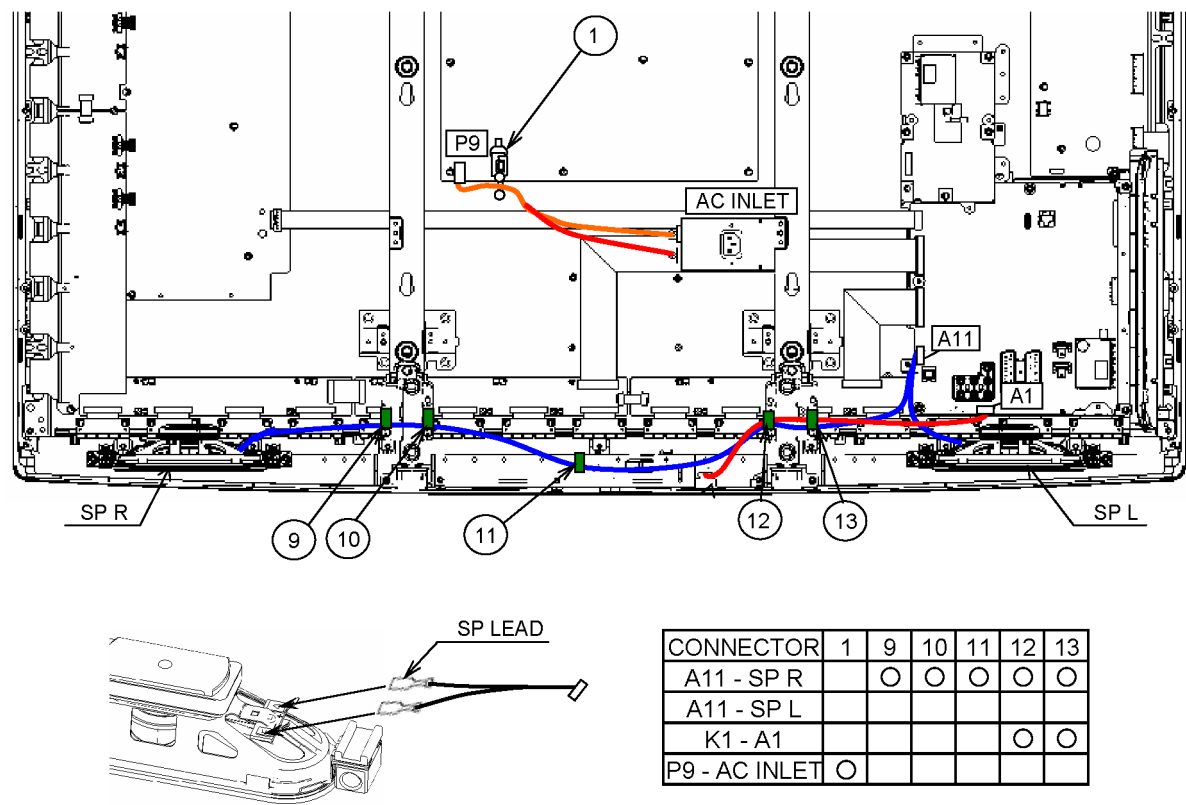


12.3. Wiring (2)

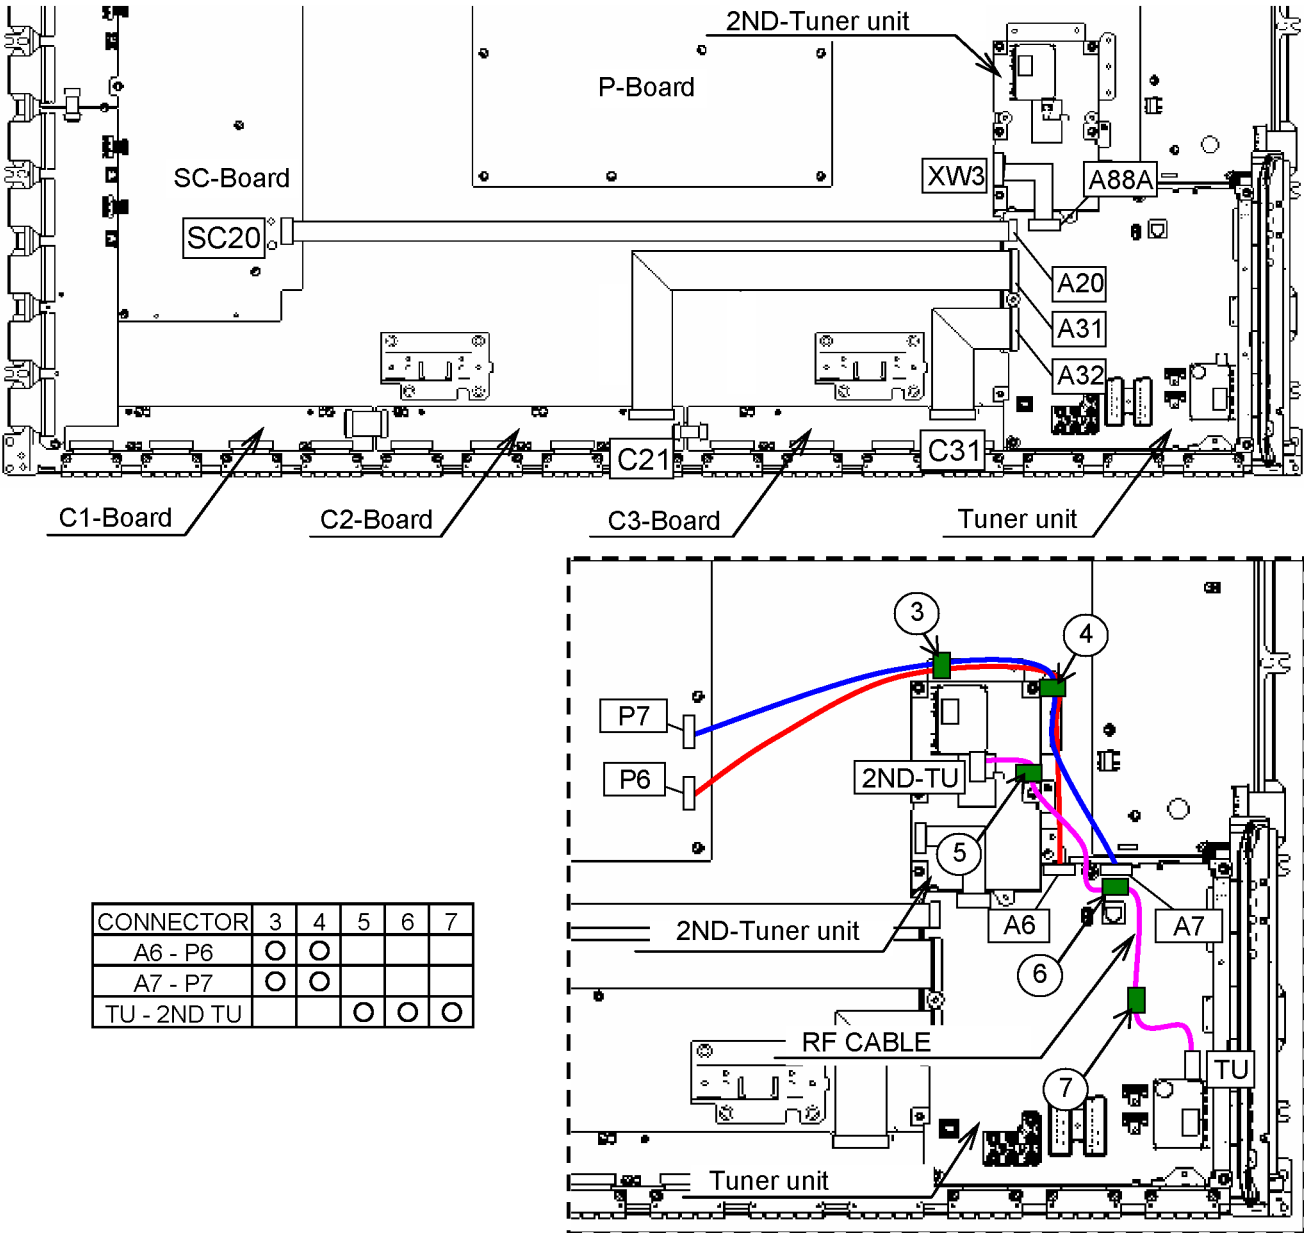

12.4. Wiring (3)

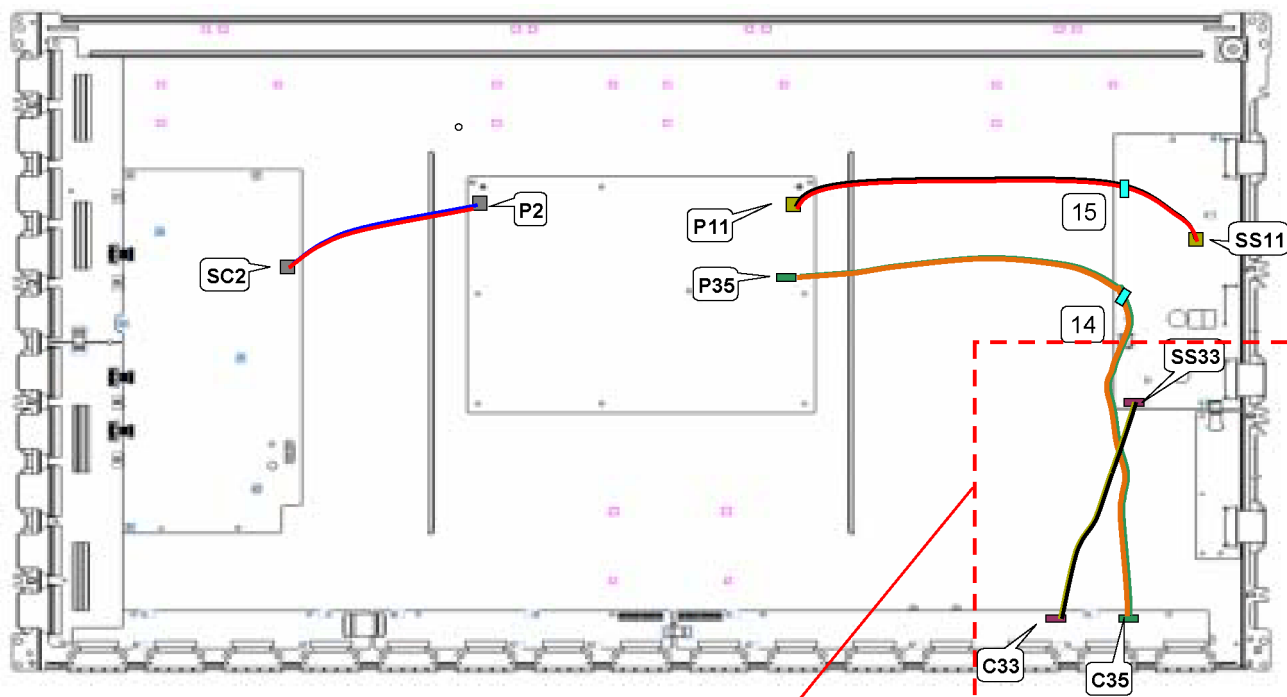

CONNECTOR	14	15
C33 - SS33		
P35 - C35	○	
P11 - SS11		○
SC2 - P2		

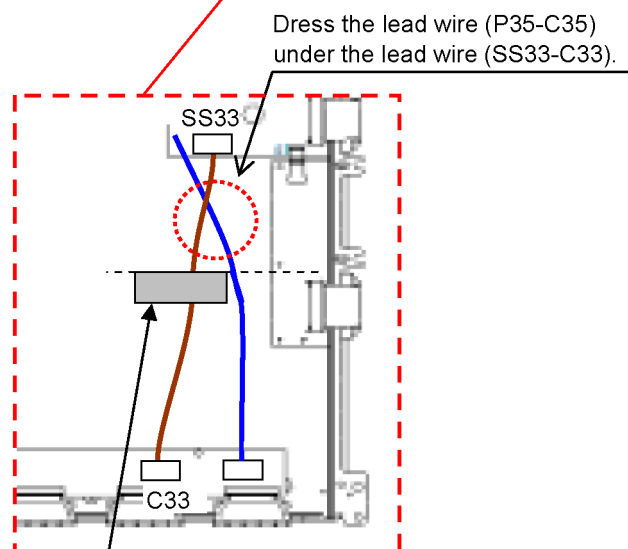







FELT TAPE

Fix the lead wire (SS33-C33) only to the PDP panel by FELT TAPE at the center of wire or the same line of a hole of SS2 board.
Reason: To avoid a contact with A-board fixing metal.

13 Schematic Diagram

13.1. Schematic Diagram Note


Notes:

- 1. **Resistor**
Unit of resistance is OHM [Ω] (K=1,000, M=1,000,000).
- 2. **Capacitor**
Unit of capacitance is μ F, unless otherwise noted.
- 3. Coil
Unit of inductance is H, unless otherwise noted.
- 4. Test Point
 : Test Point position
- 5. Earth Symbol
 : Chassis Earth (Cold)  : Line Earth (Hot)
- 6. Voltage Measurement
Voltage is measured by a DC voltmeter.
Conditions of the measurement are the following:
Power Source AC220-240V, 50/60Hz
Receiving Signal Colour Bar signal (RF)
All customer's controls Maximum positions
- 7. When arrow mark () is found, connection is easily found from the direction of arrow.
- 8. Indicates the major signal flow. : Video  Audio 
- 9. This schematic diagram is the latest at the time of printing and subject to change without notice.


Remarks:

- 1. The Power Circuit contains a circuit area which uses a separate power supply to isolate the earth connection.
The circuit is defined by HOT and COLD indications in the schematic diagram. Take the following precautions.
All circuits, except the Power Circuit, are cold.
Precautions
 - a. Do not touch the hot part or the hot and cold parts at the same time or you may be shocked.
 - b. Do not short- circuit the hot and cold circuits or a fuse may blow and parts may break.
 - c. Do not connect an instrument, such as an oscilloscope, to the hot and cold circuits simultaneously or a fuse may blow.
Connect the earth of instruments to the earth connection of the circuit being measured.
 - d. Make sure to disconnect the power plug before removing the chassis.


13.2. P-Board (1/3) Schematic Diagram

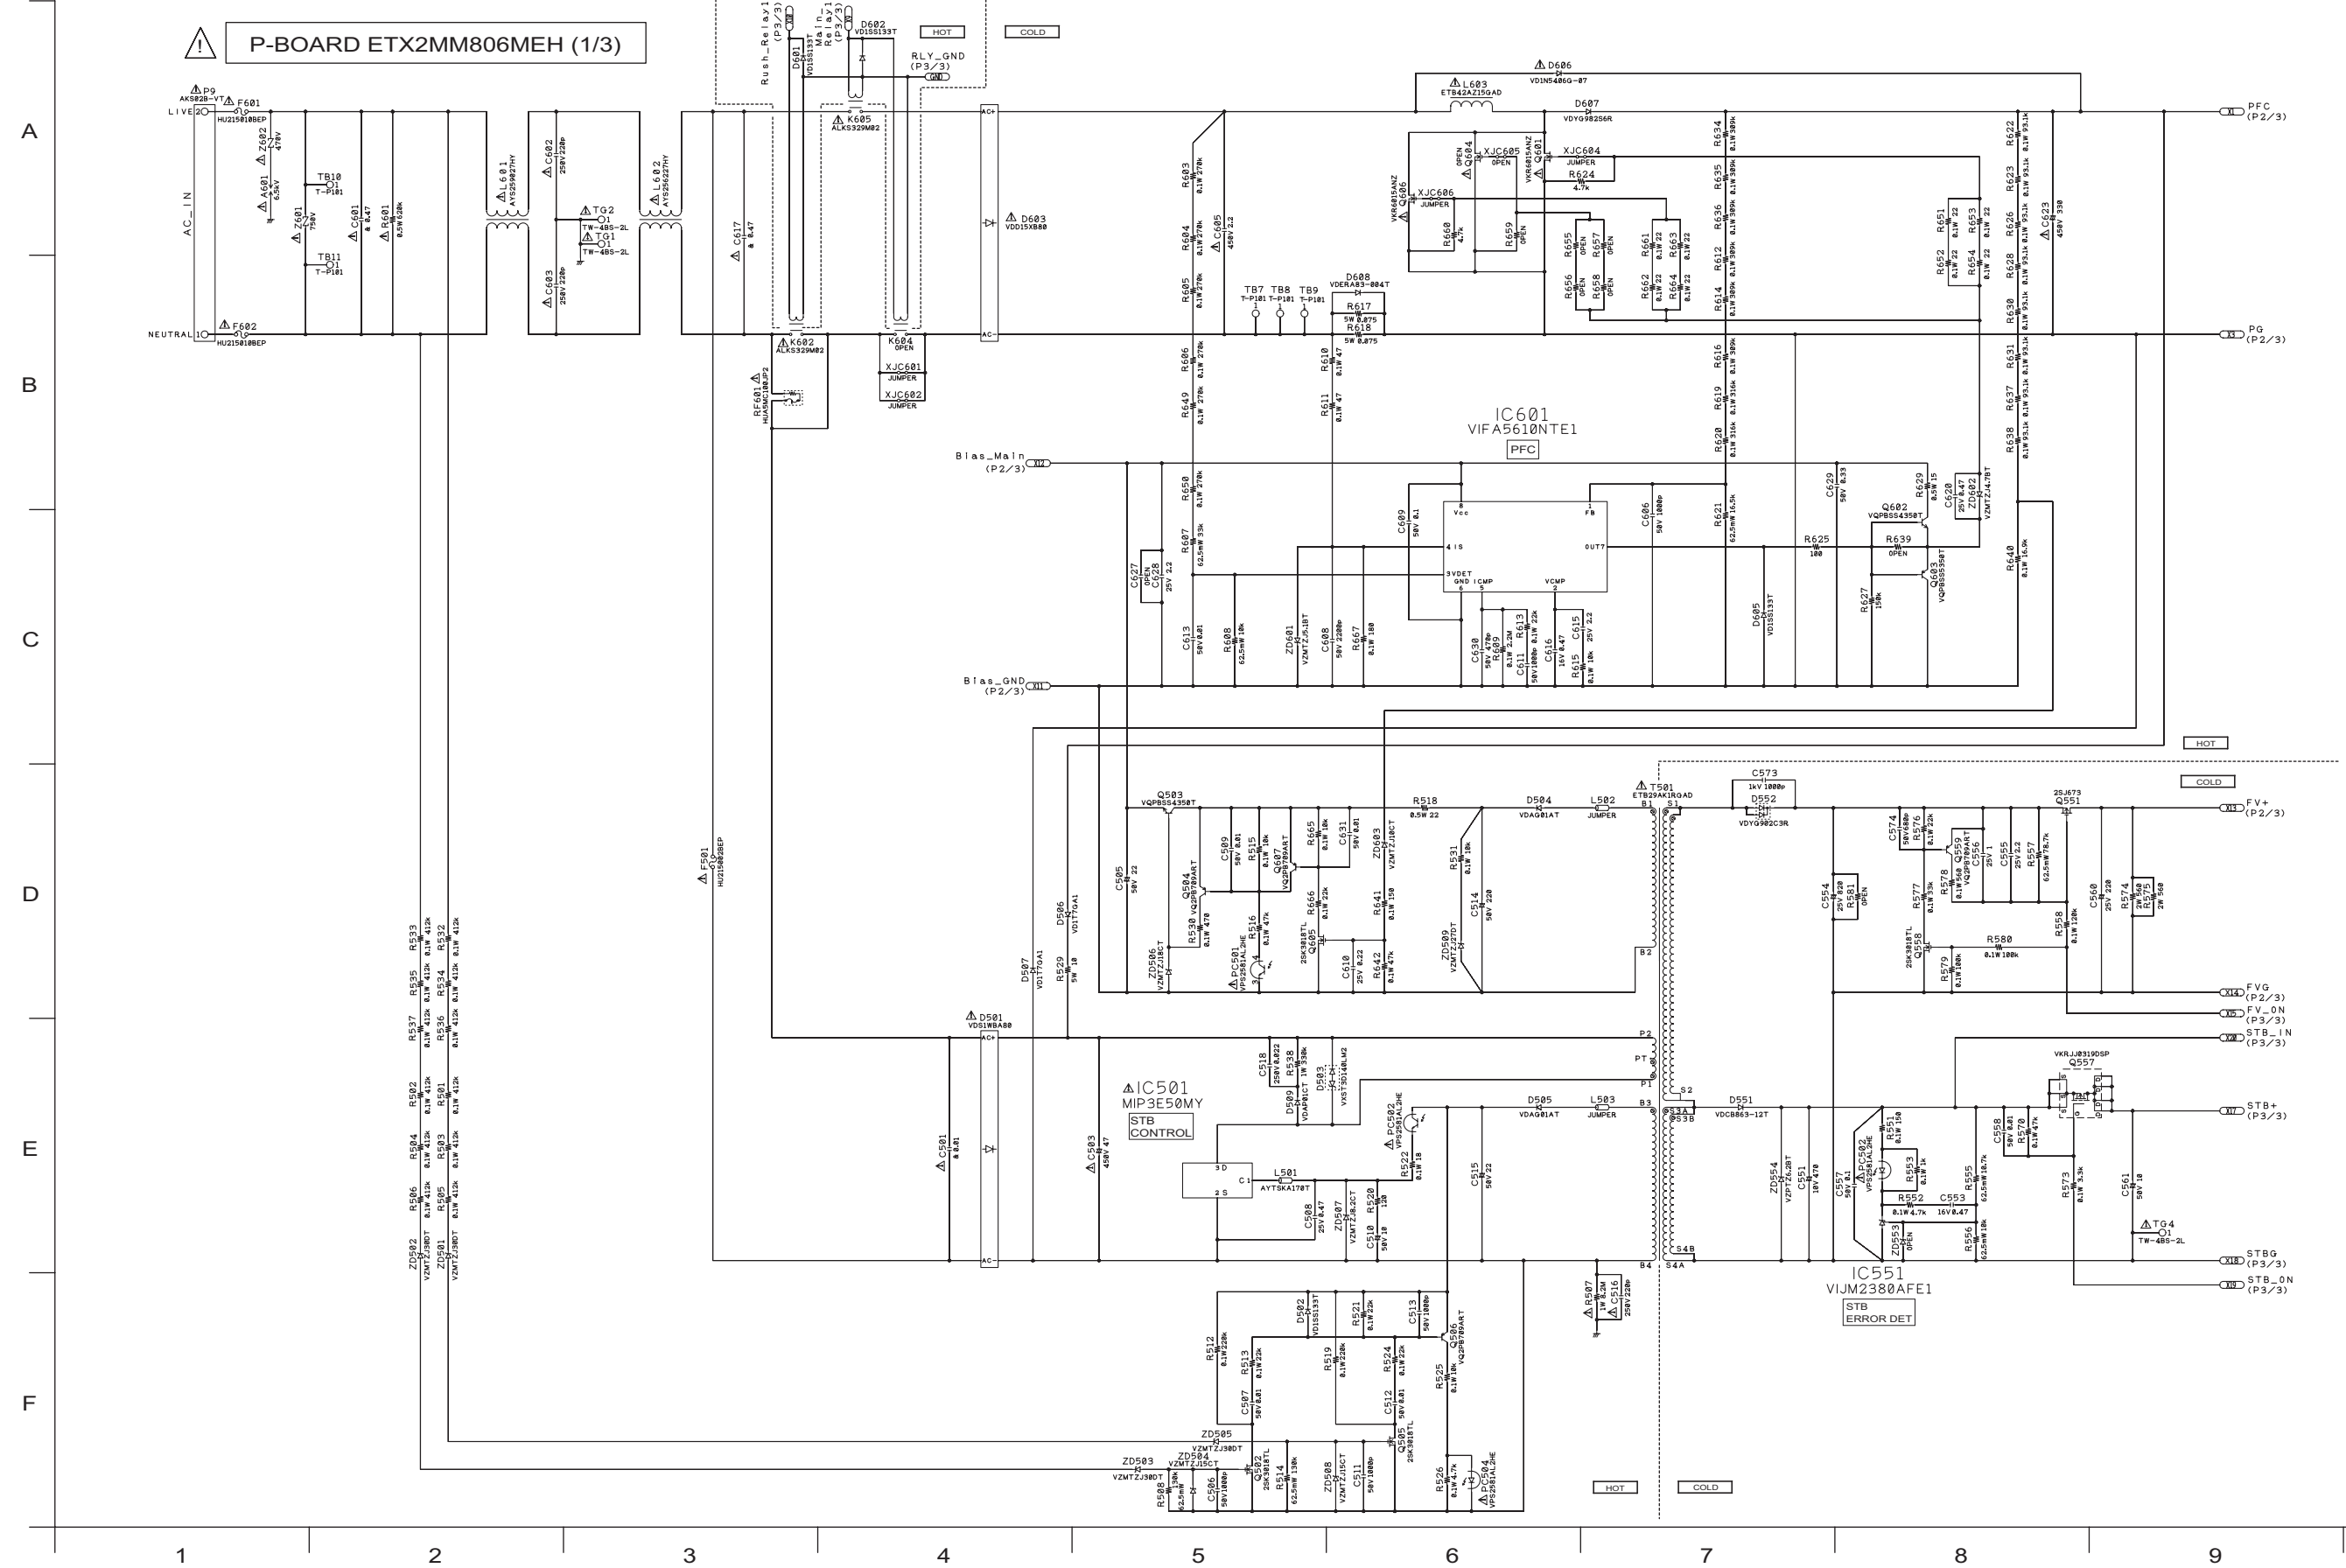


13.3. P-Board (2/3) Schematic Diagram

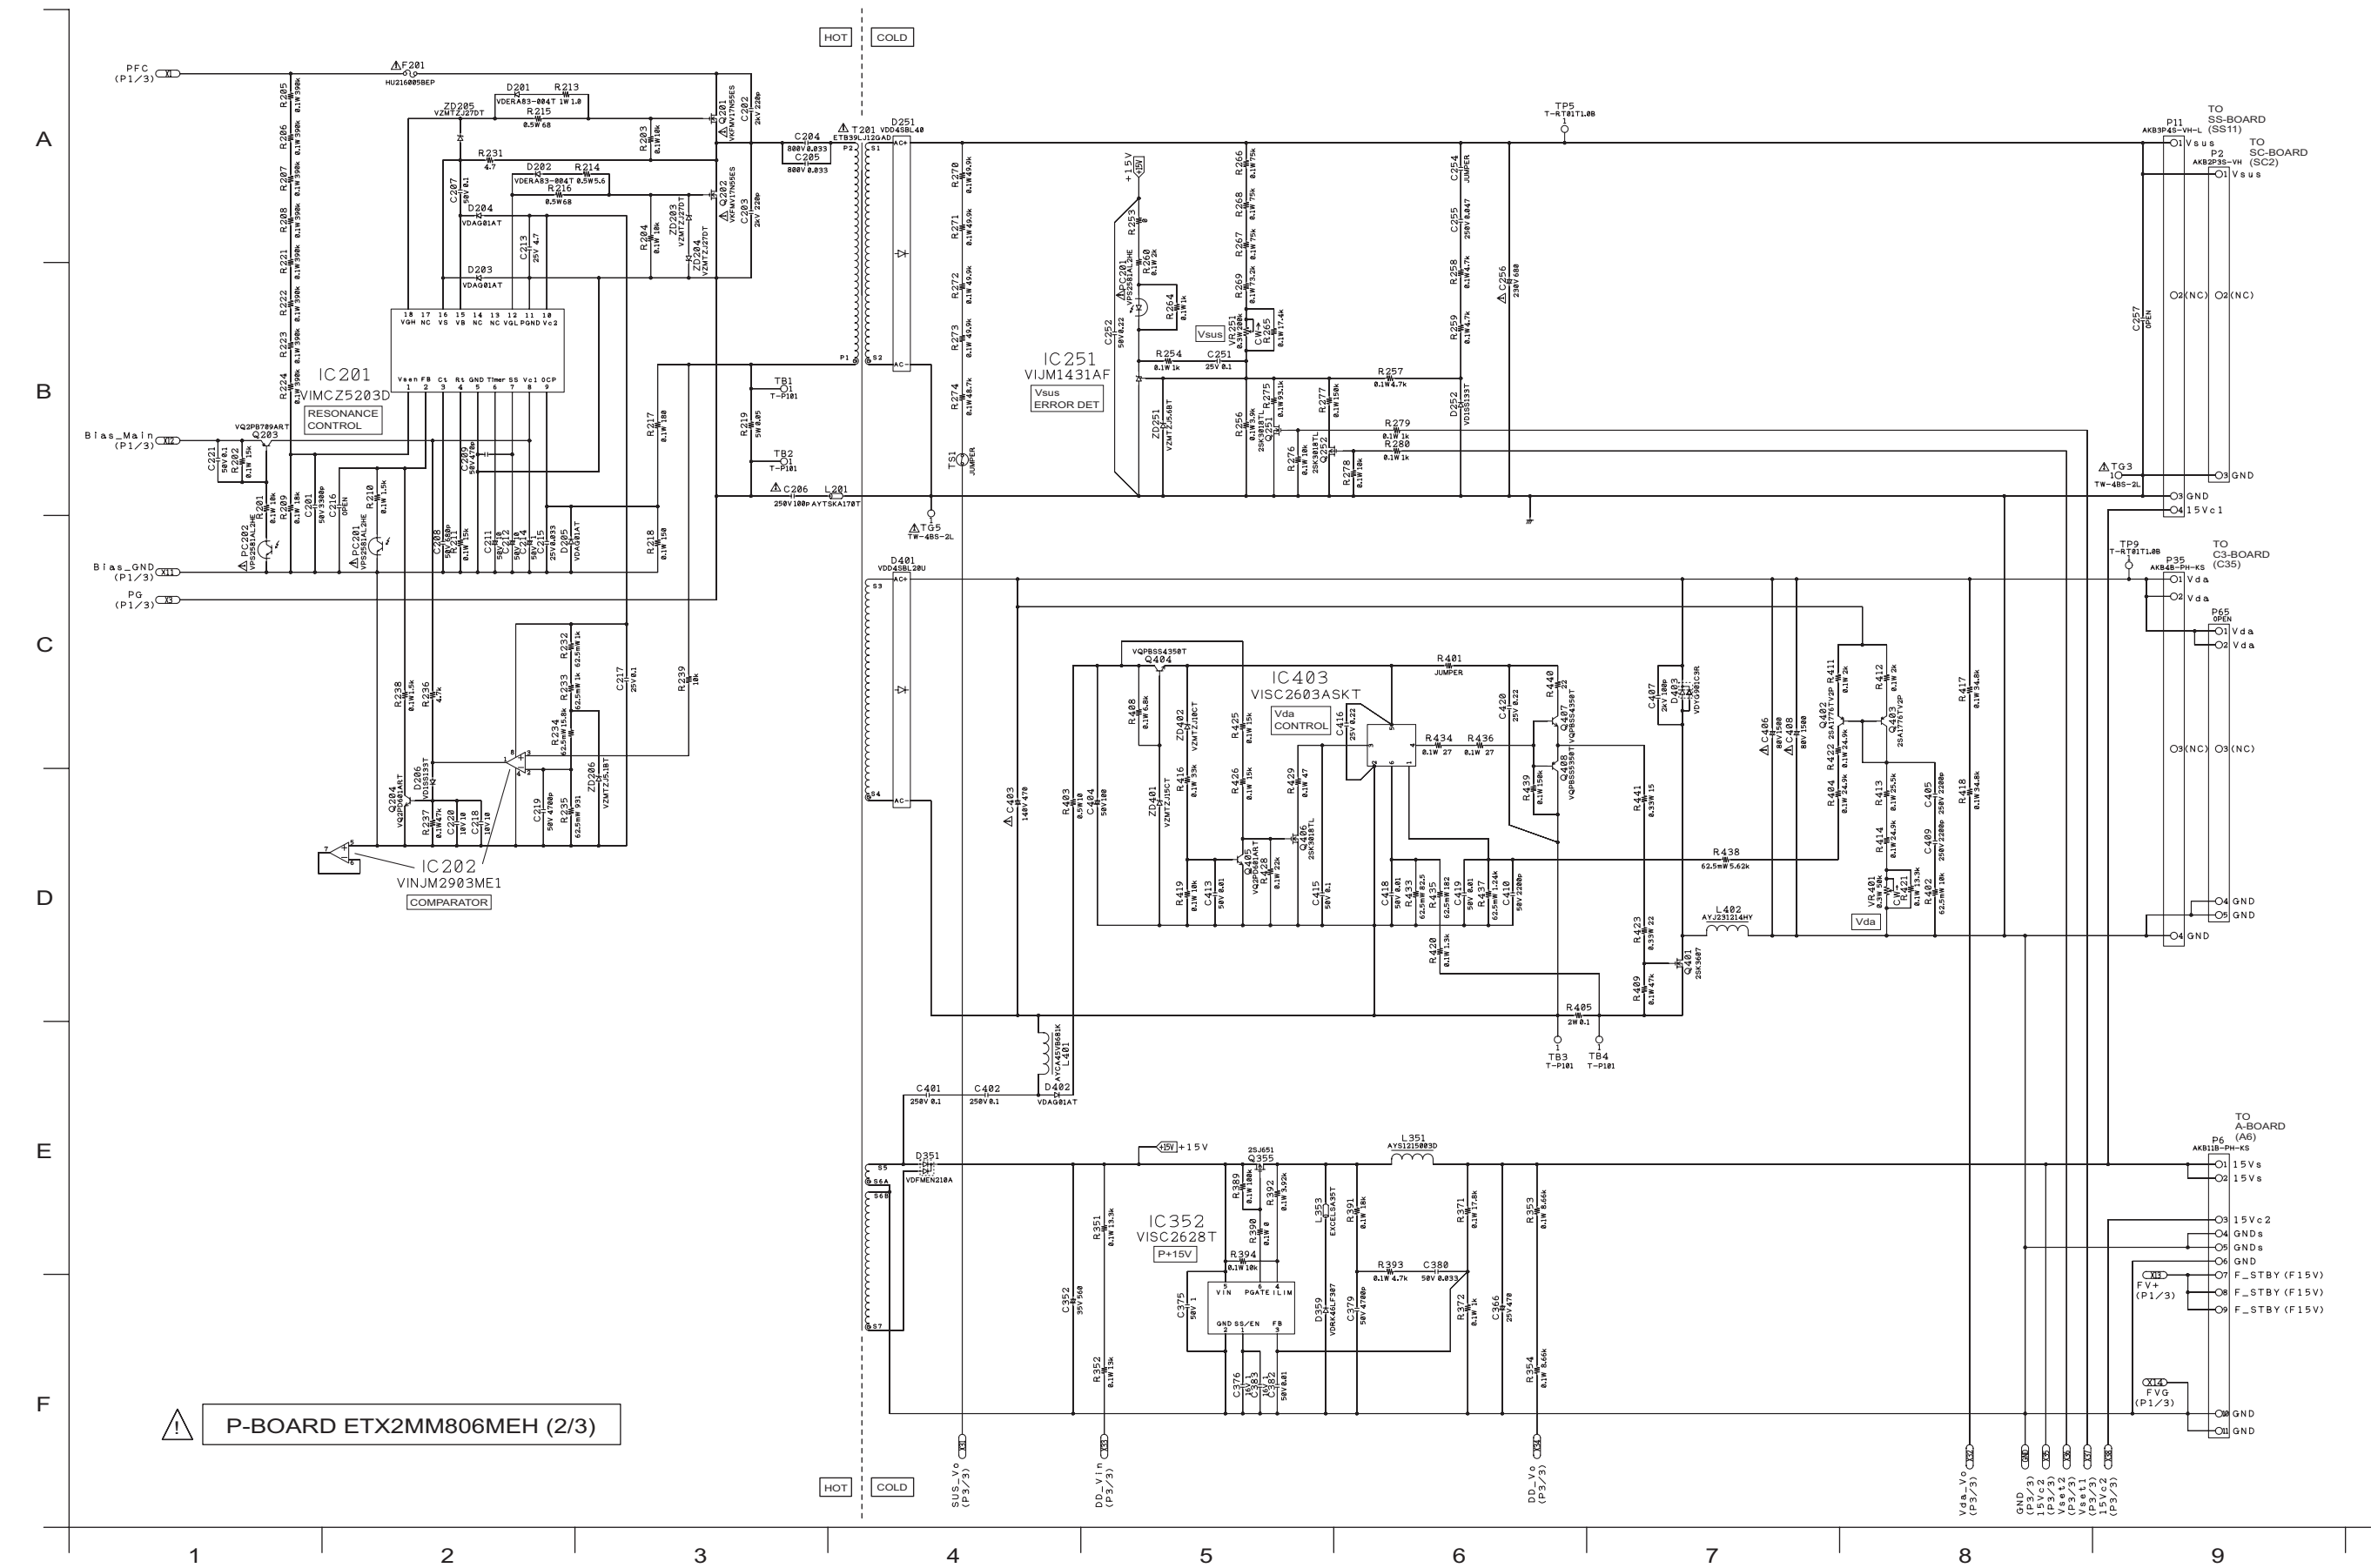


13.4. P-Board (3/3) Schematic Diagram

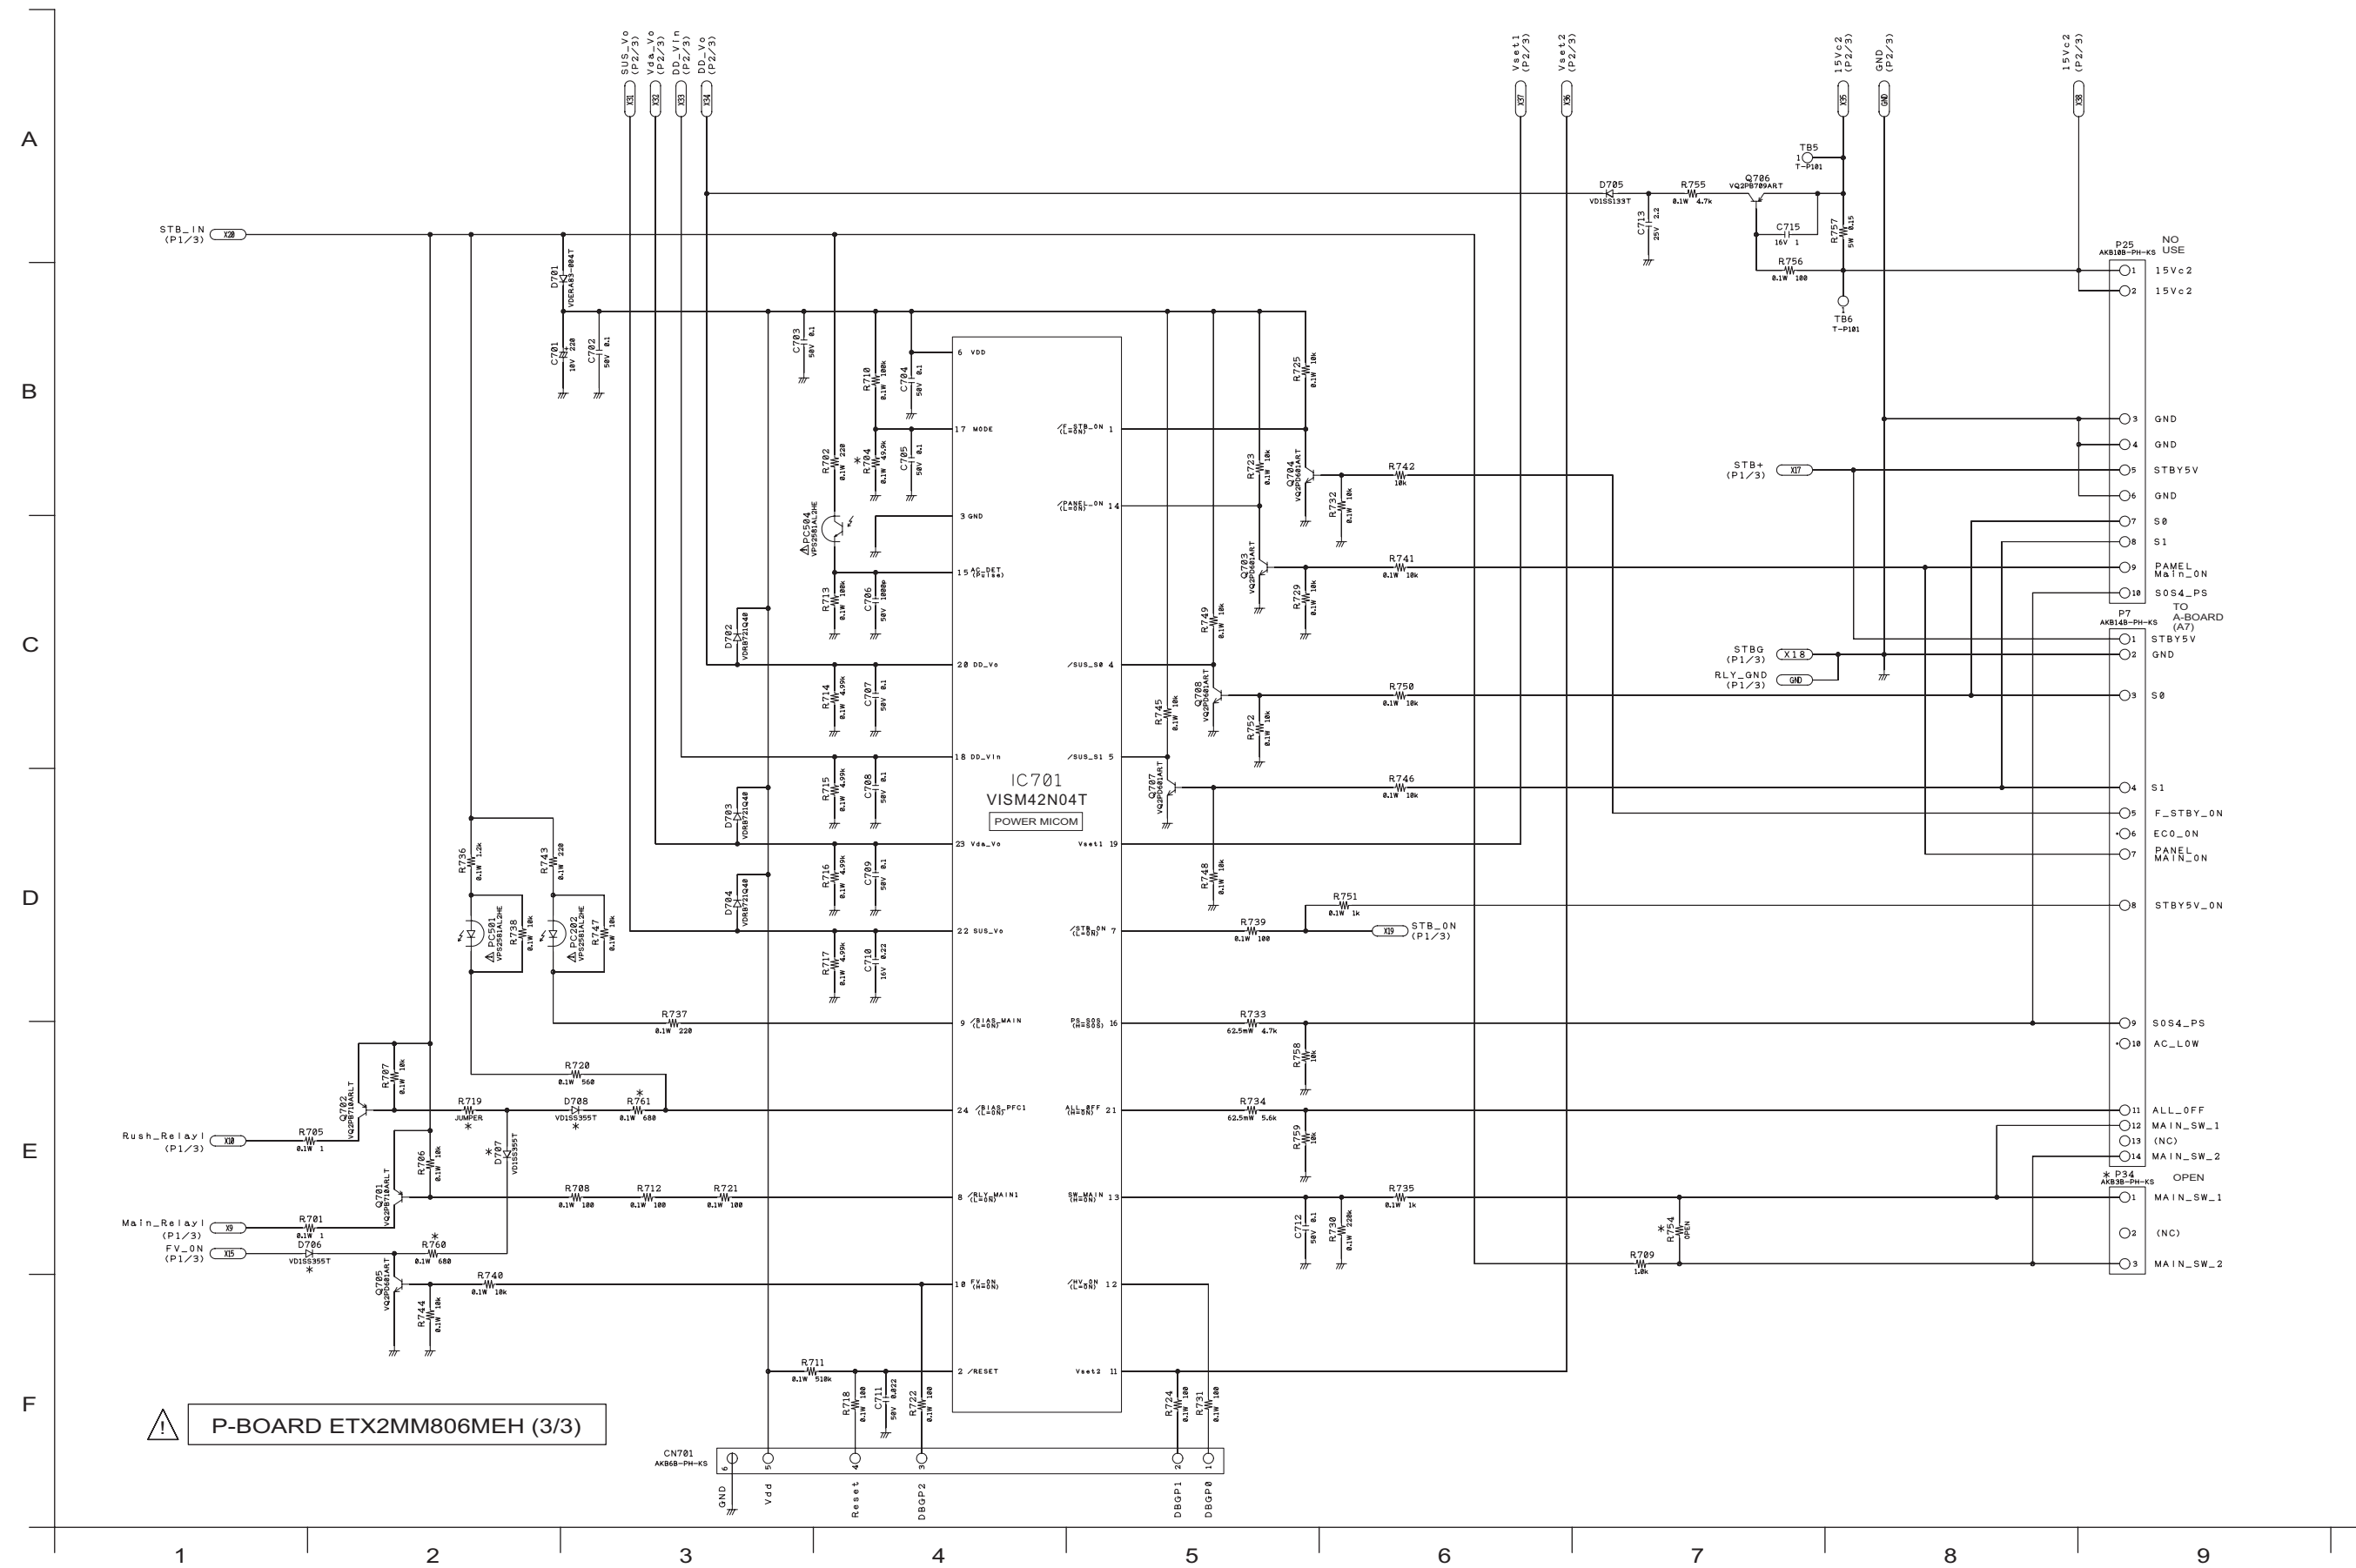


13.5. A-Board (1/22) Schematic Diagram

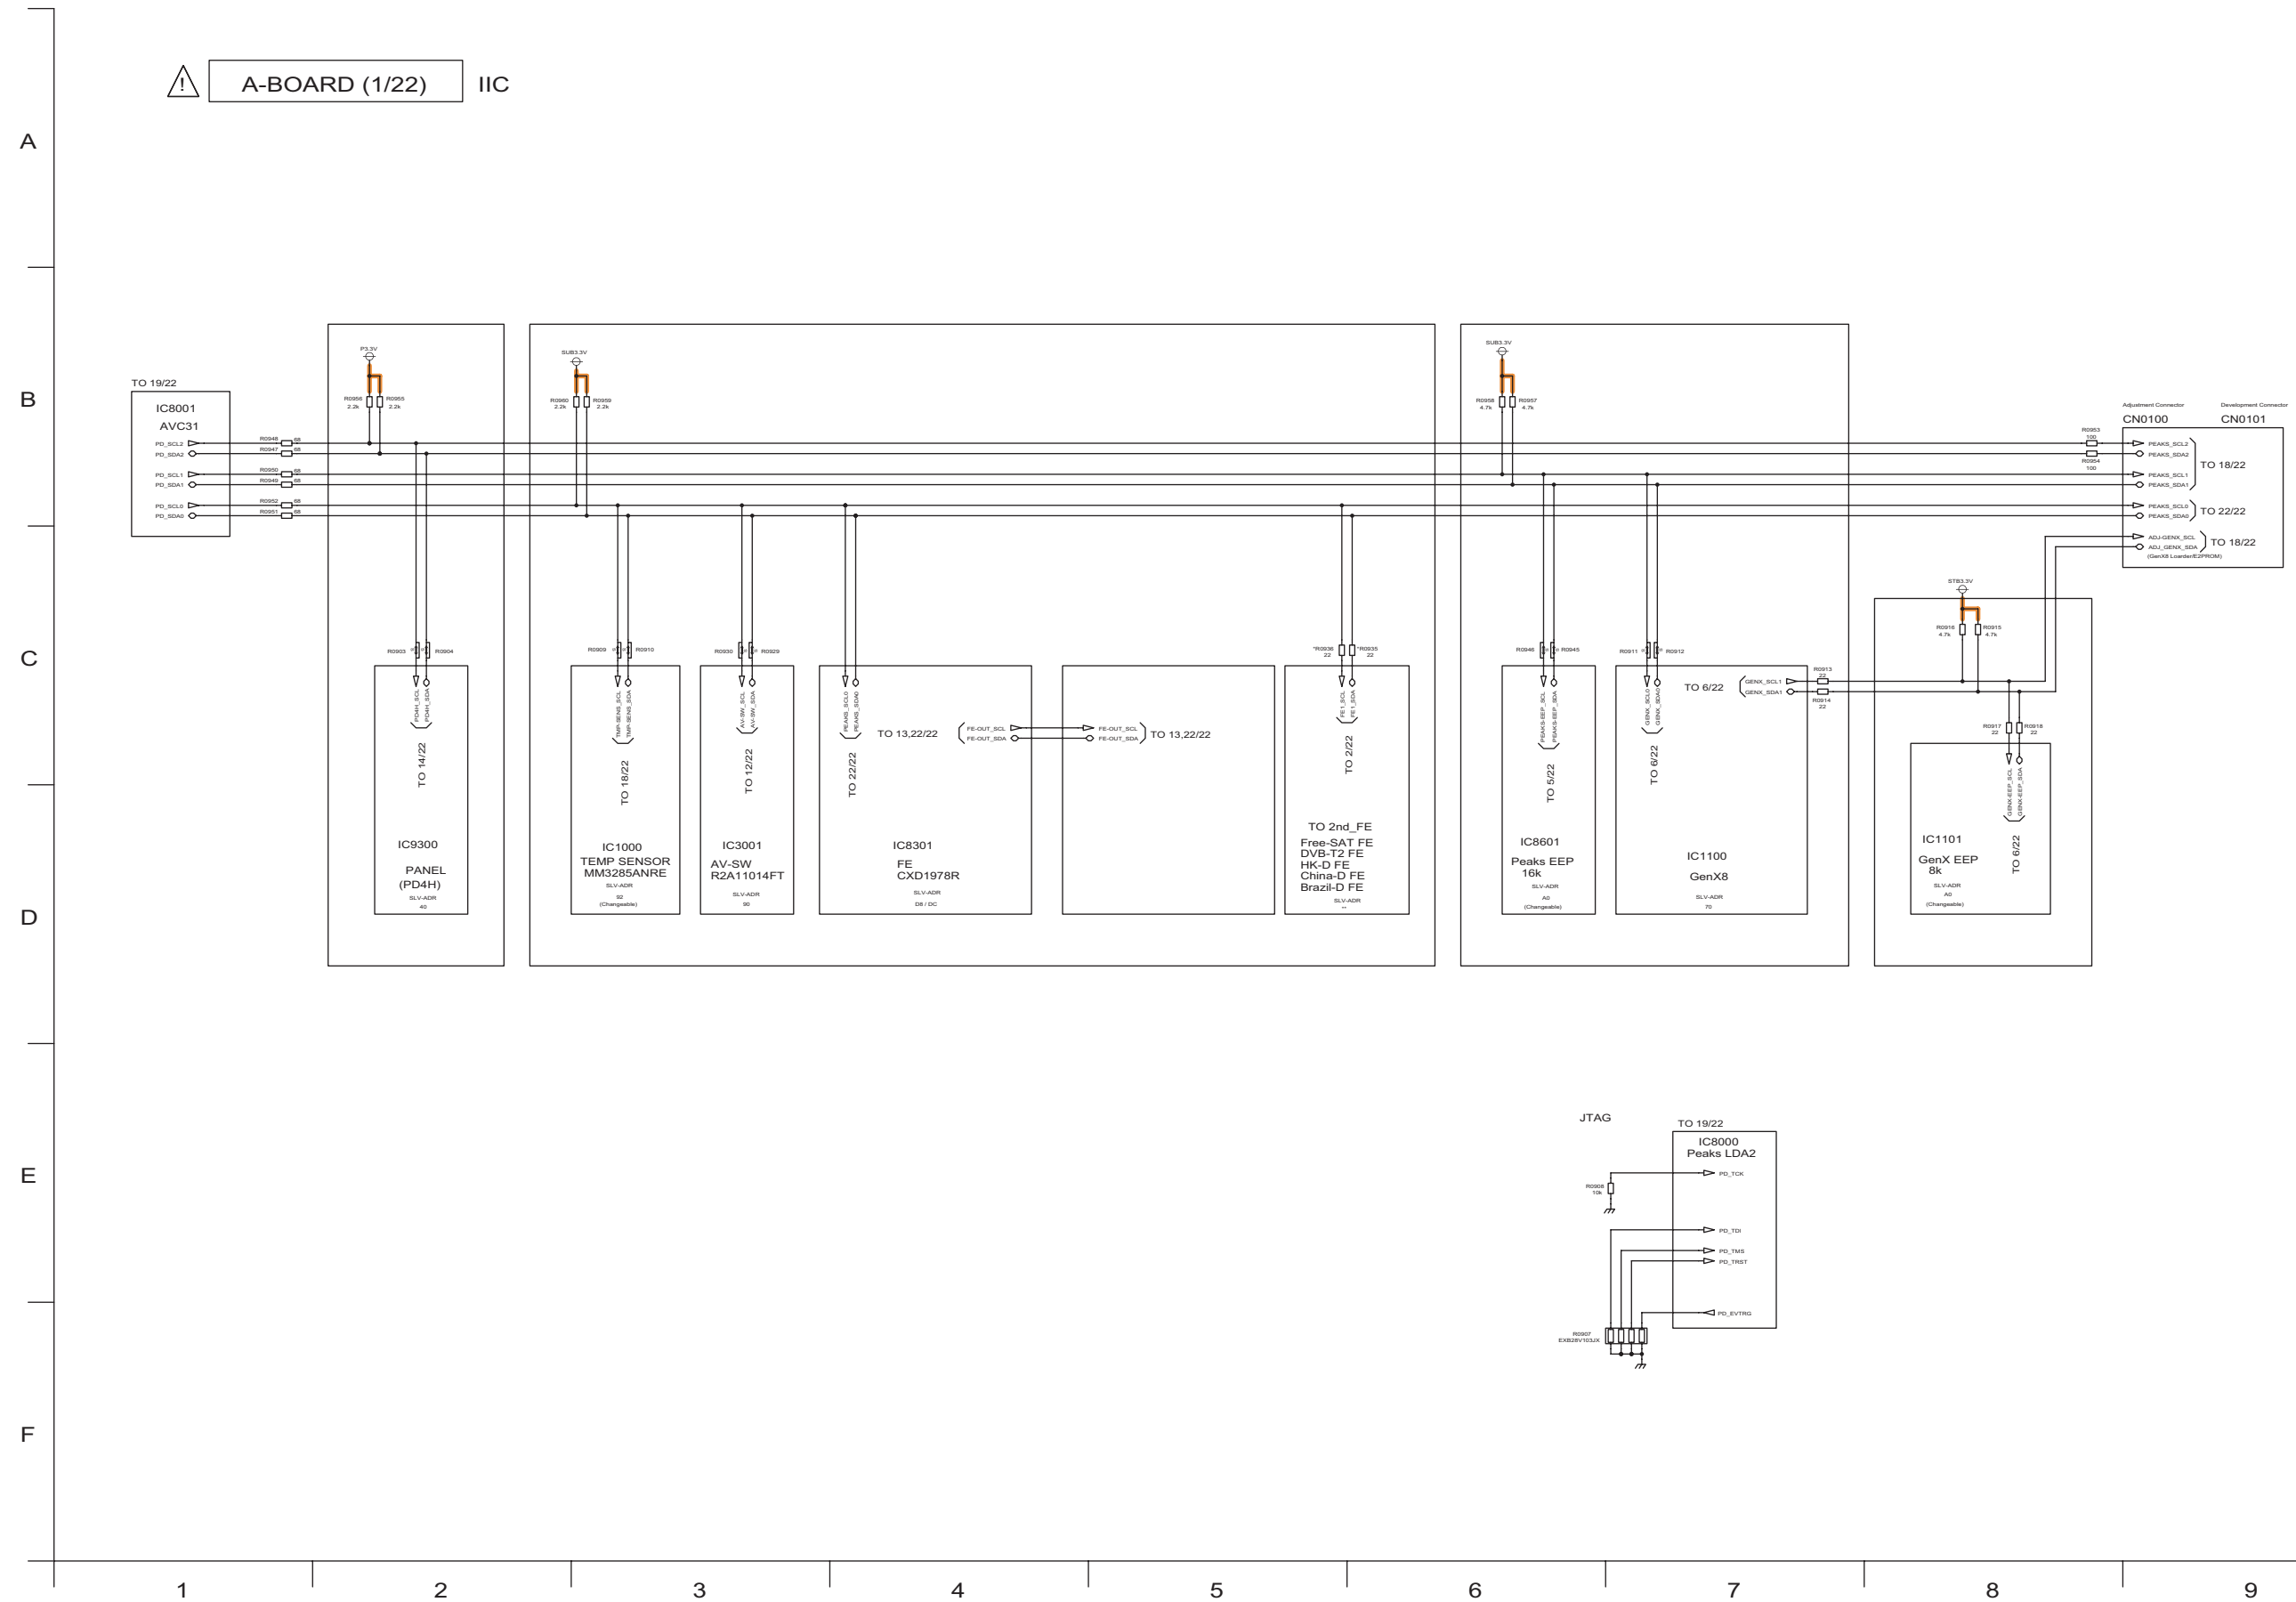


13.6. A-Board (2/22) Schematic Diagram



 A-BOARD (2/22) Peaks-DEST

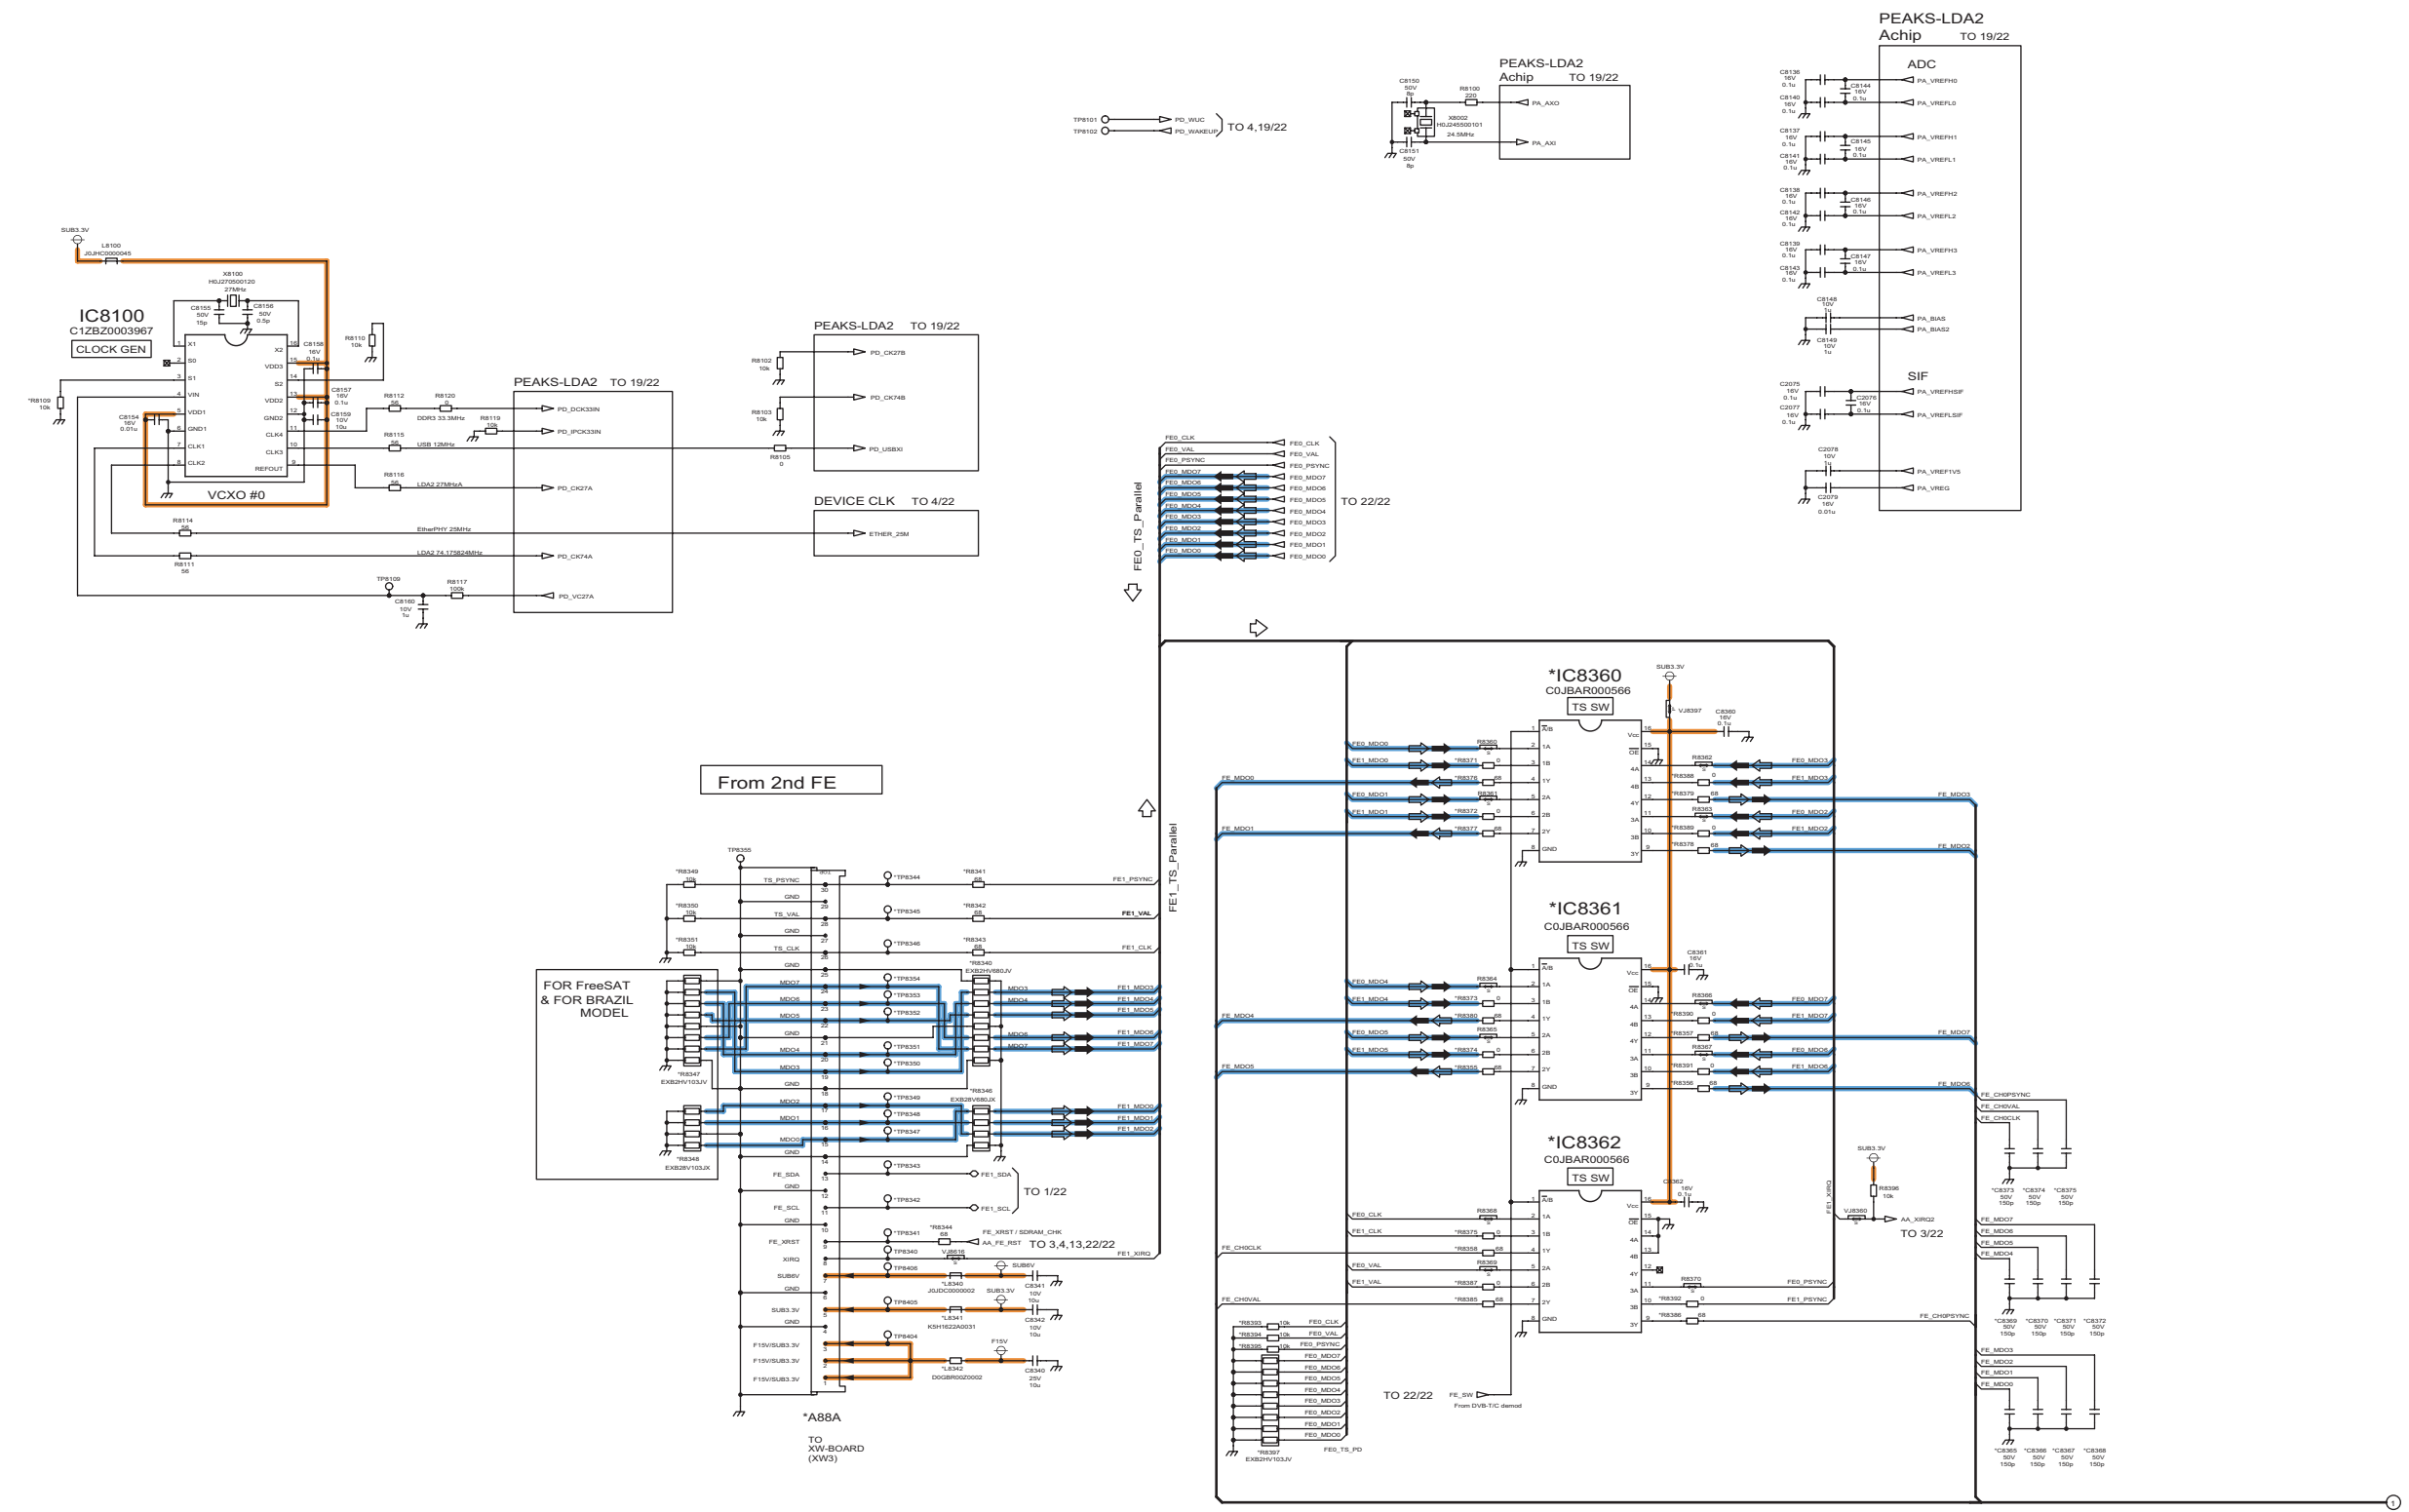

13.7. A-Board (3/22) Schematic Diagram

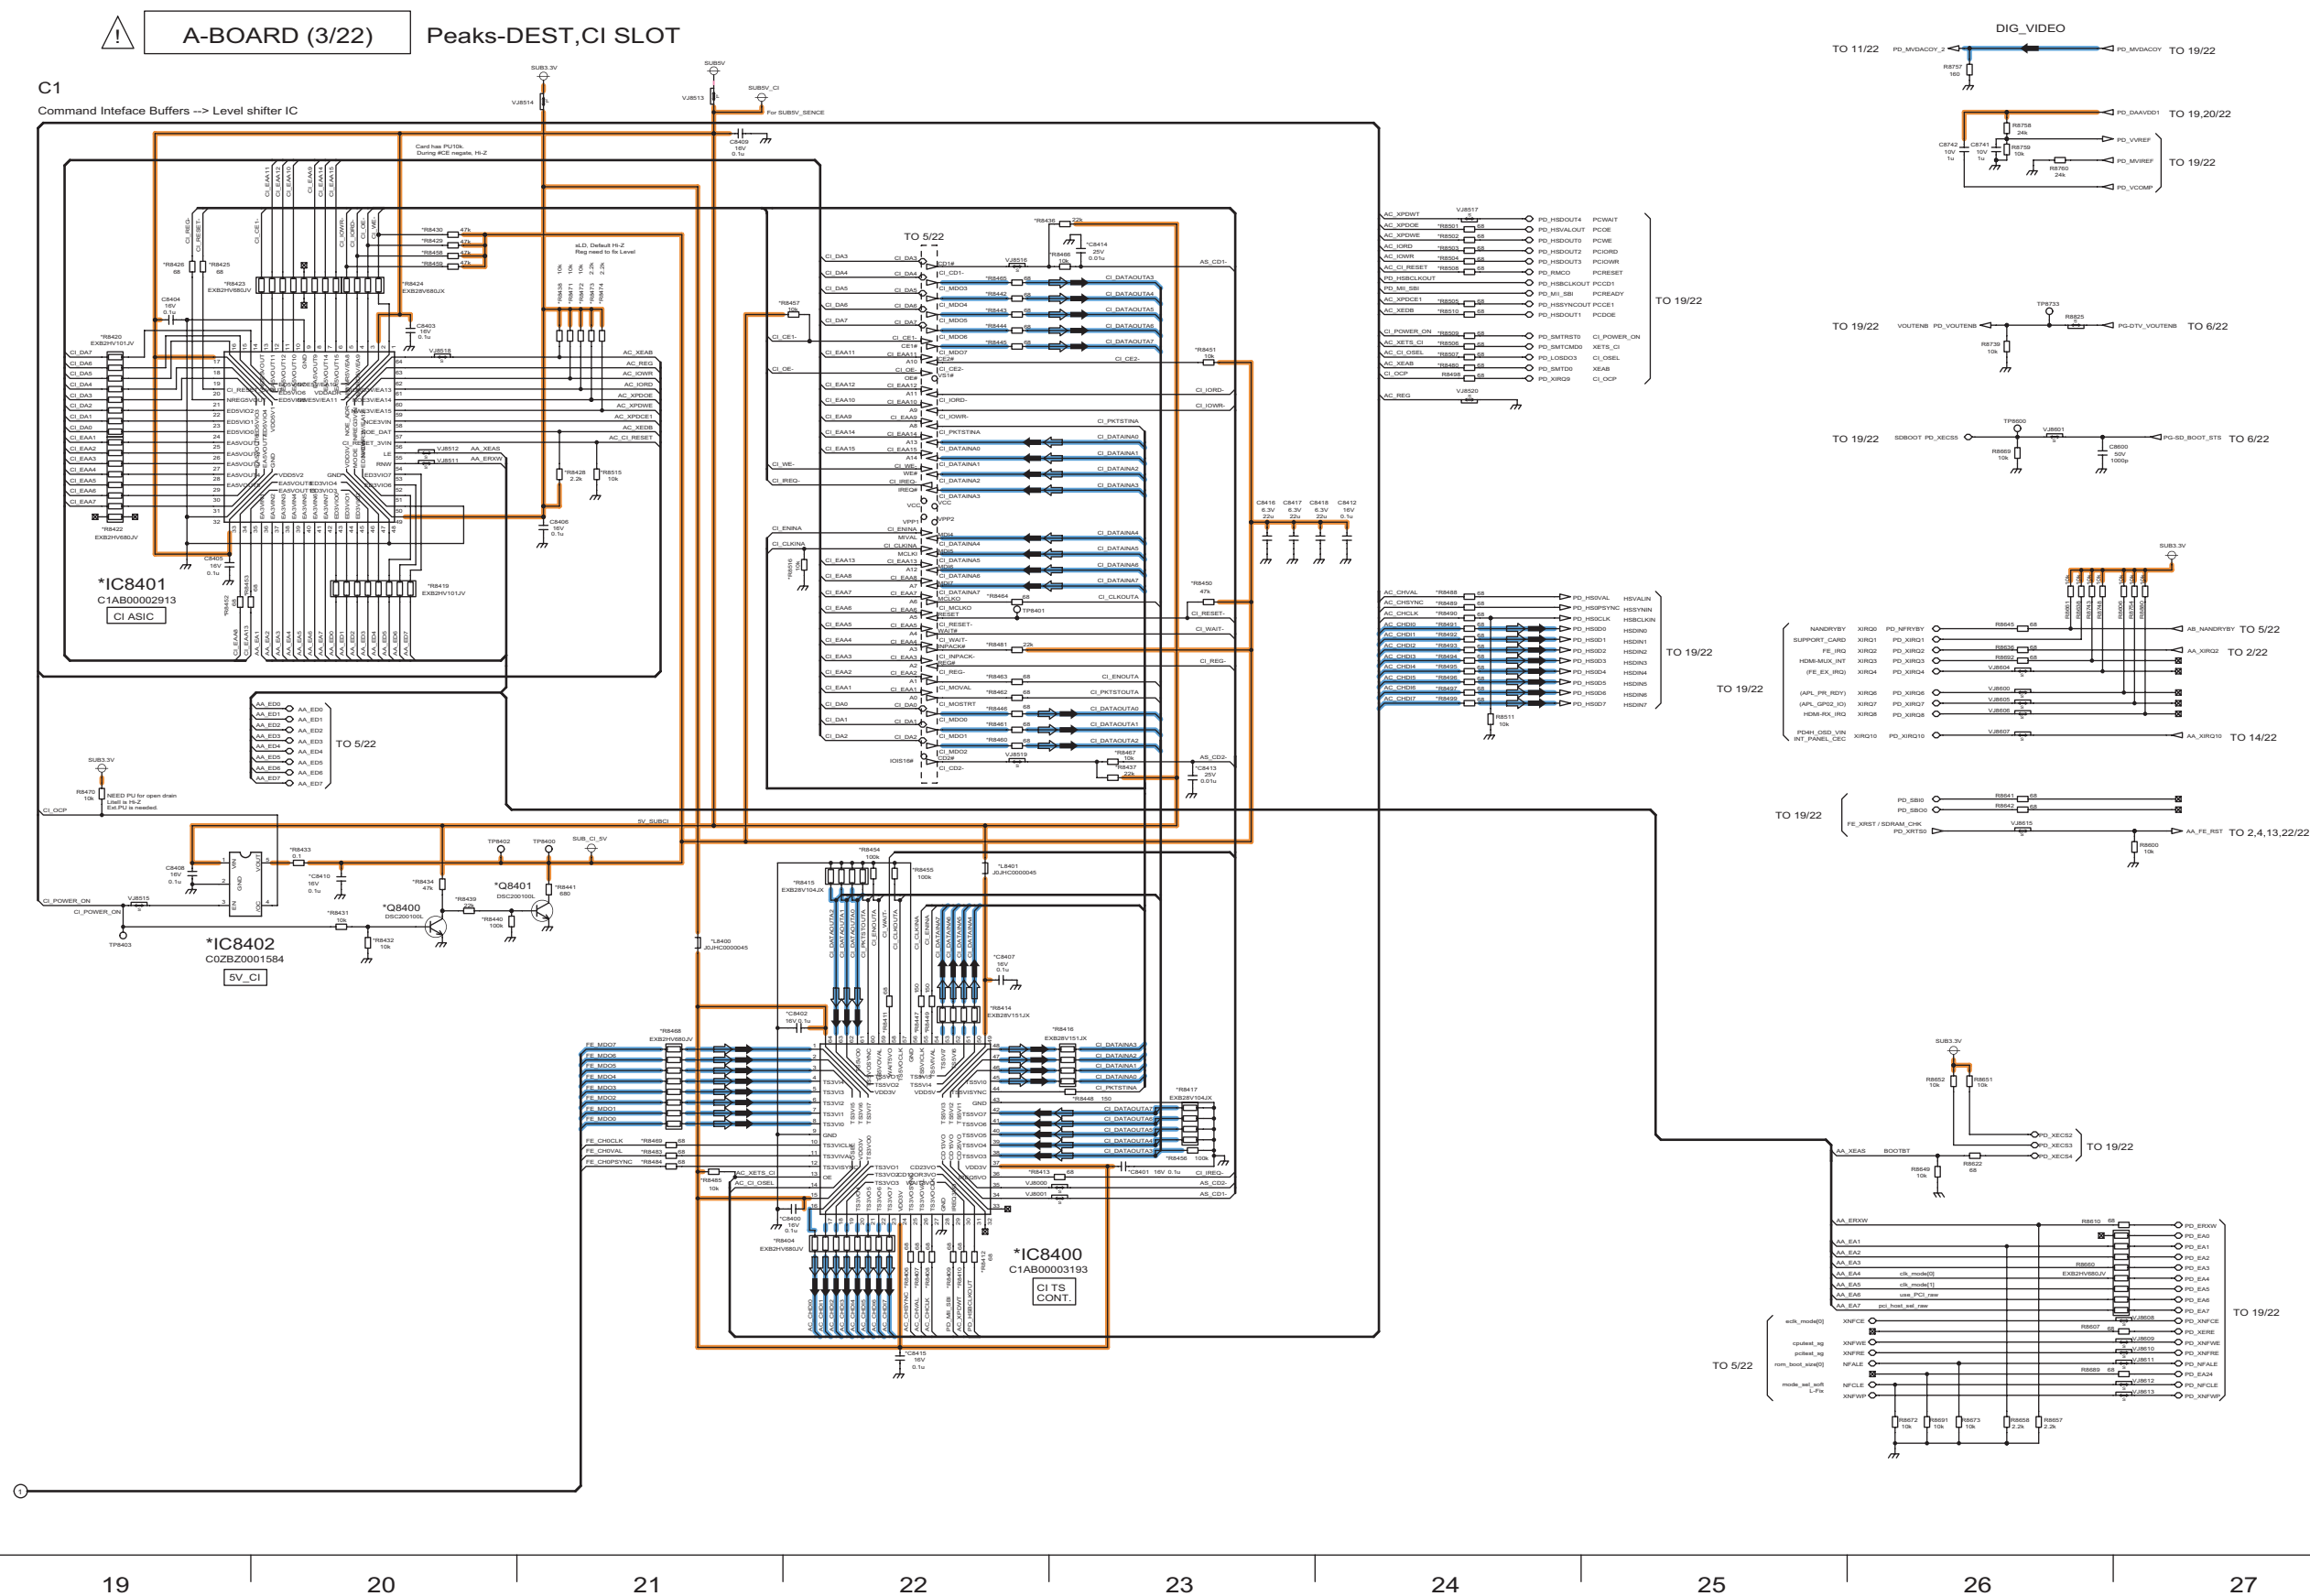

13.8. A-Board (4/22) Schematic Diagram




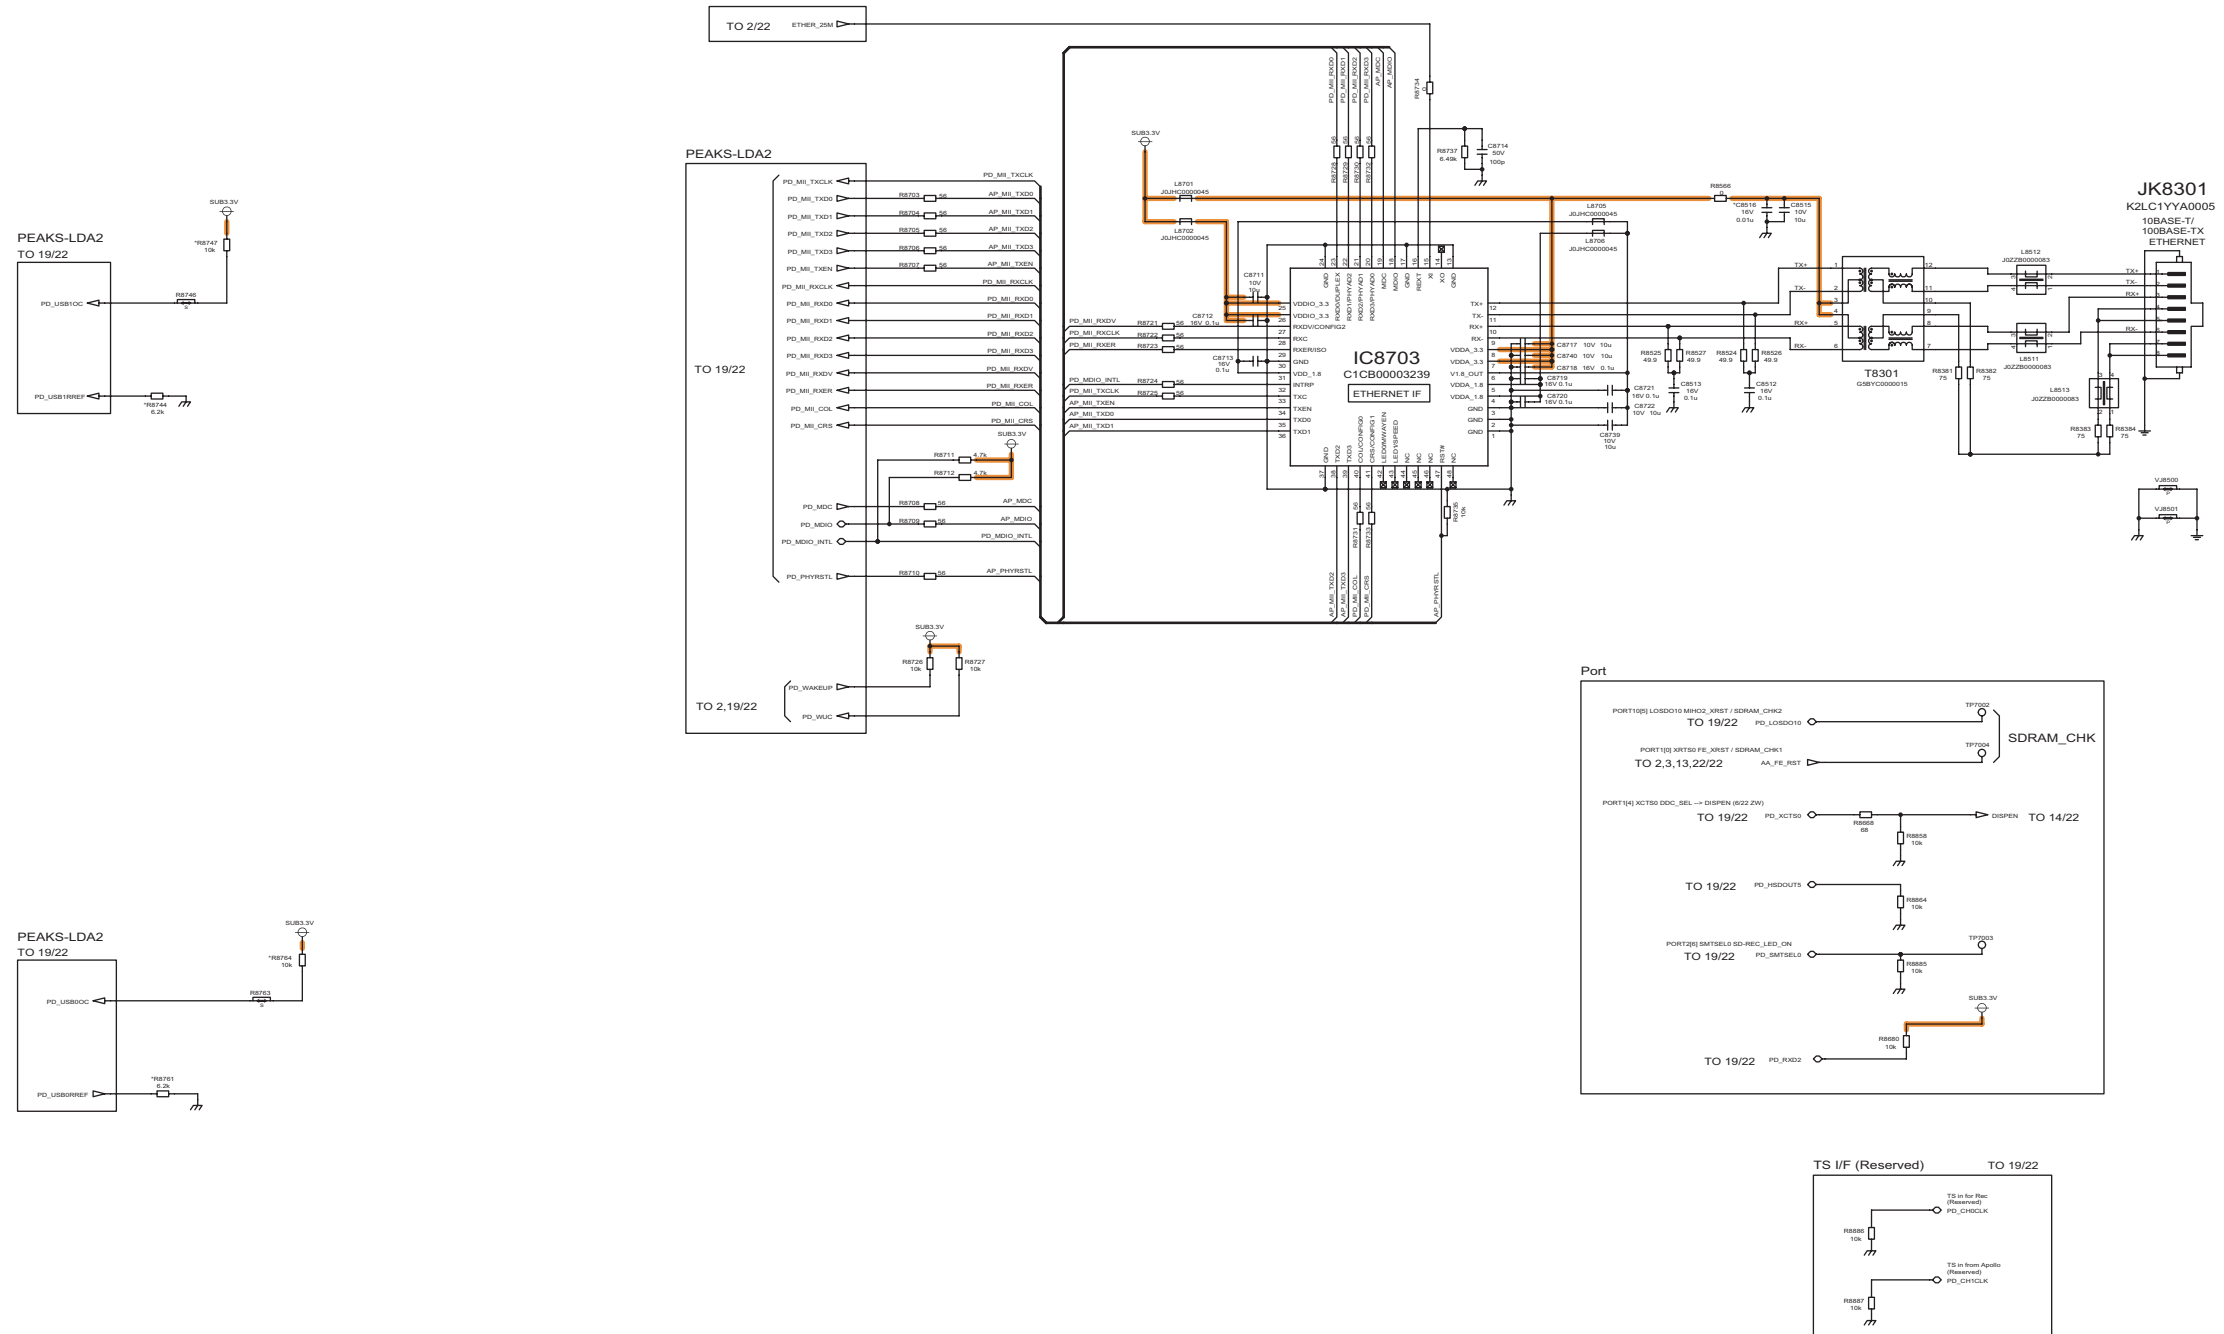



13.9. A-Board (5/22) Schematic Diagram




A-BOARD (5/22)

CI SLOT,SD CARD,FLASH MEMORY

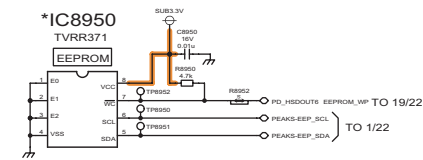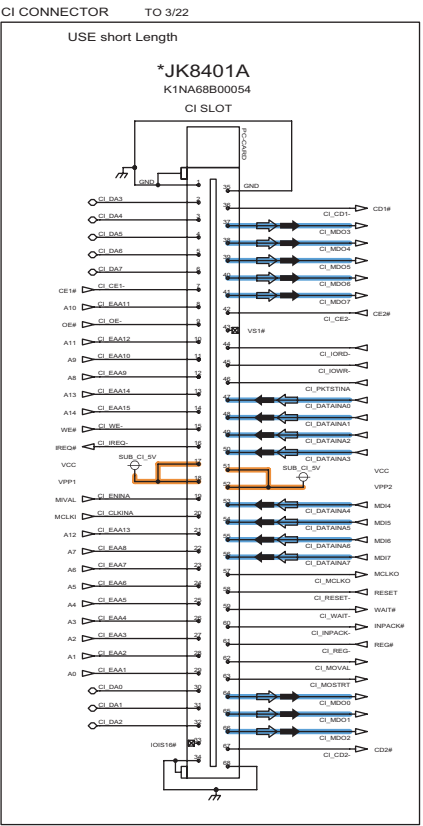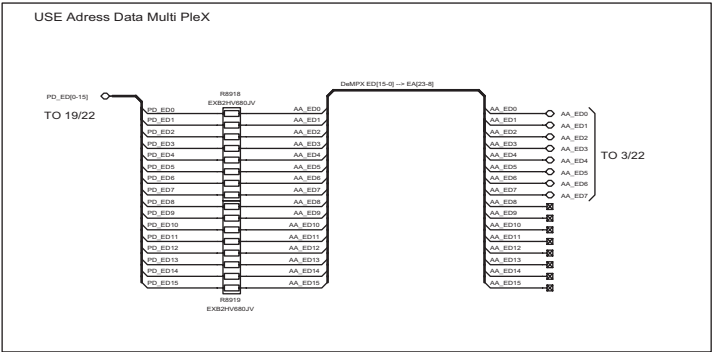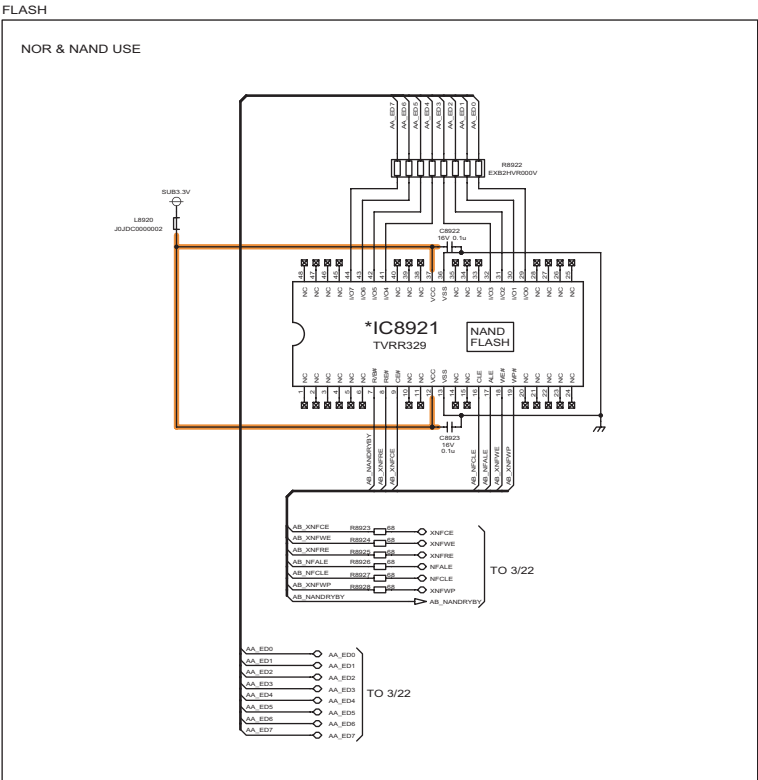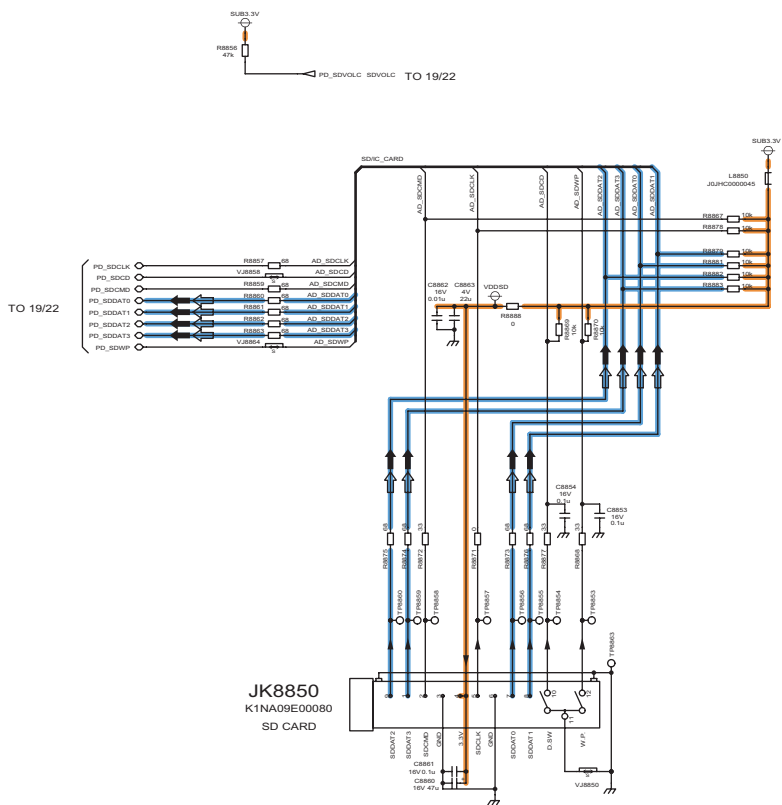


13.10. A-Board (6/22) Schematic Diagram

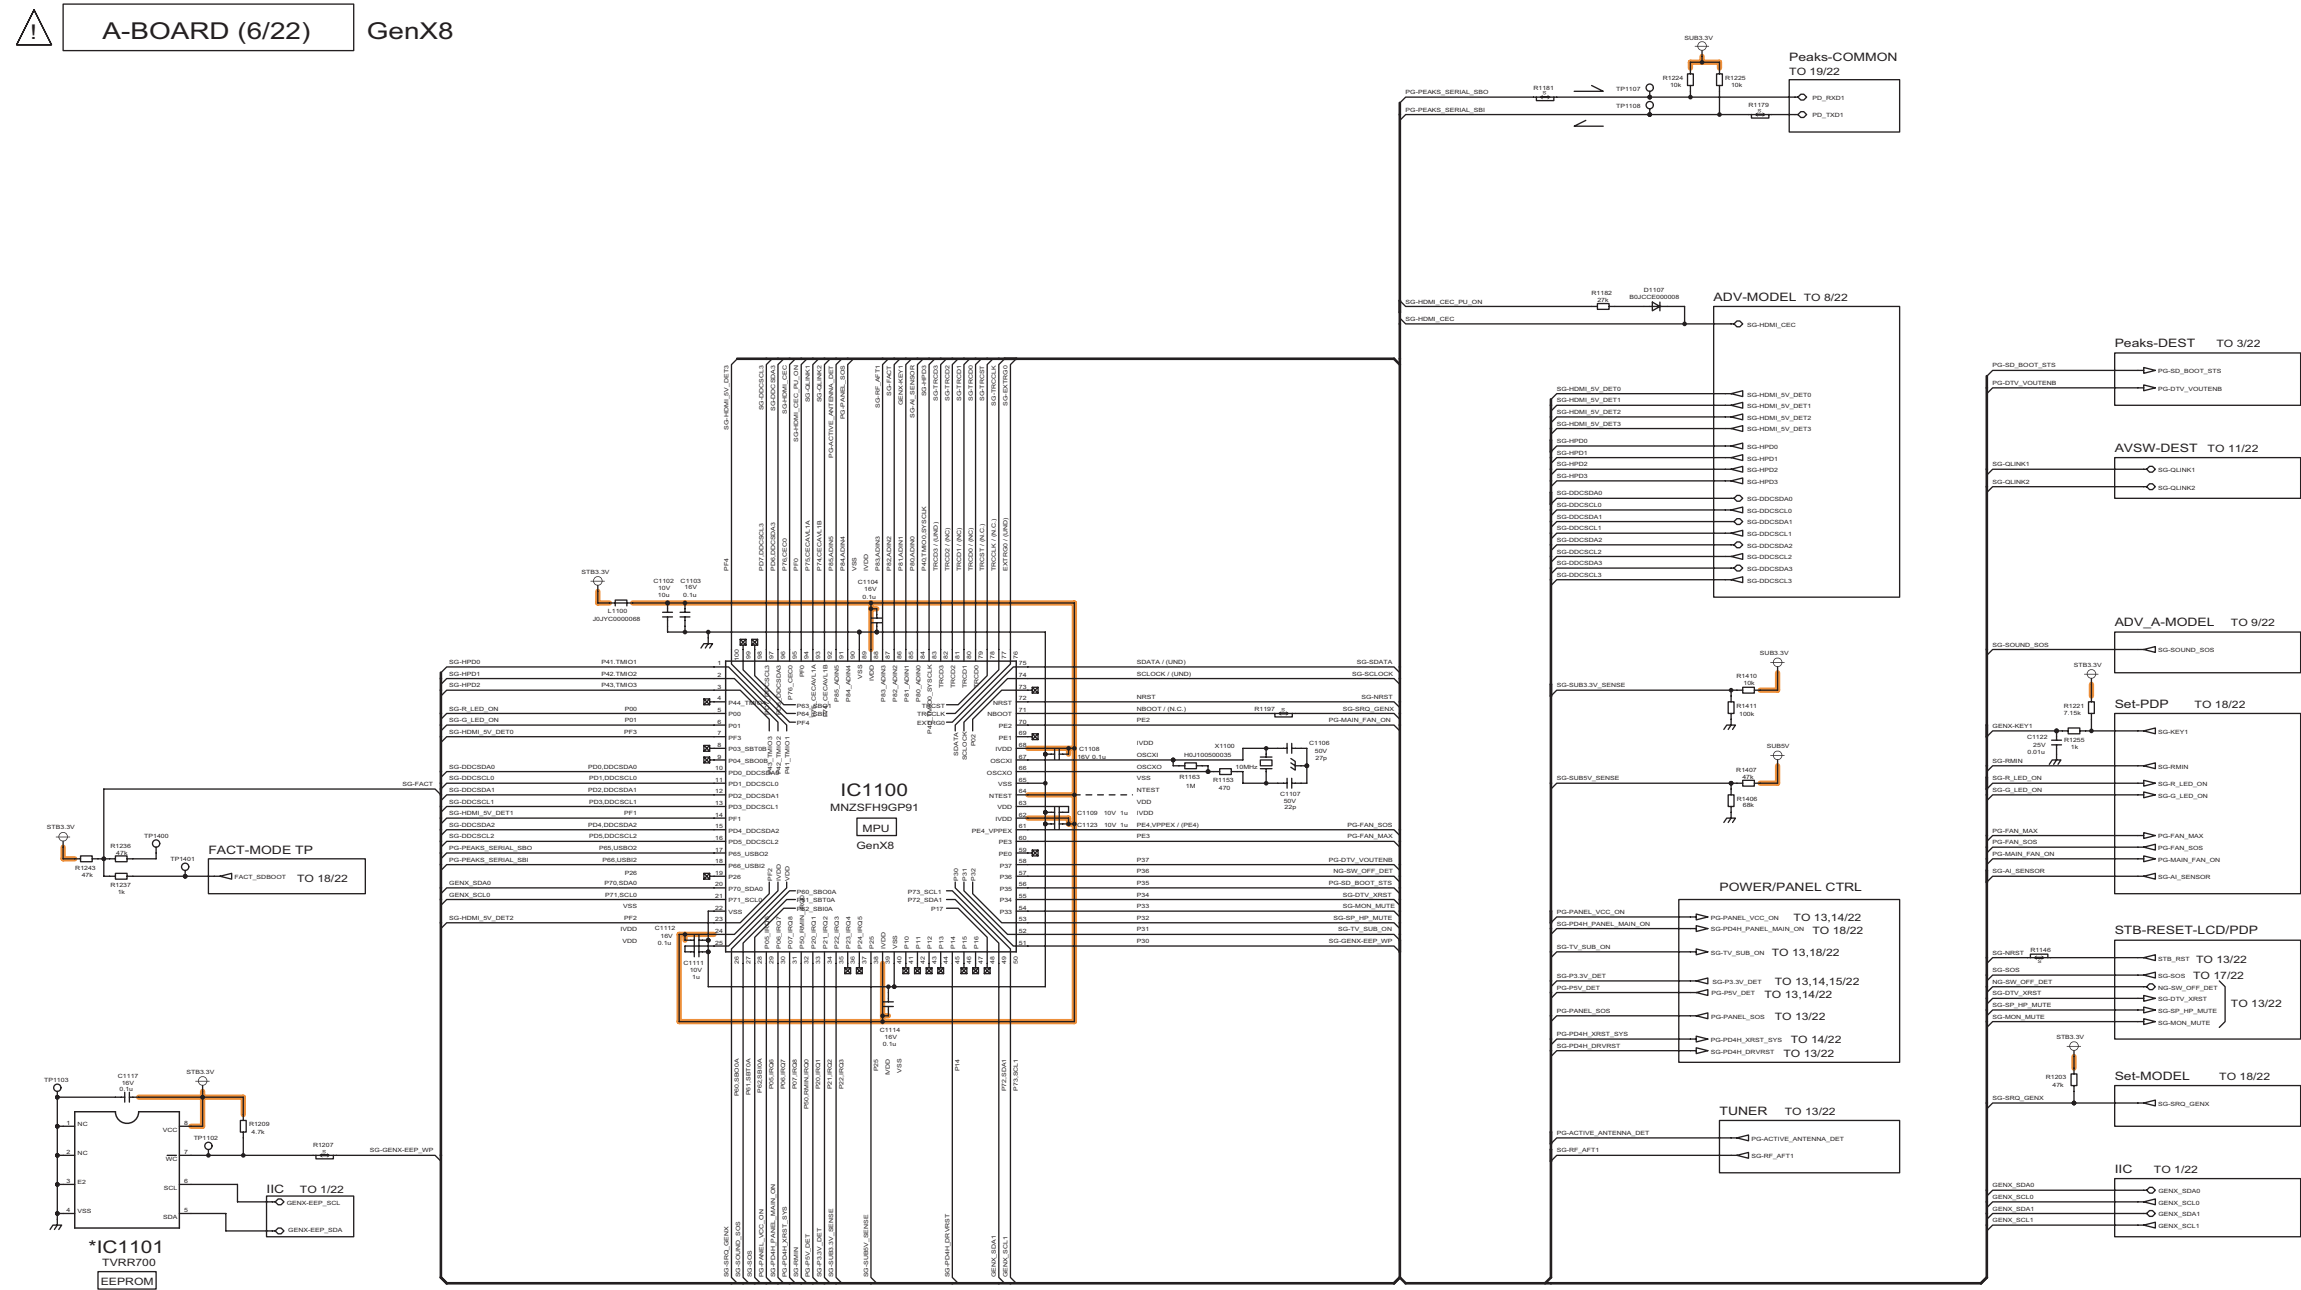

13.11. A-Board (7/22) Schematic Diagram

! A-BOARD (7/22) HDMI

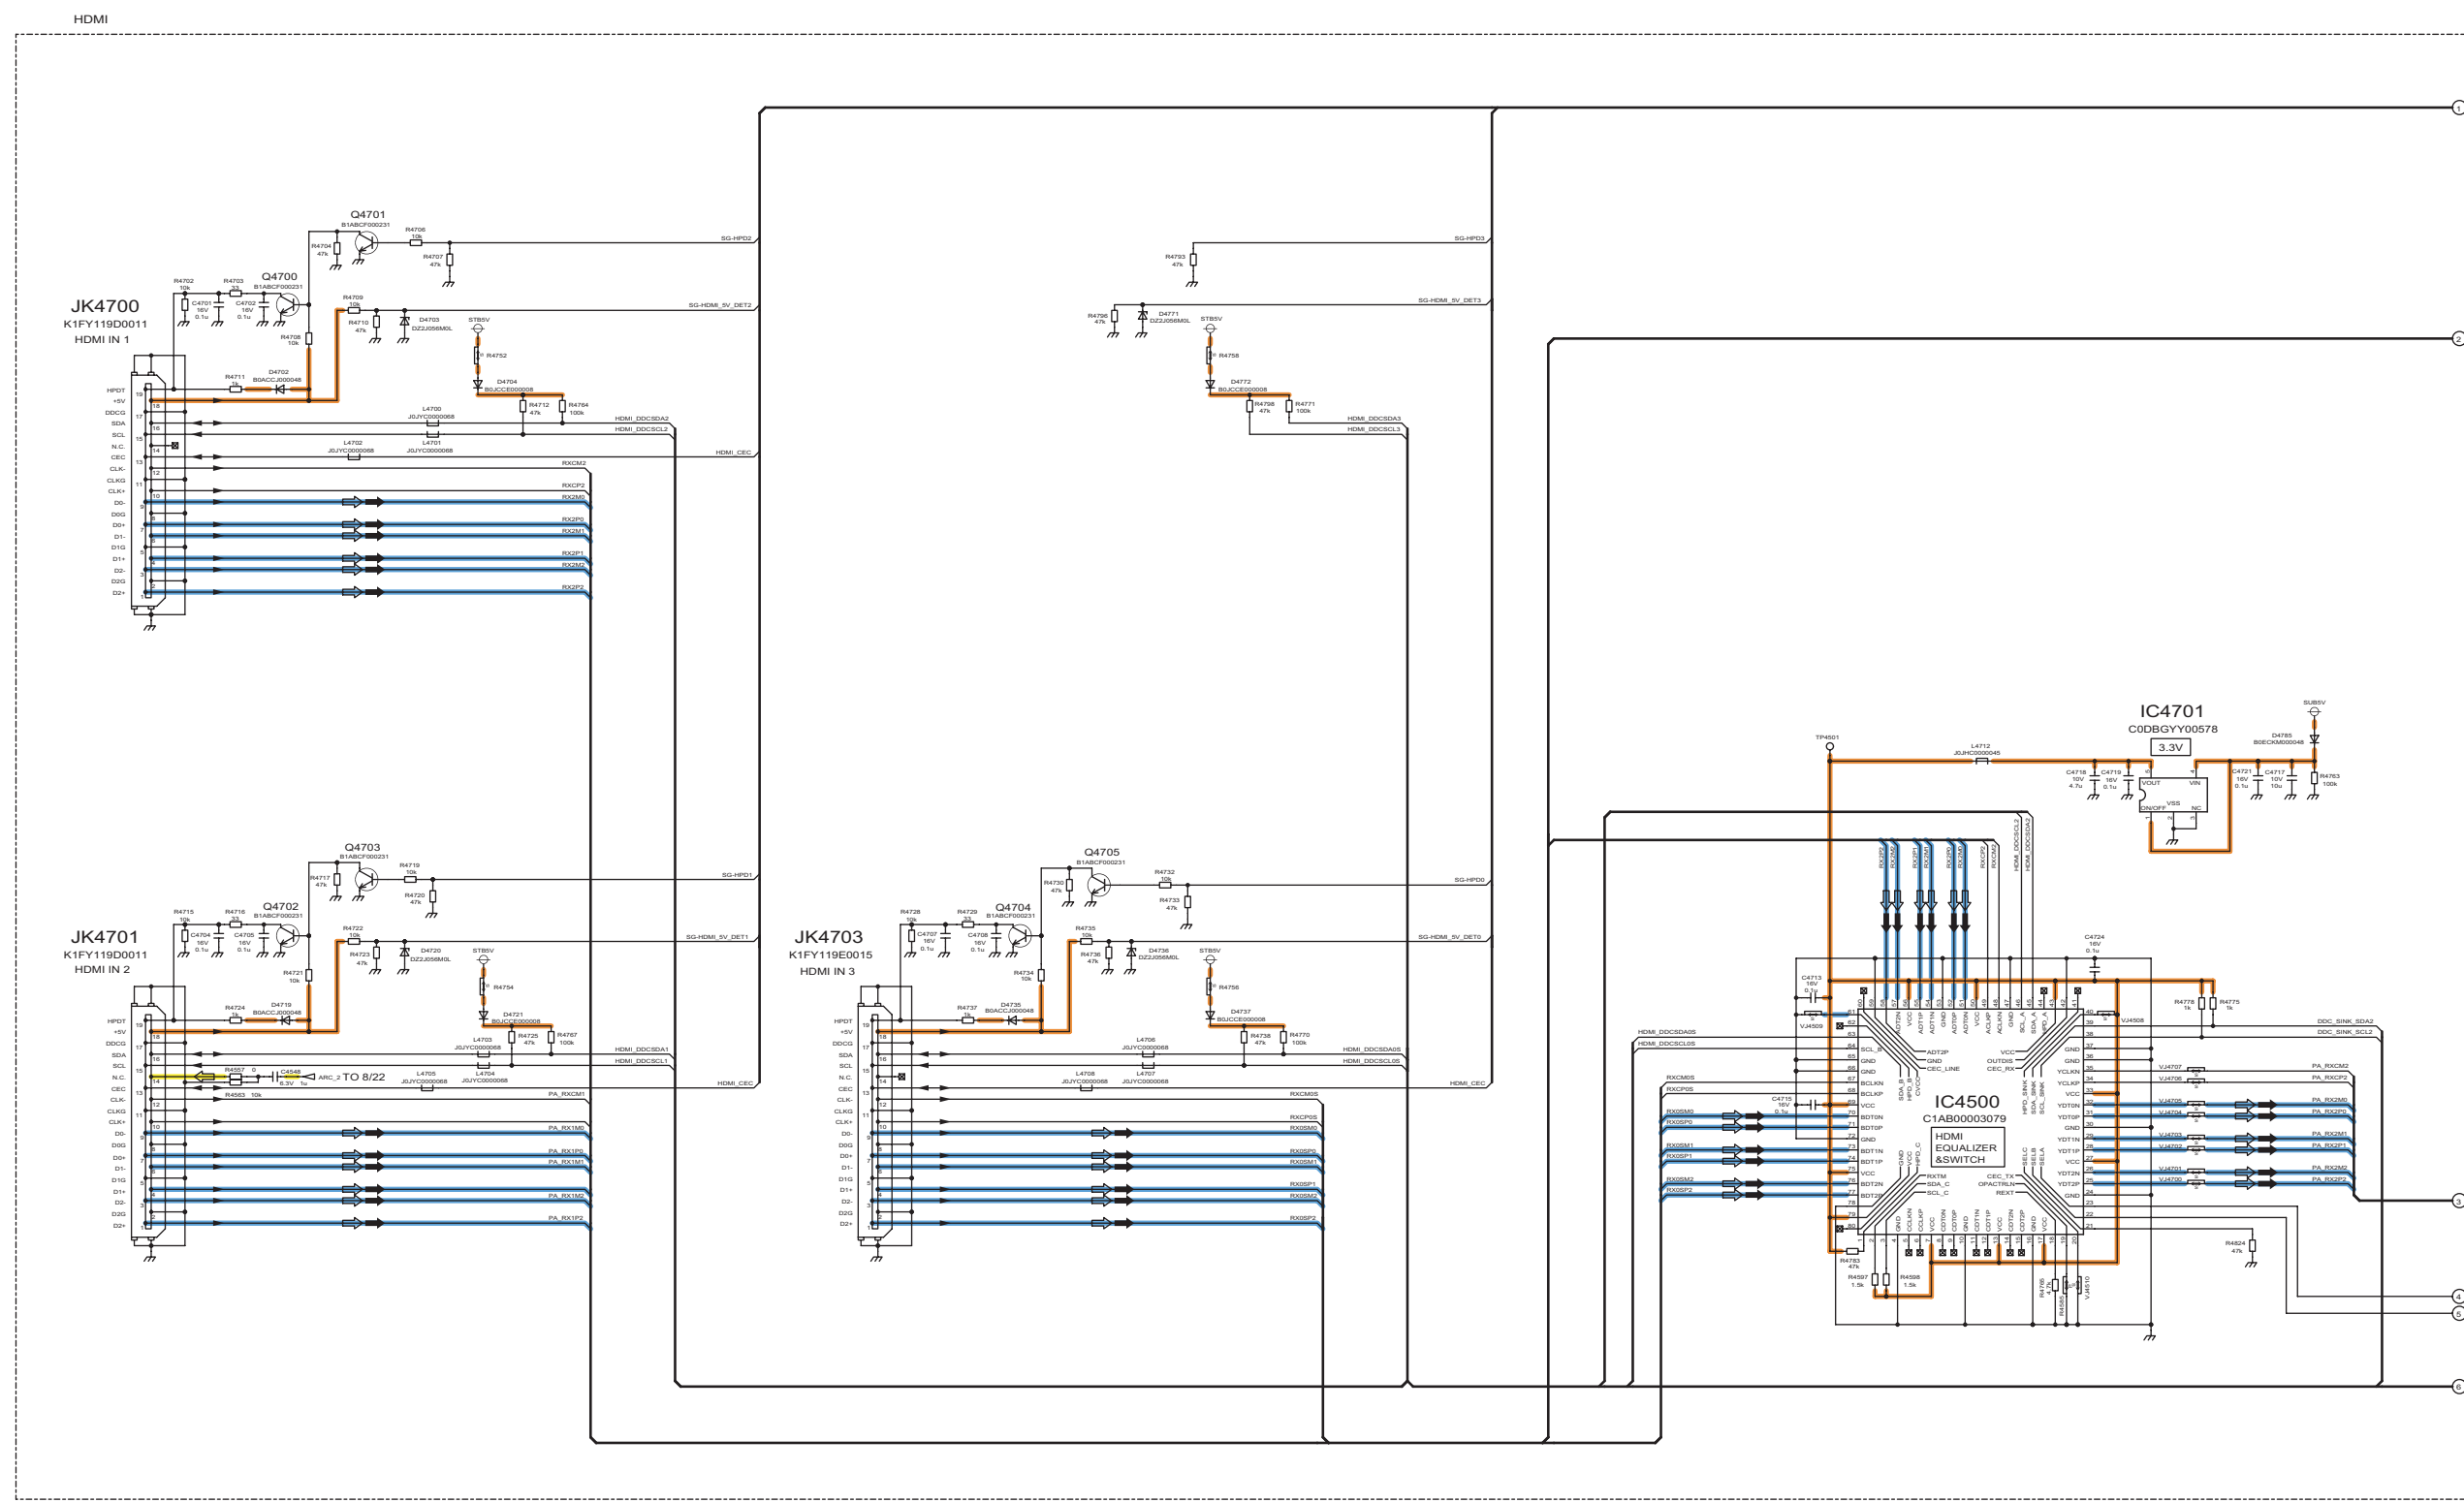

55

56

57

58

59





60

61


62

63


13.12. A-Board (8/22) Schematic Diagram

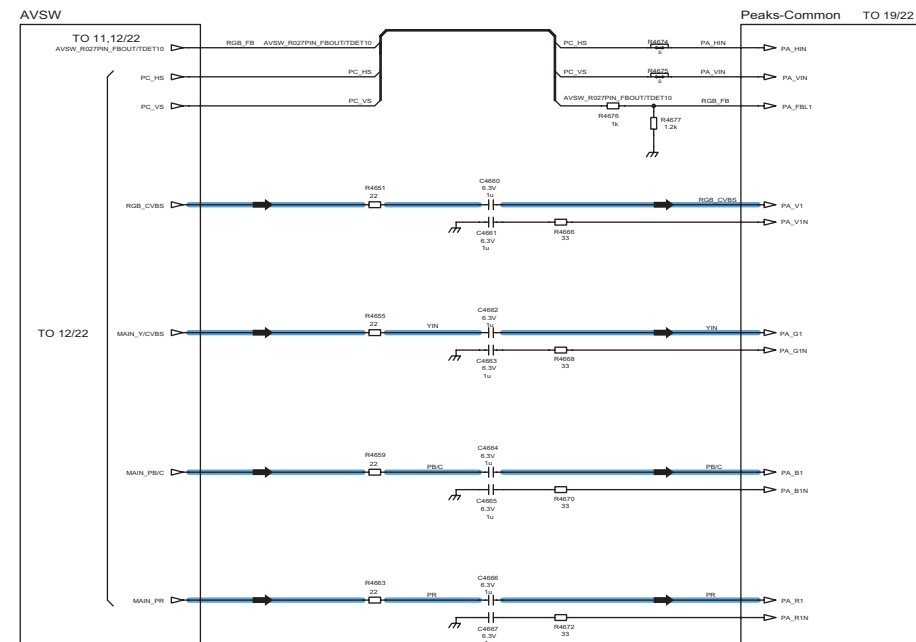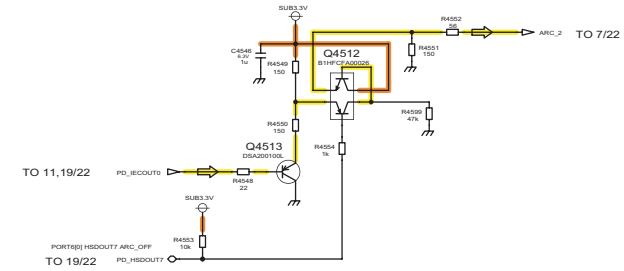
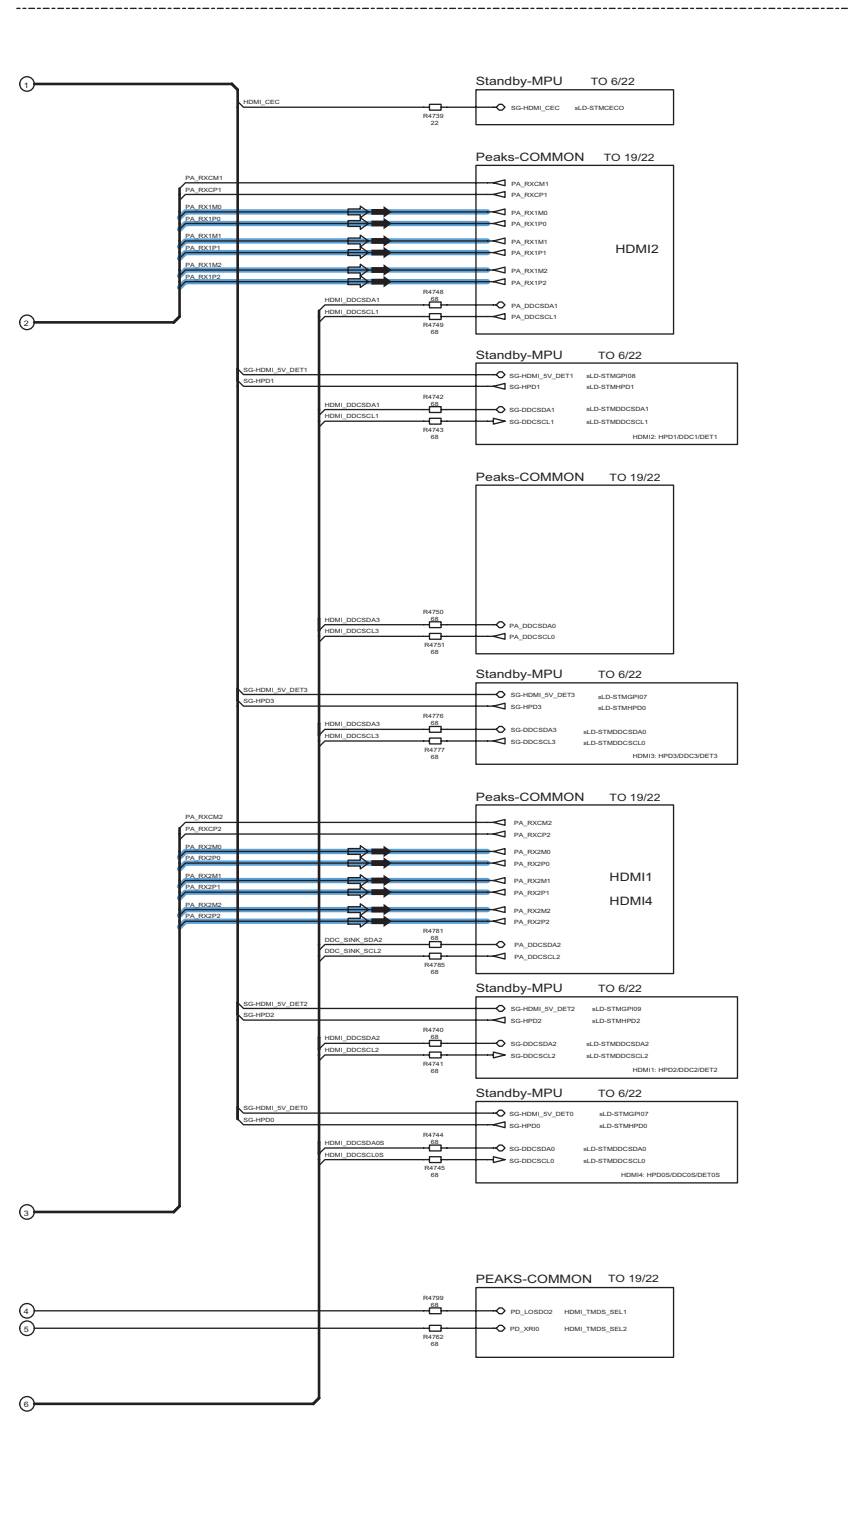



13.13. A-Board (9/22) Schematic Diagram

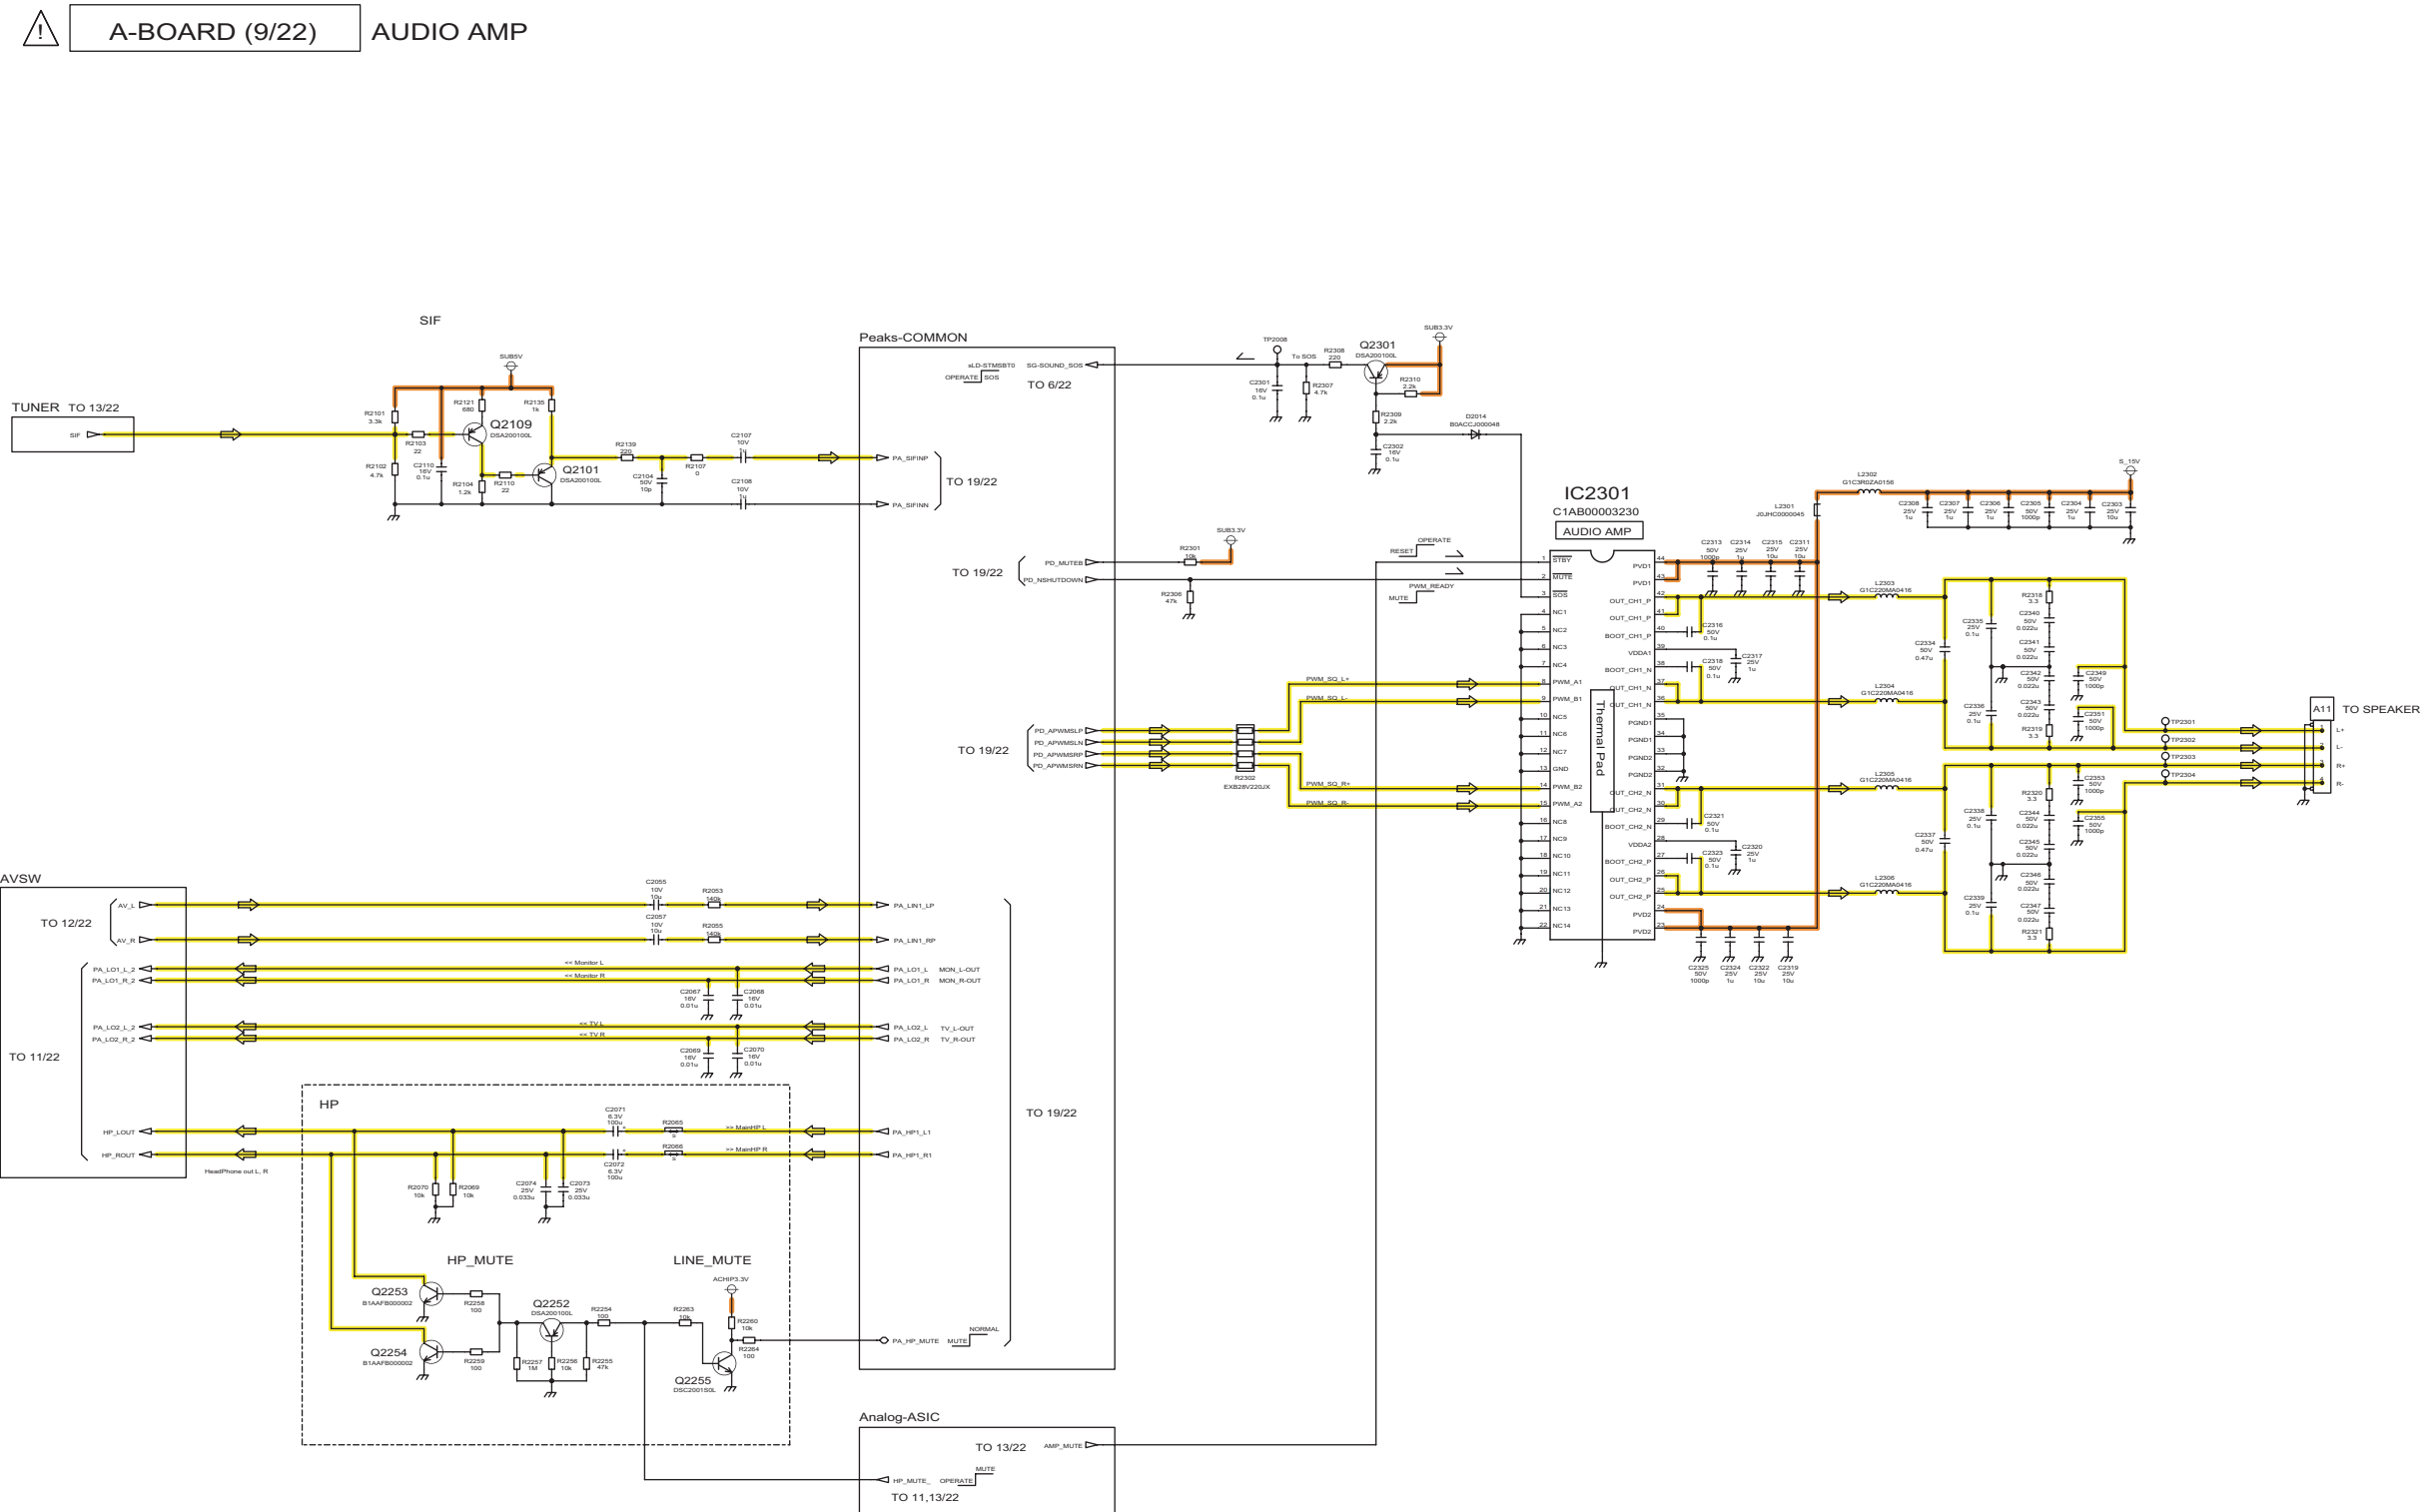


13.14. A-Board (10/22) Schematic Diagram



 A-BOARD (10/22) TERMINAL

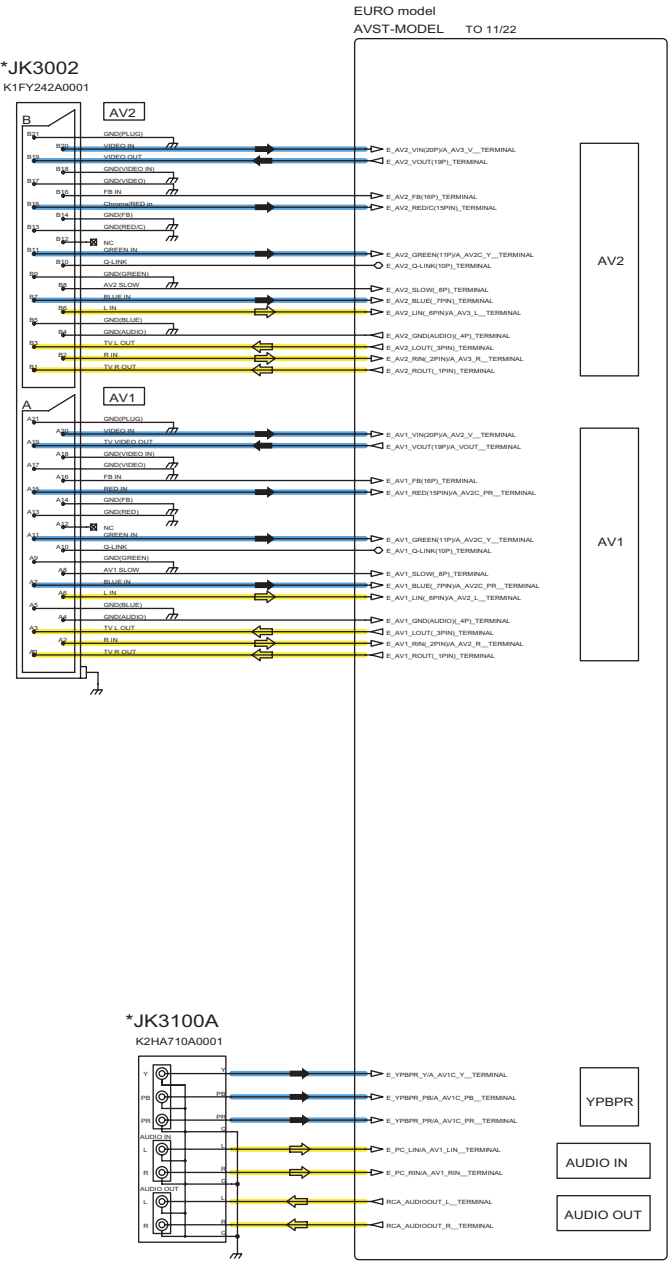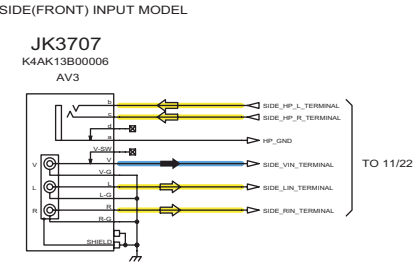


13.15. A-Board (11/22) Schematic Diagram

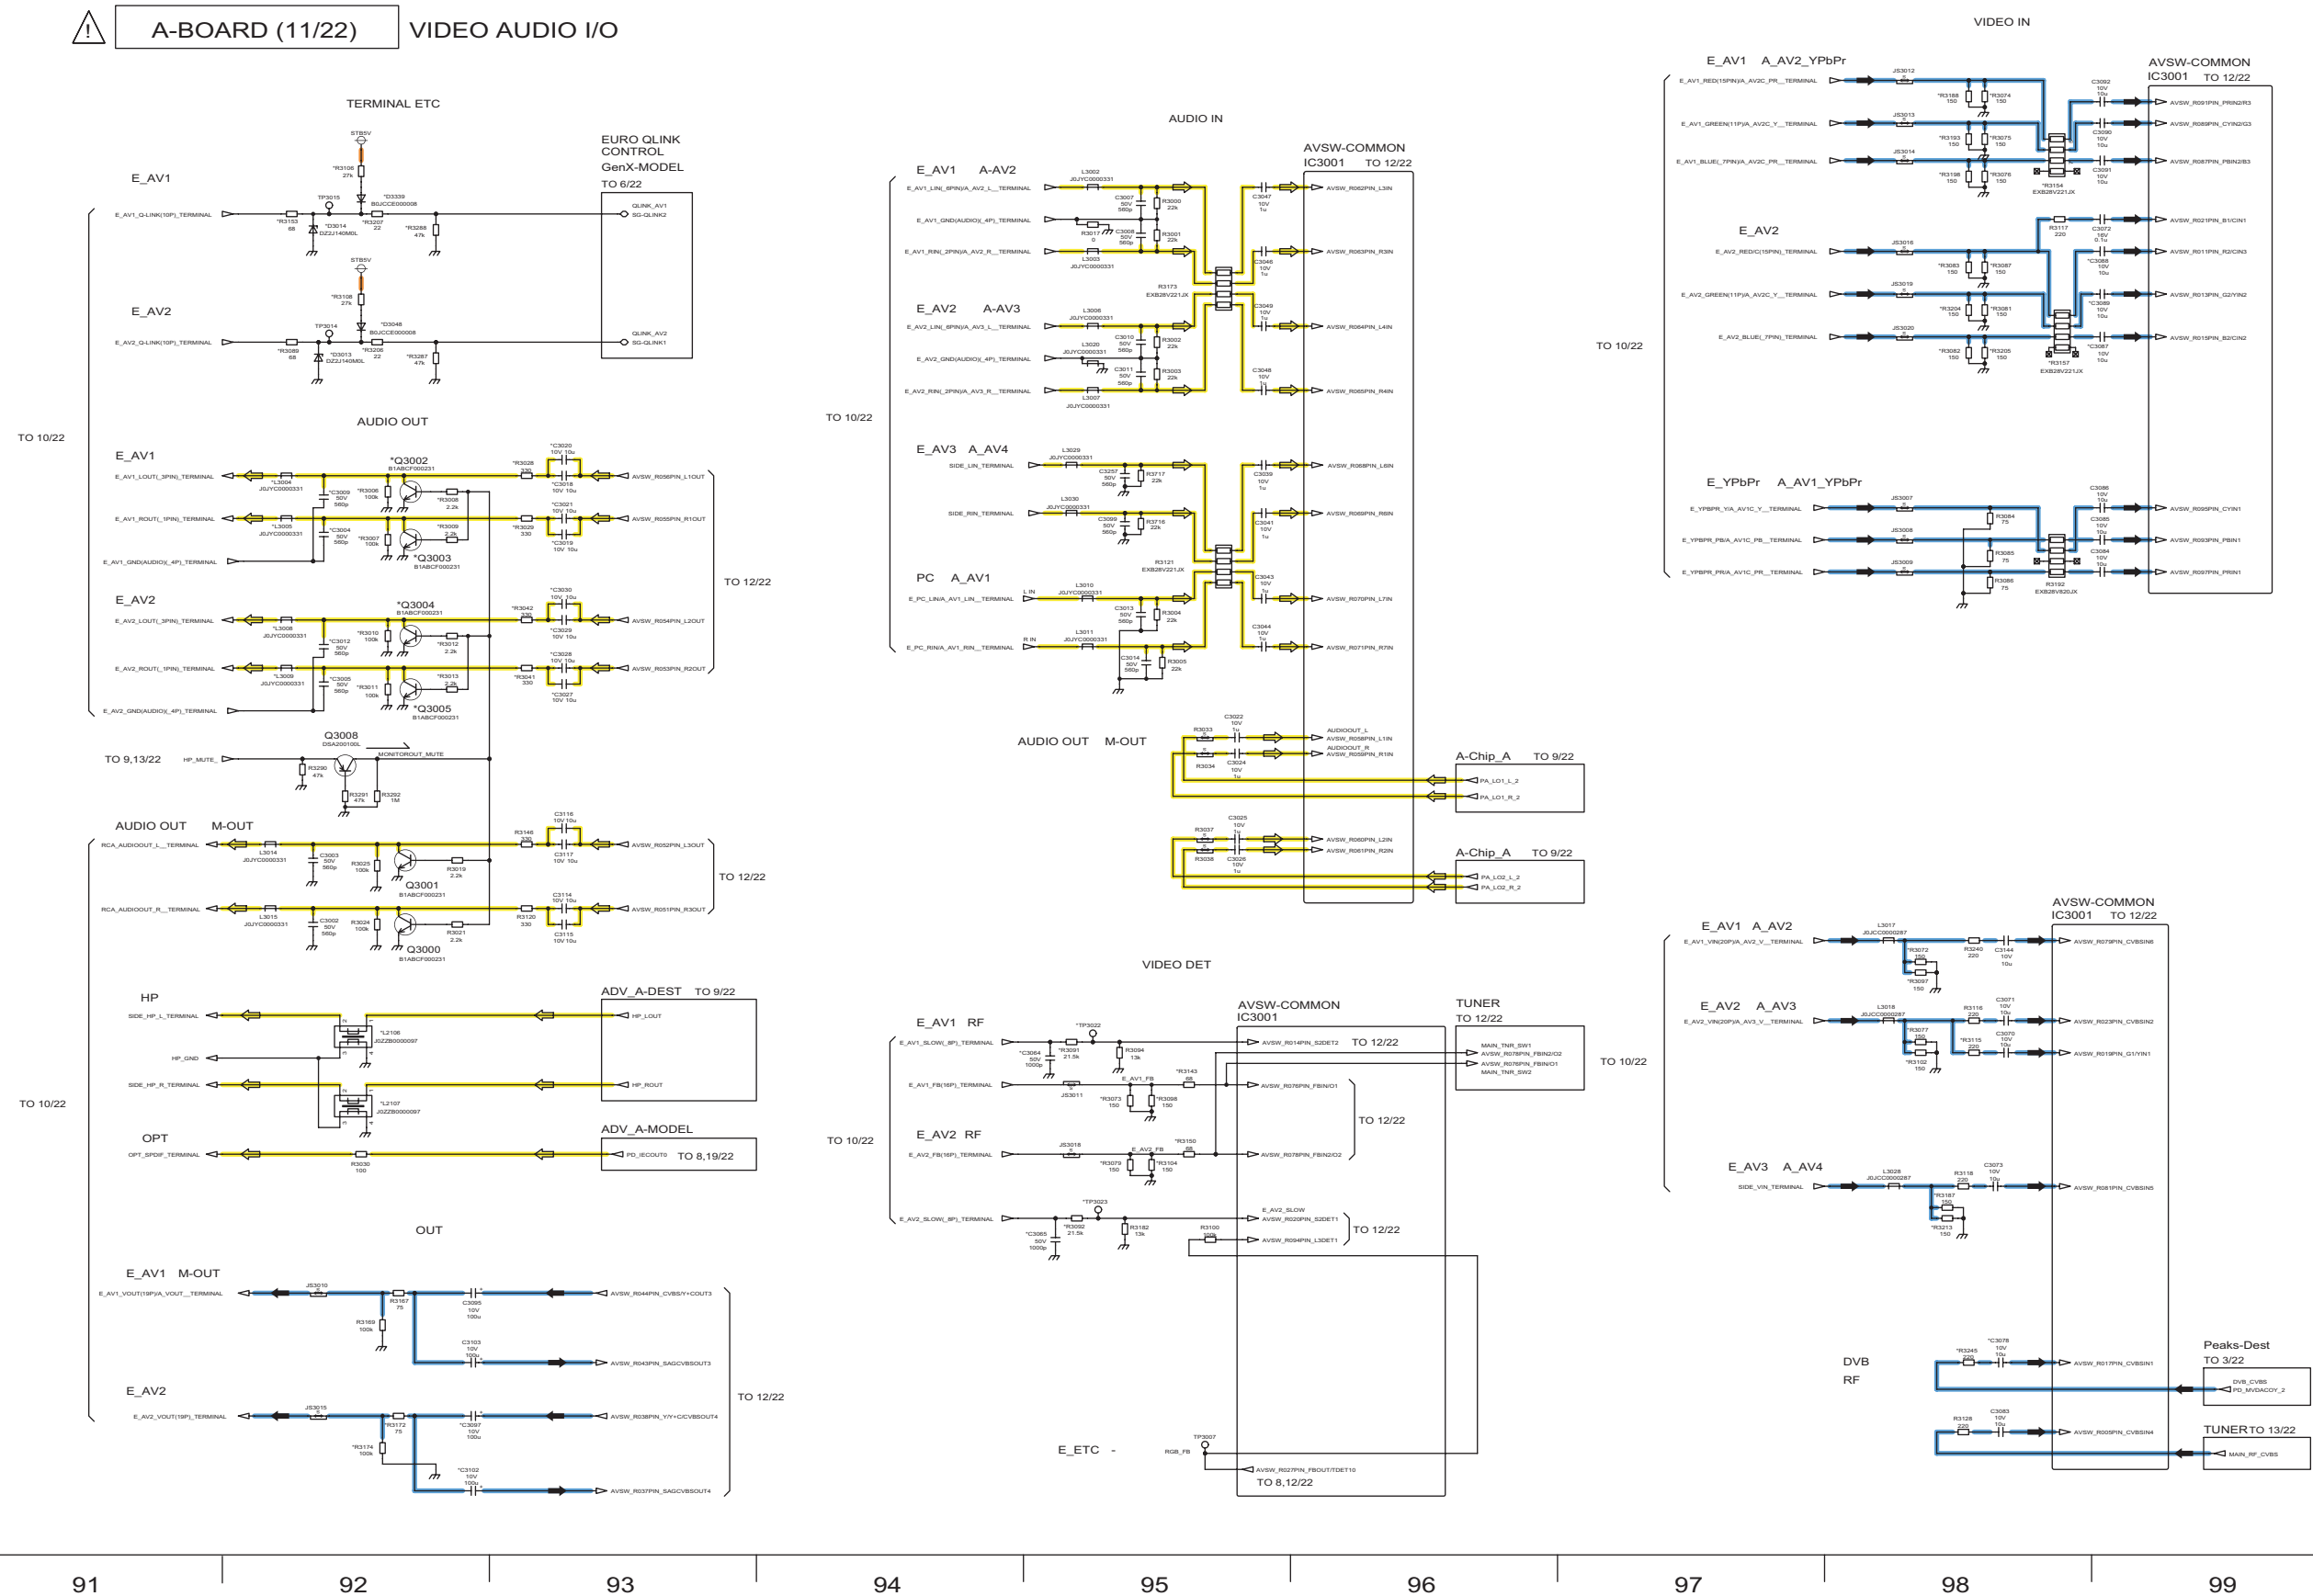




13.16. A-Board (12/22) Schematic Diagram

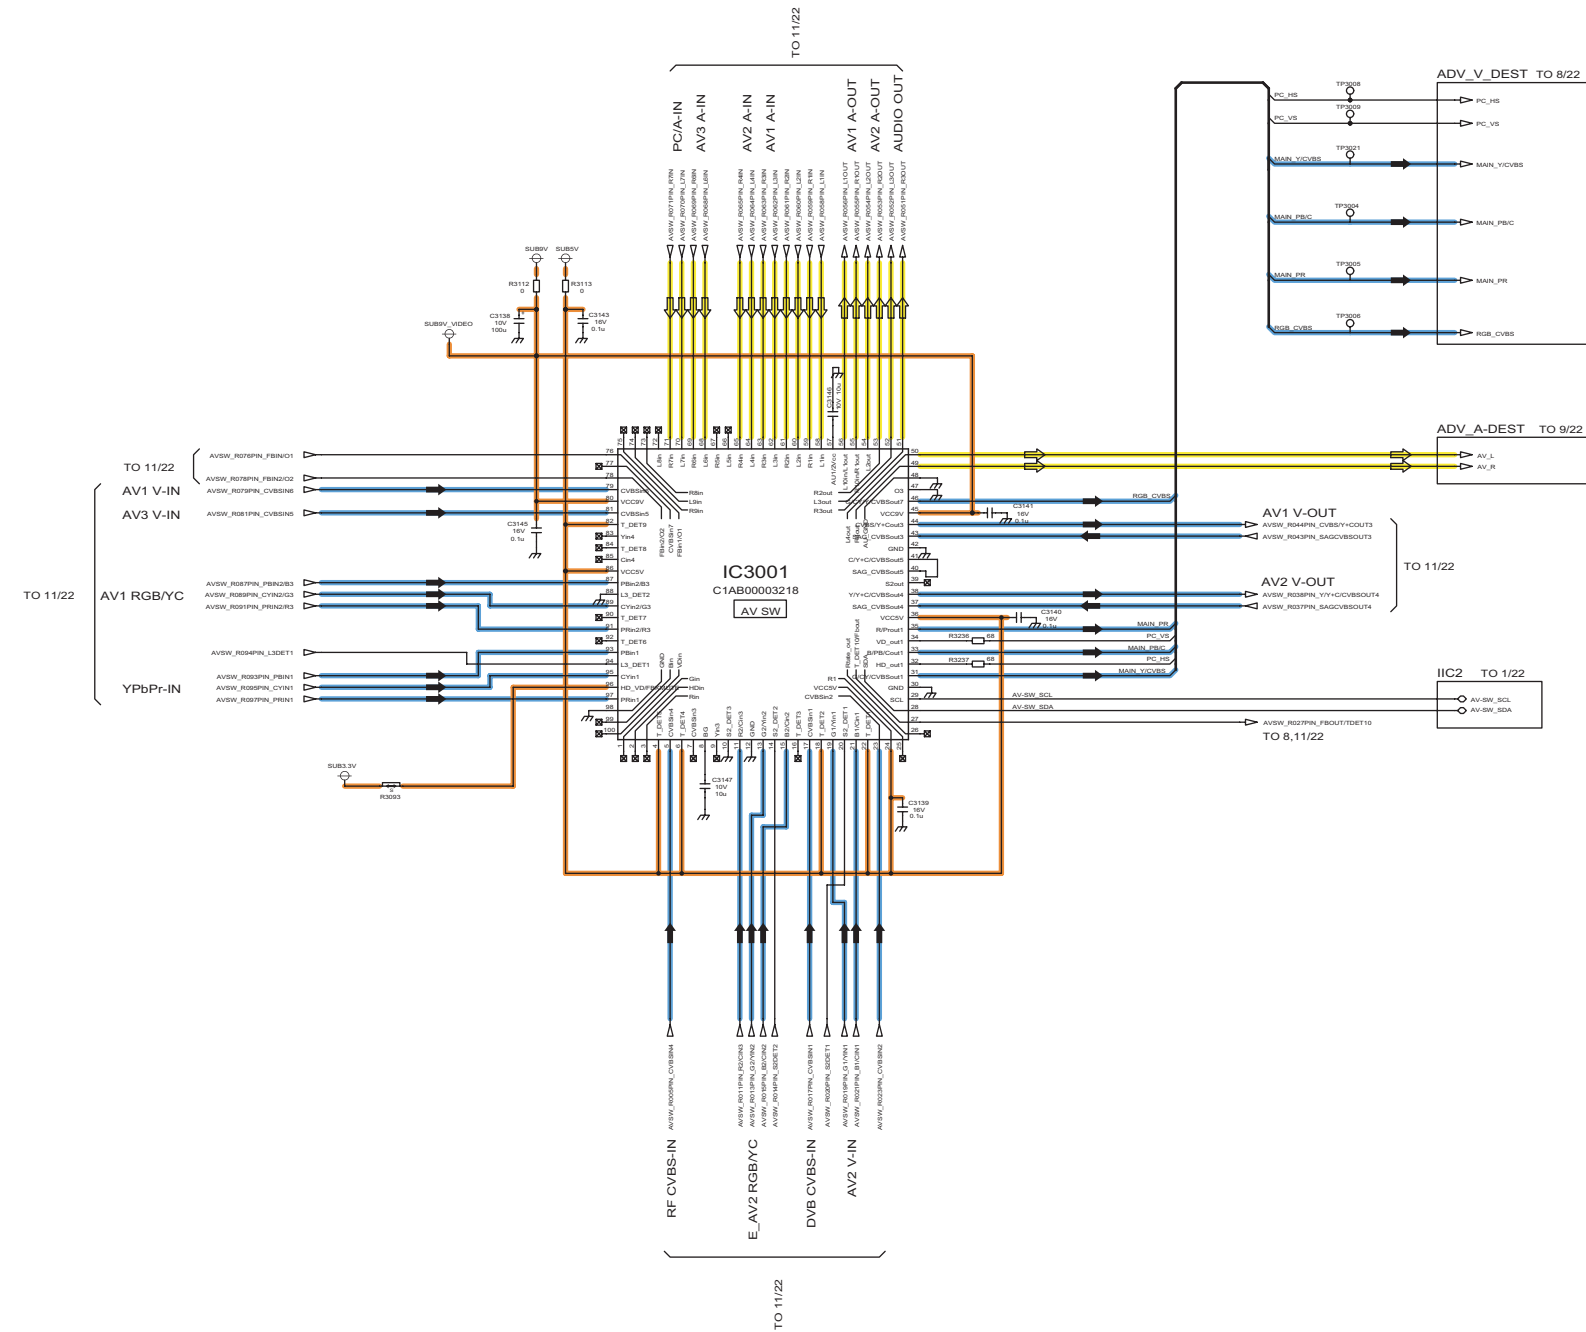

13.17. A-Board (13/22) Schematic Diagram

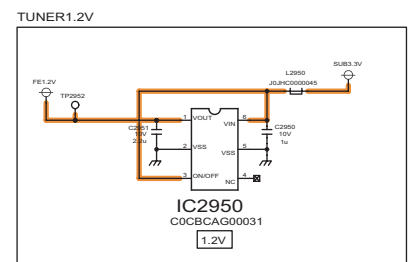


ACTIVE ANTENNA

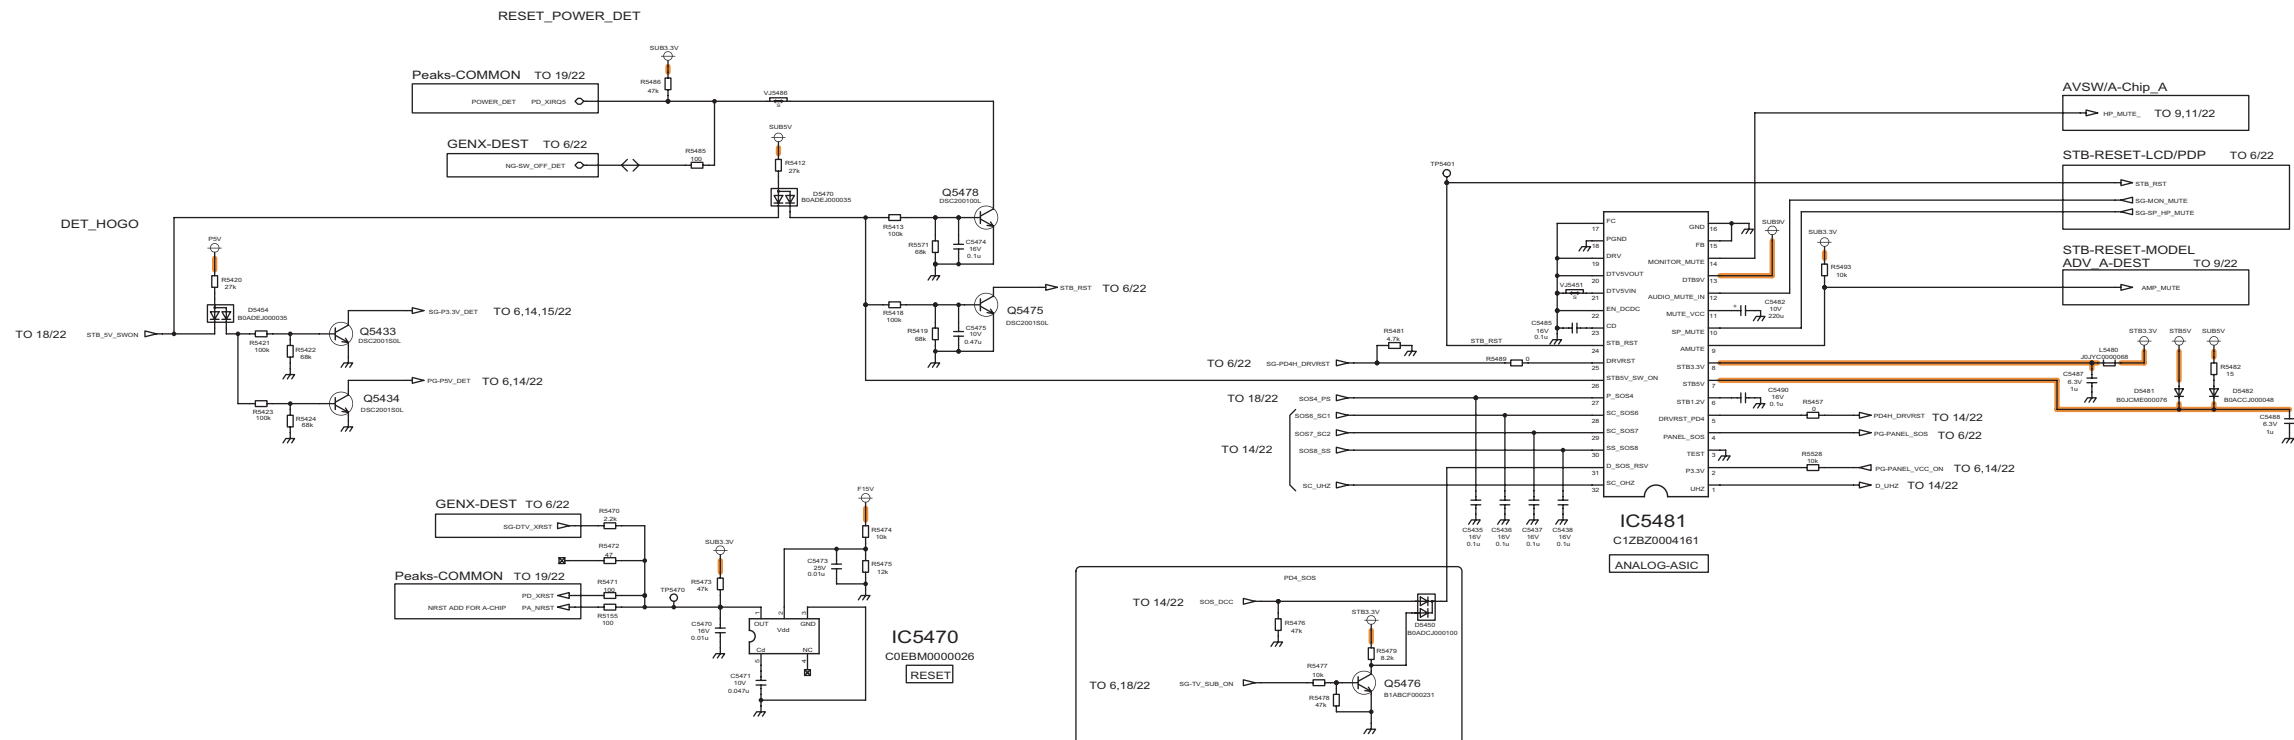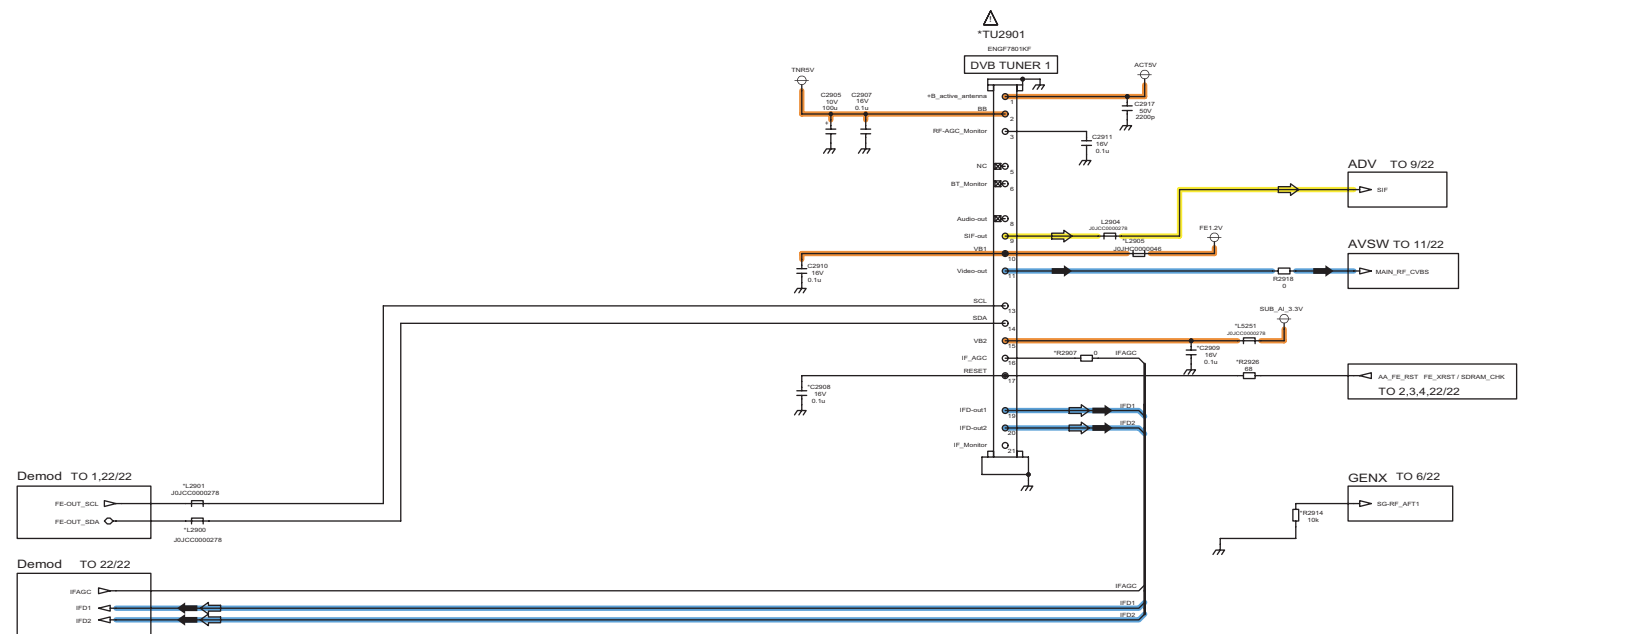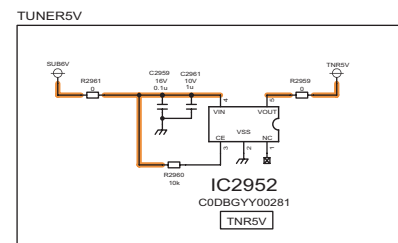


13.18. A-Board (14/22) Schematic Diagram

1 A-BOARD (14/22) DC-DC CONVERTER


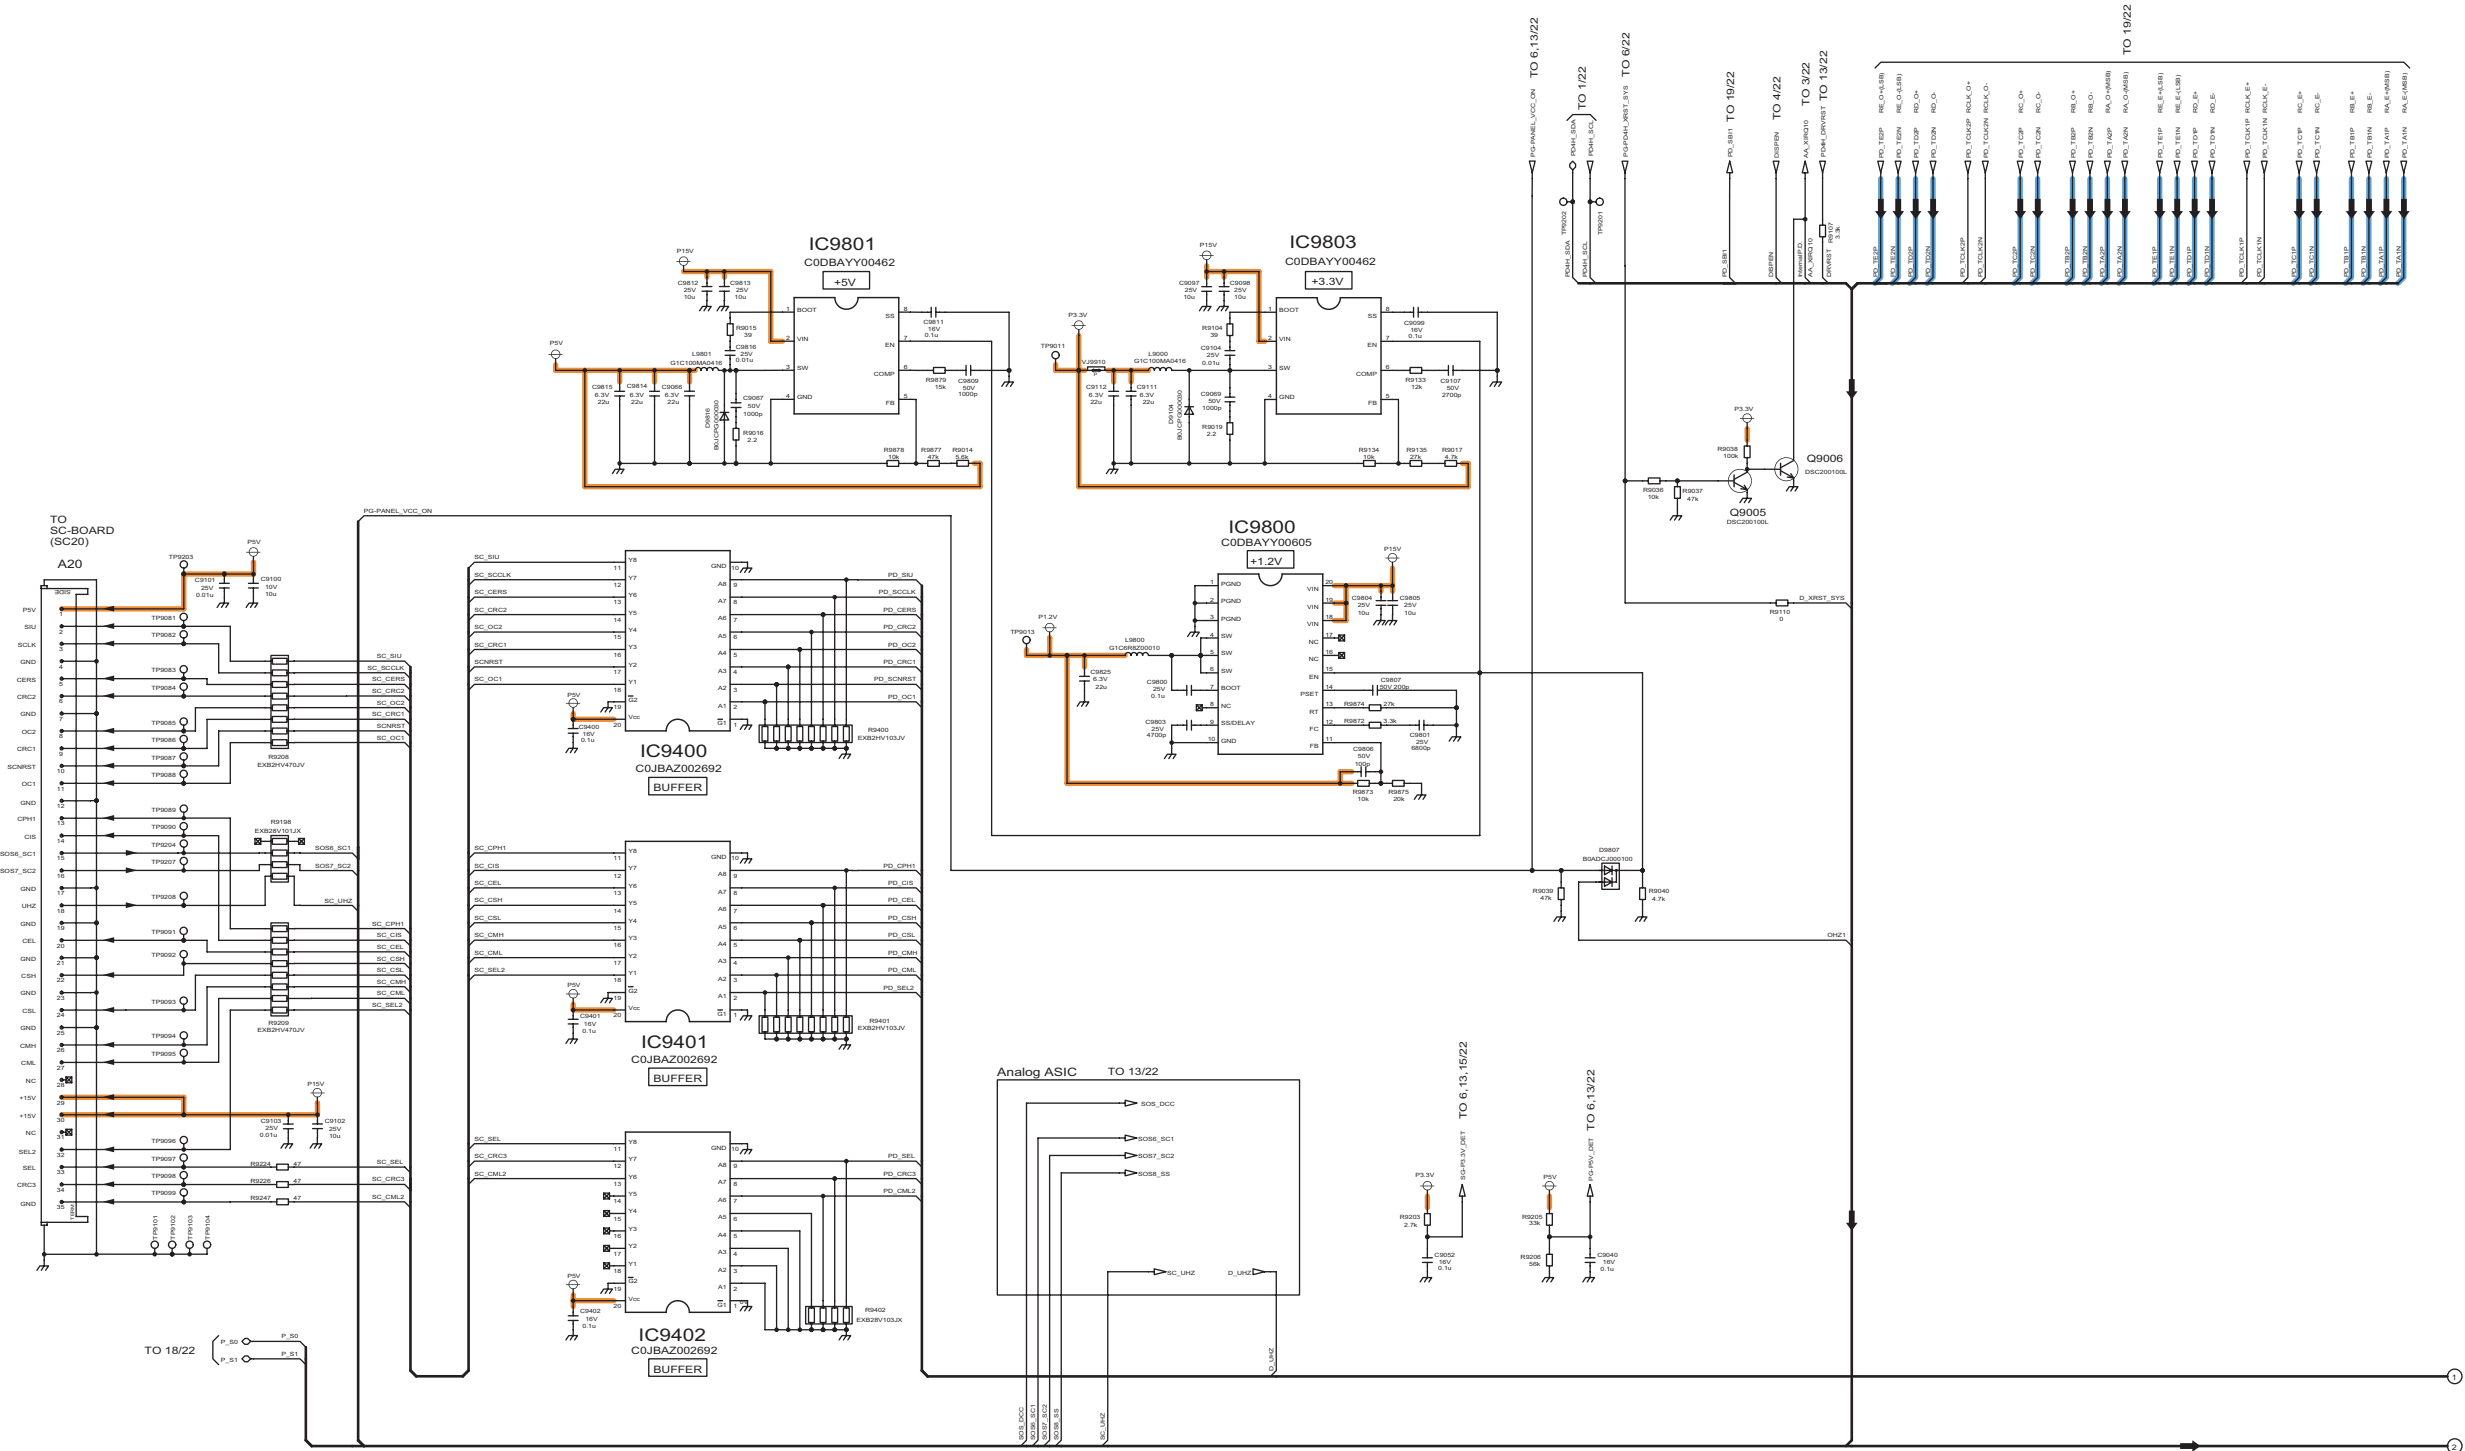


13.19. A-Board (15/22) Schematic Diagram

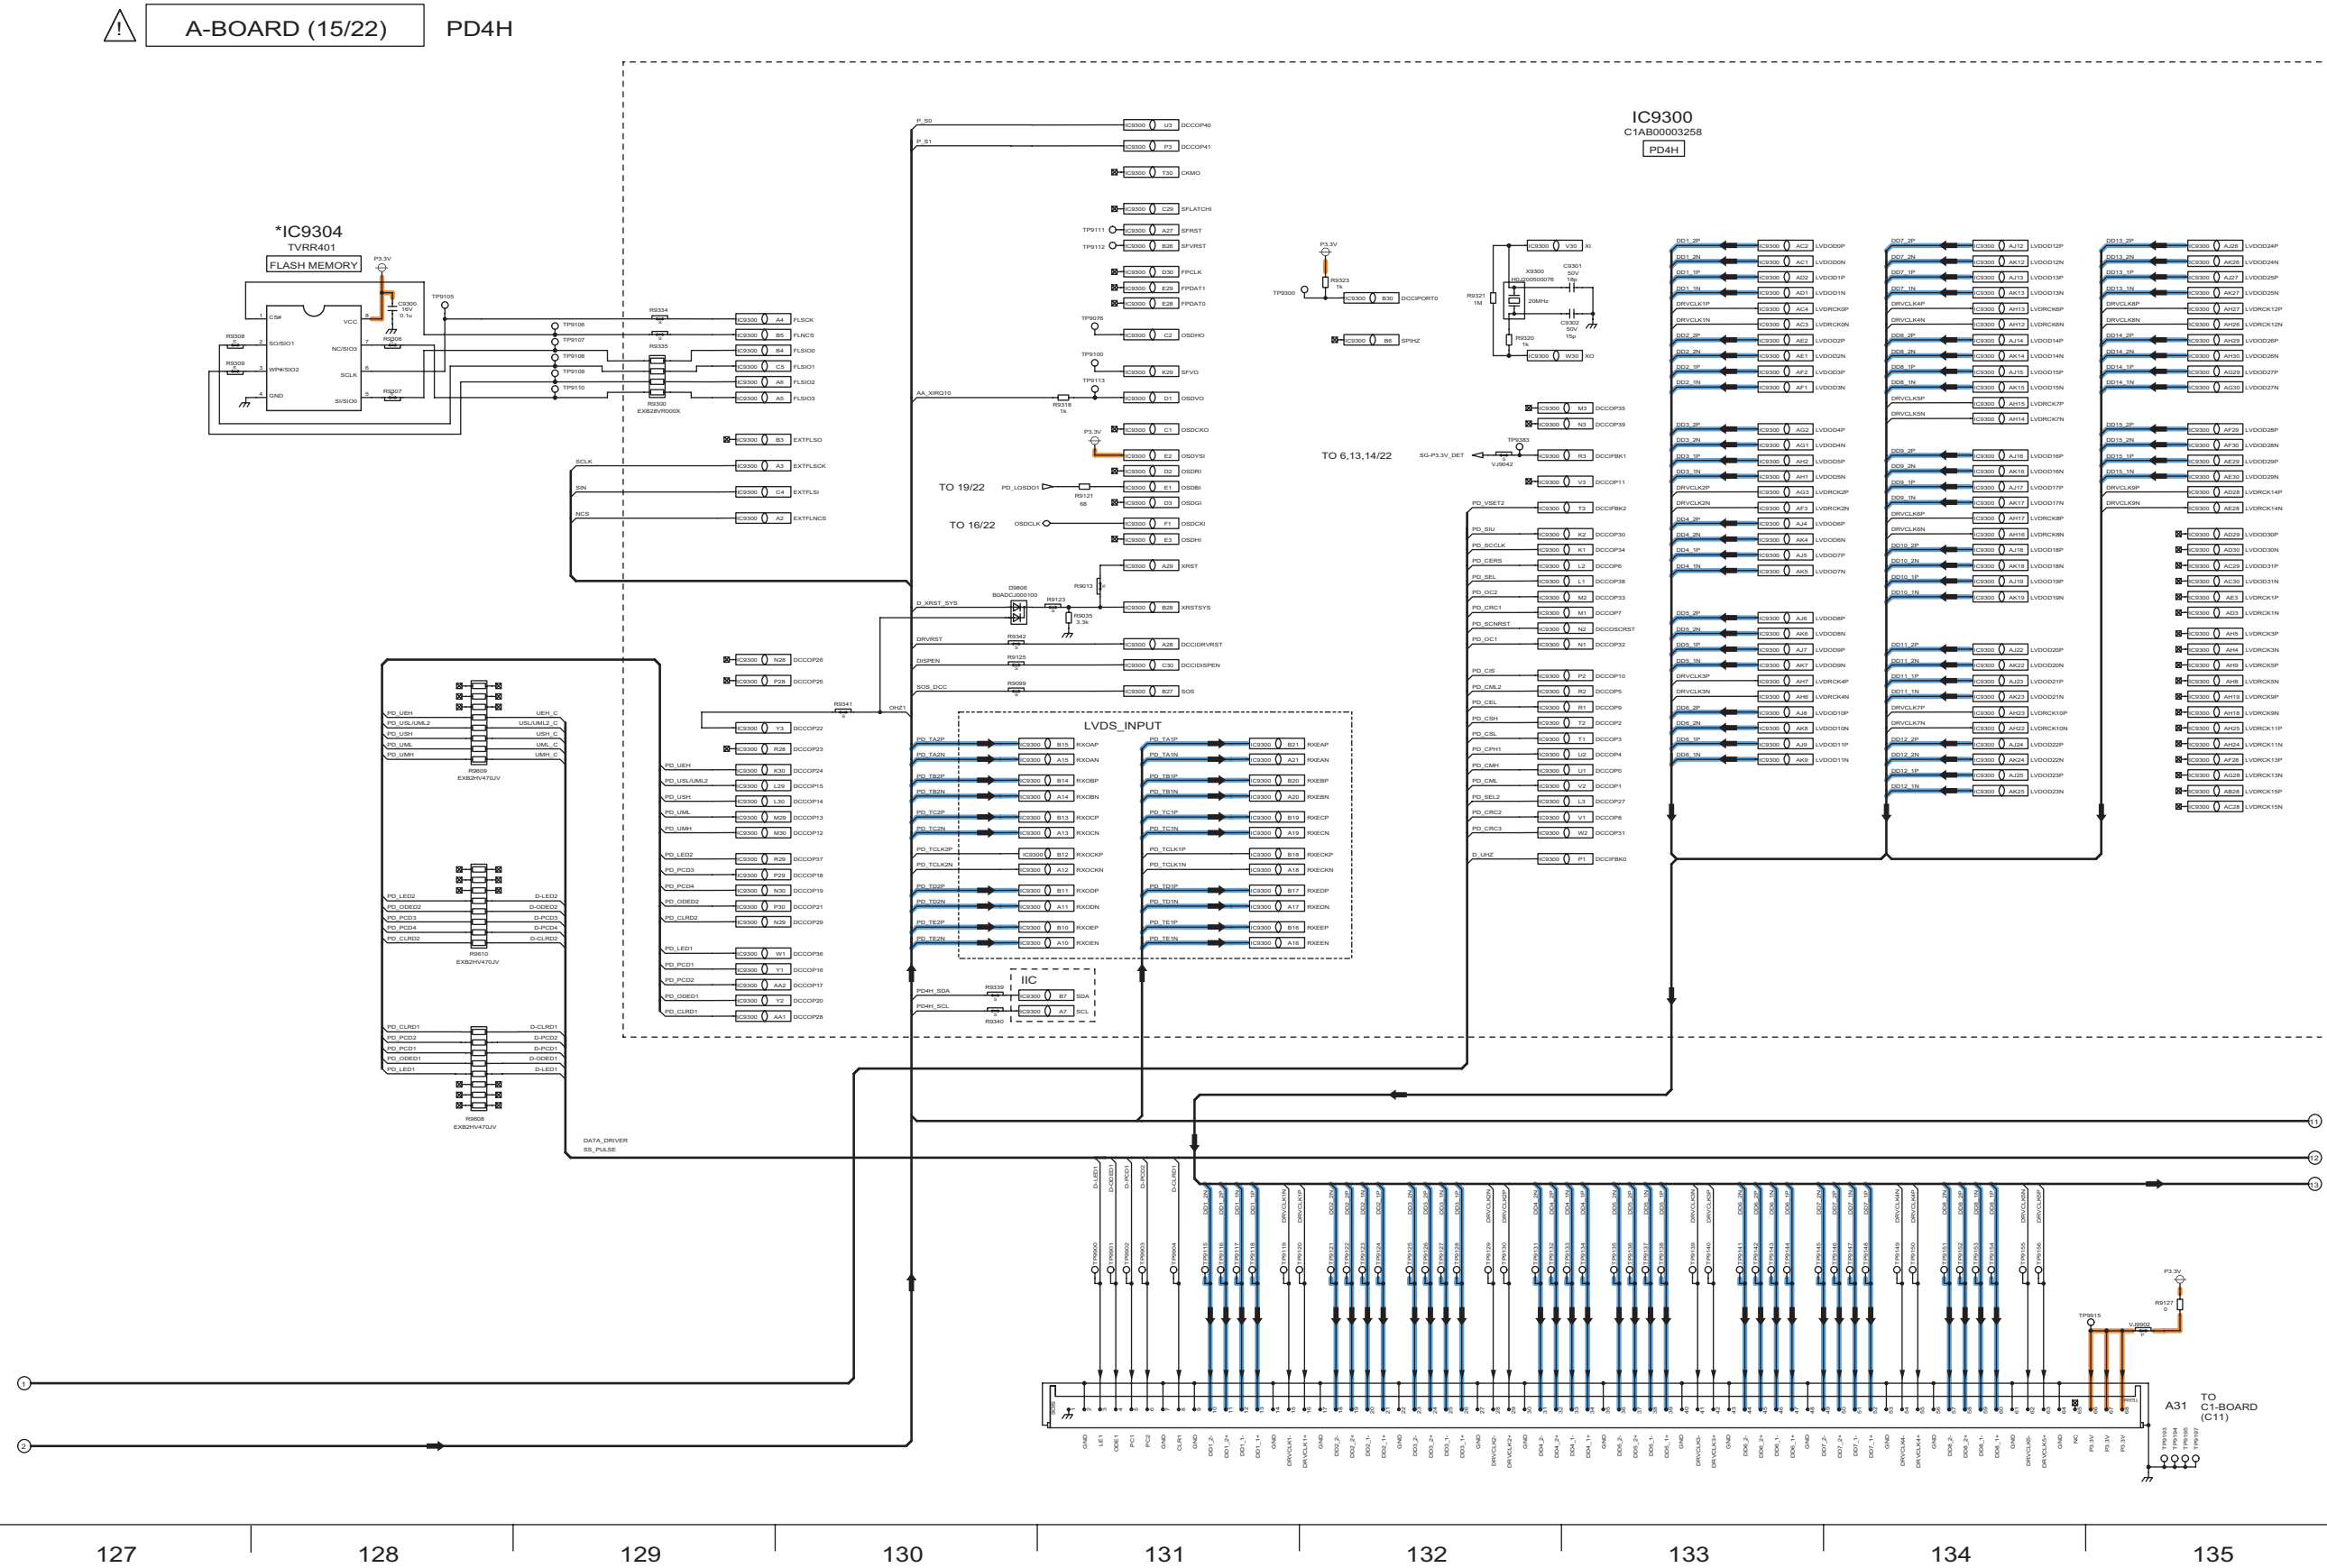

13.20. A-Board (16/22) Schematic Diagram

A-BOARD (16/22) PD4H

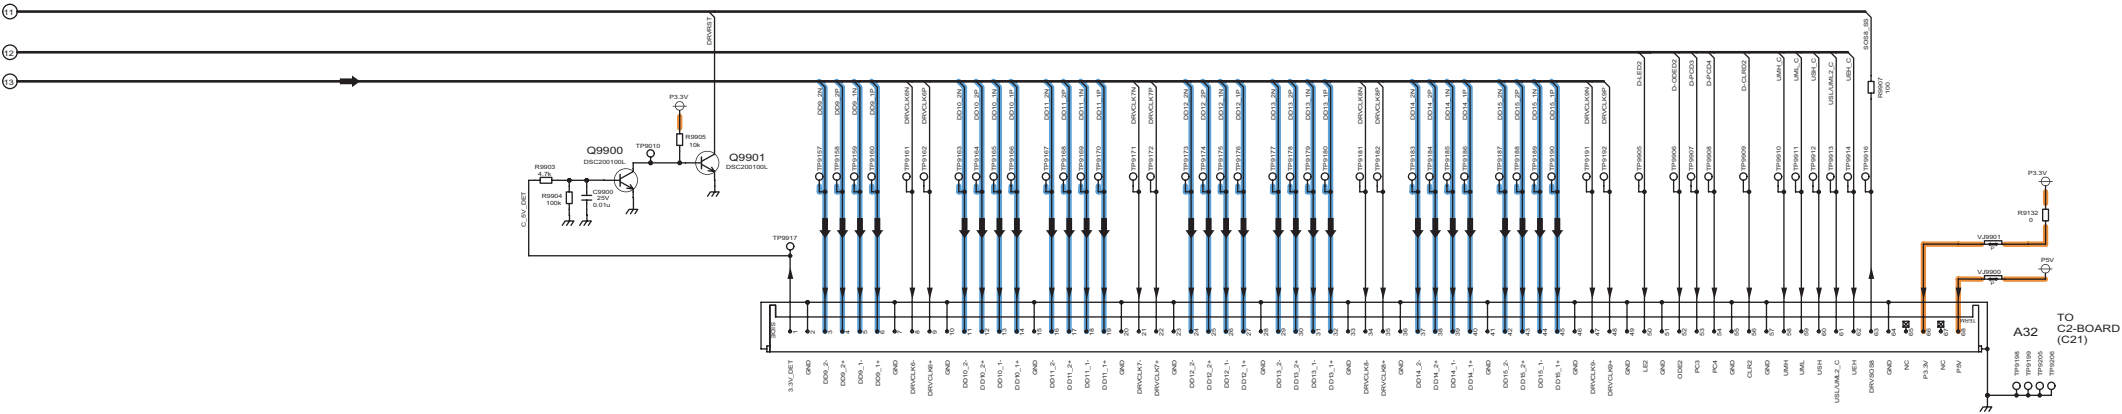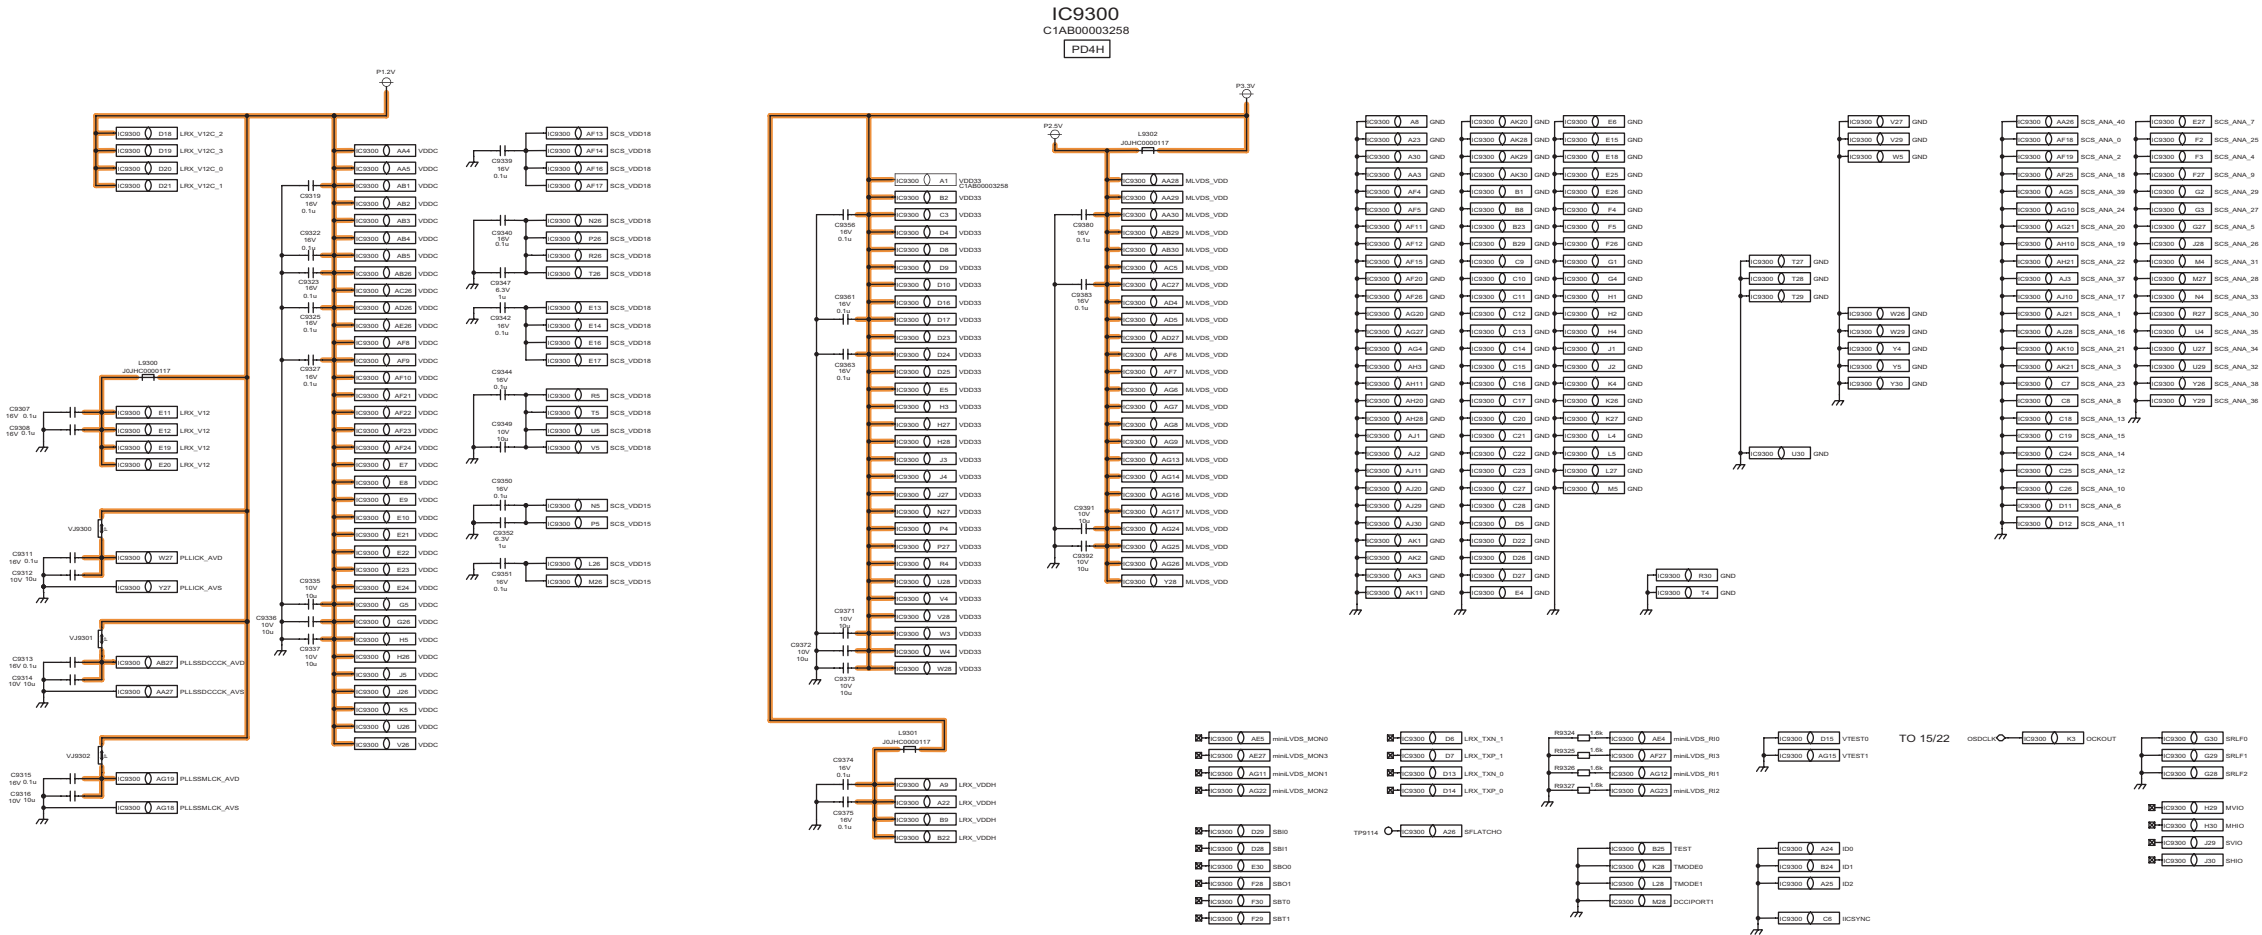

136

137

138

139

140



141

142

143

144

13.21. A-Board (17/22) Schematic Diagram

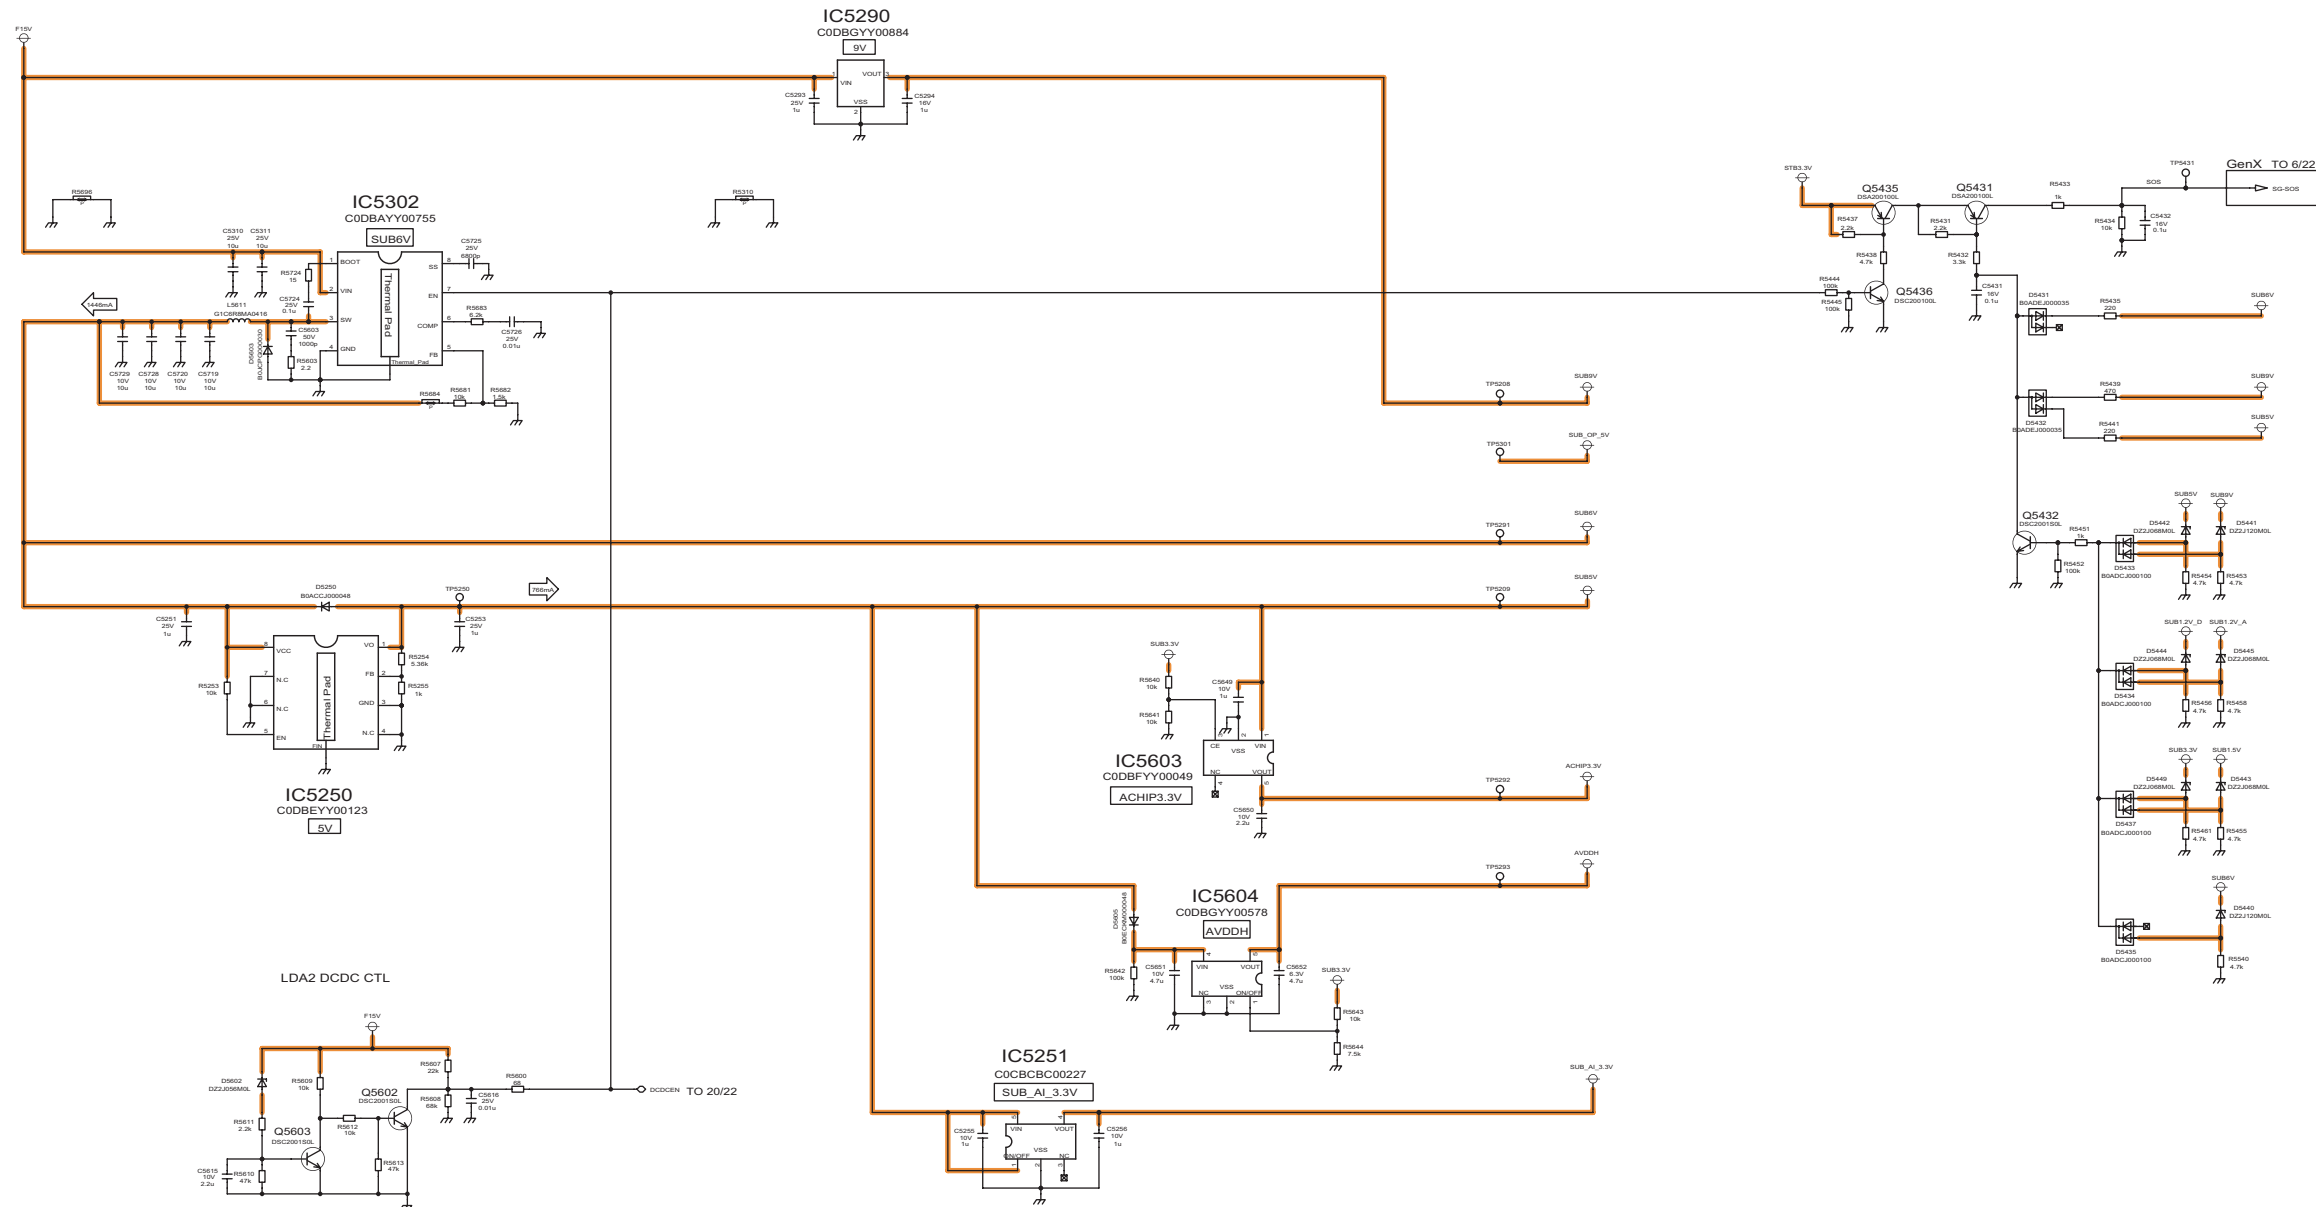

145

146

147

148

149


150








151

152


153

13.22. A-Board (18/22) and K-Board Schematic Diagram

 A-BOARD (18/22) Set-PDP

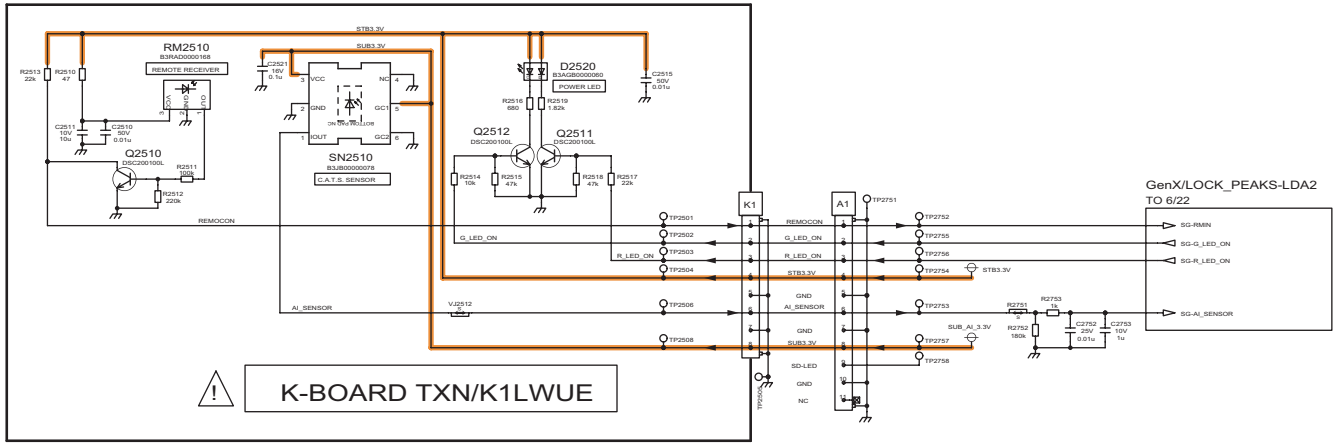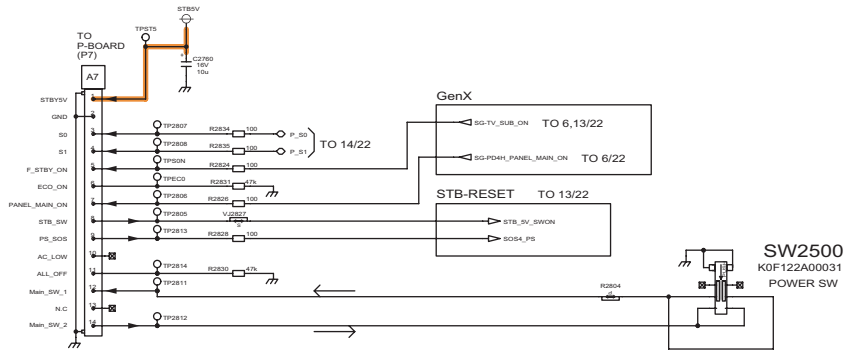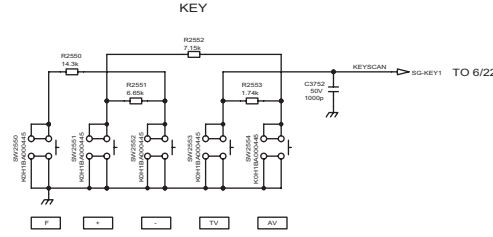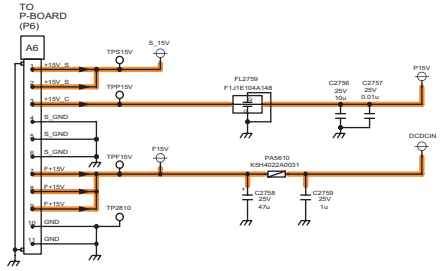
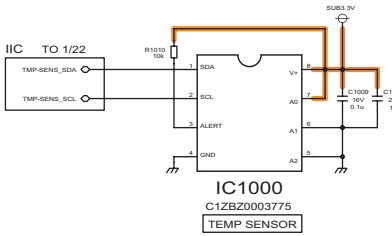
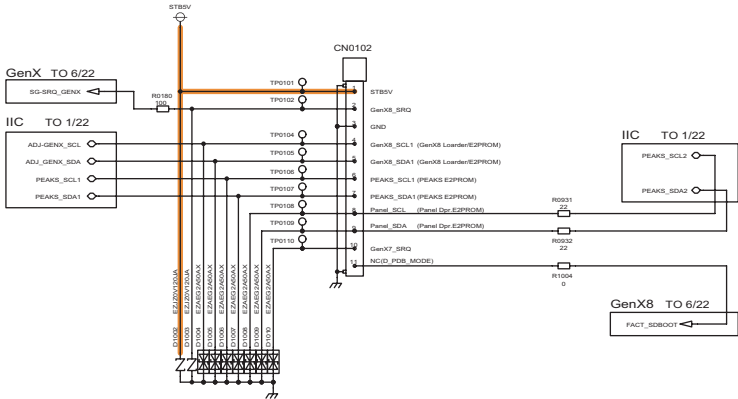


13.23. A-Board (19/22) Schematic Diagram

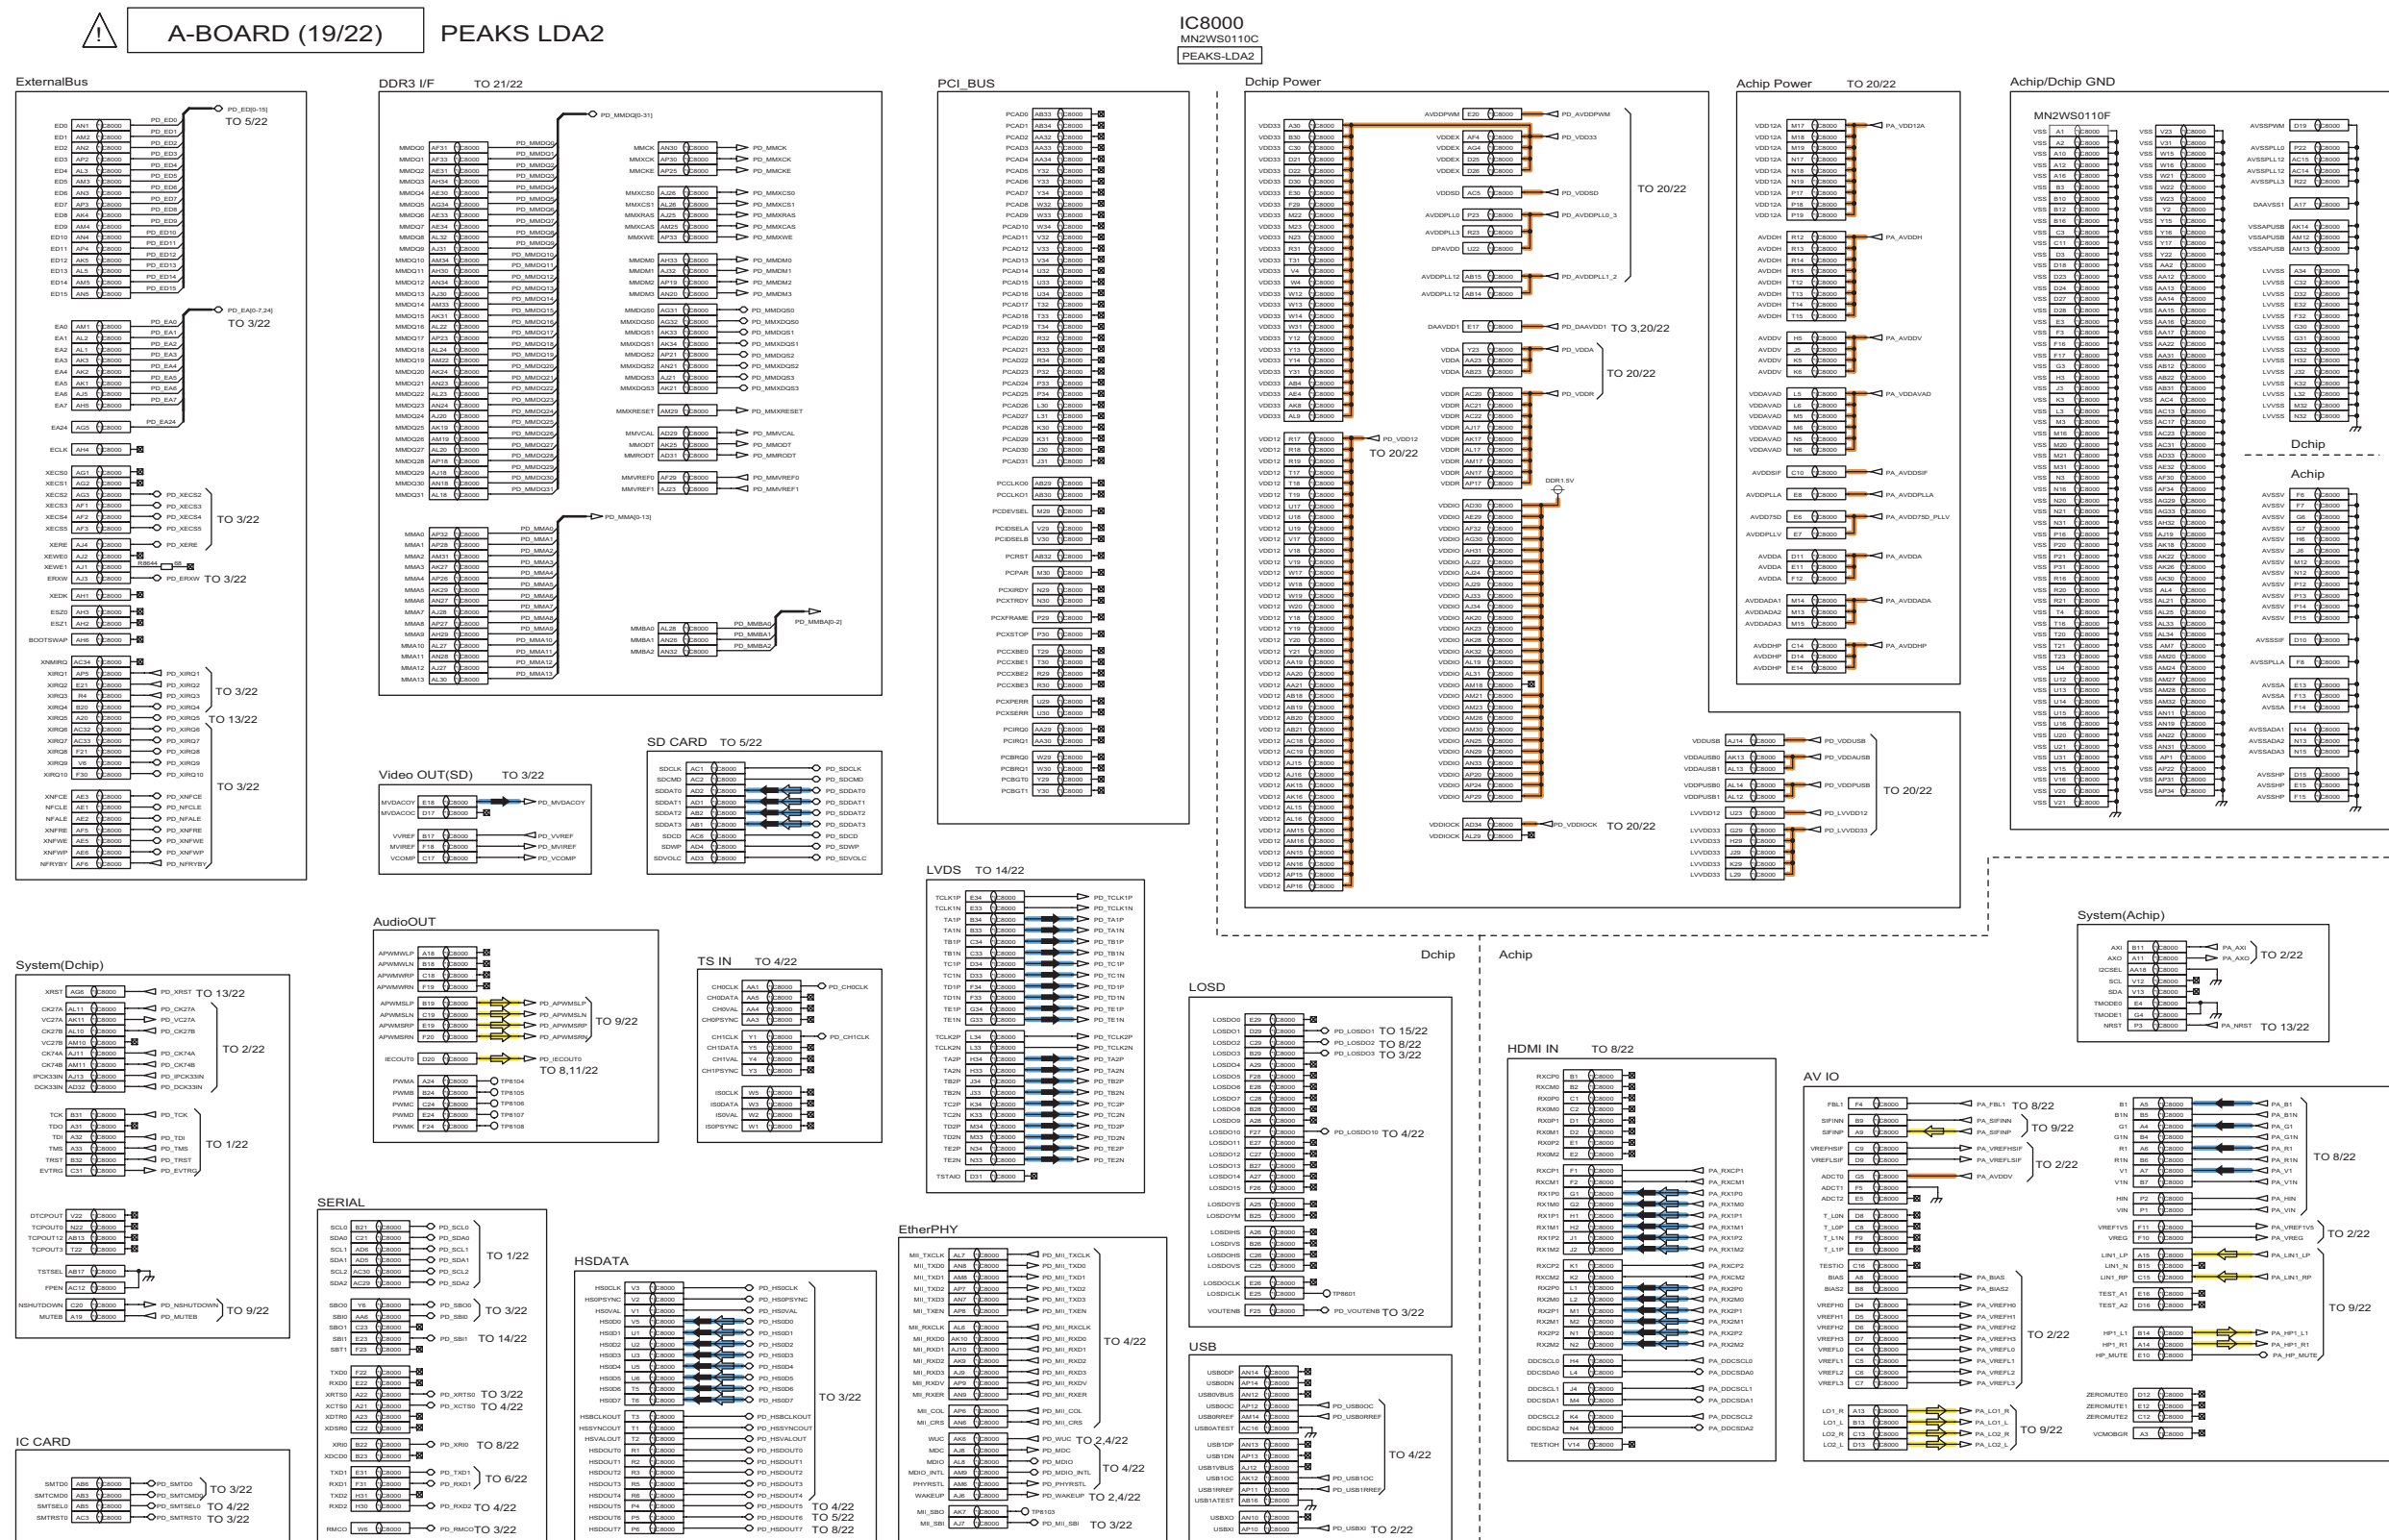

13.24. A-Board (20/22) Schematic Diagram

A-BOARD (20/22) LDA2 Power

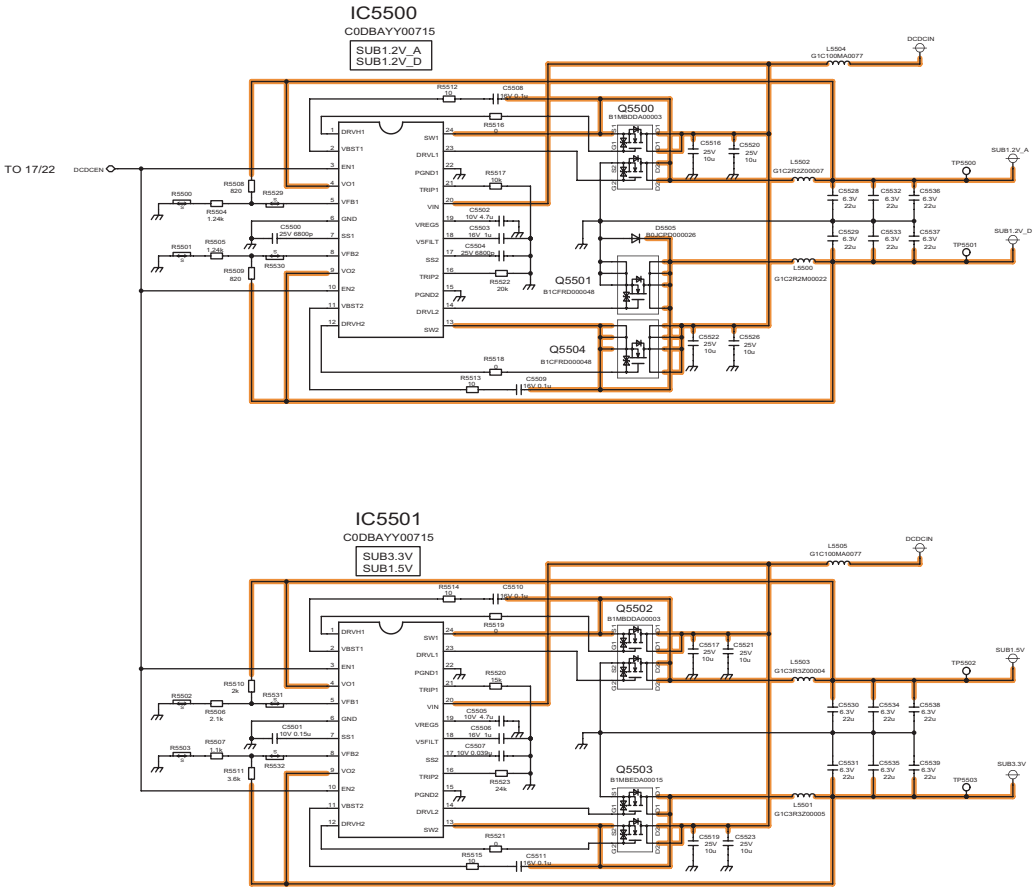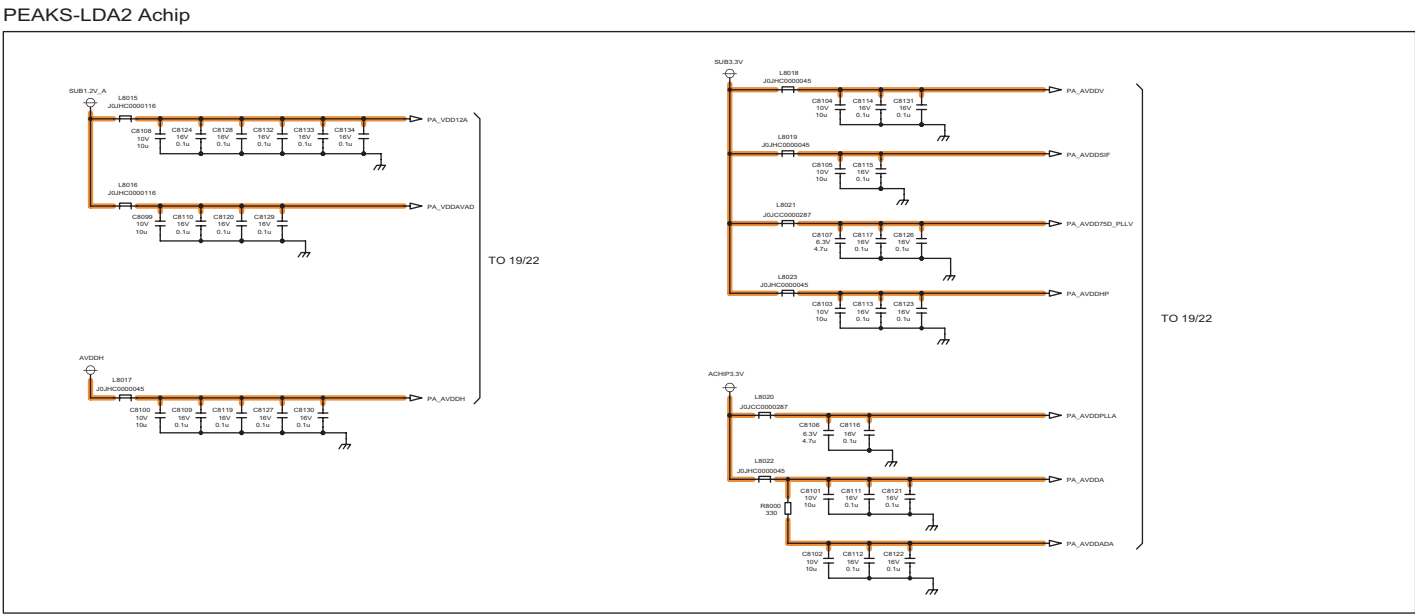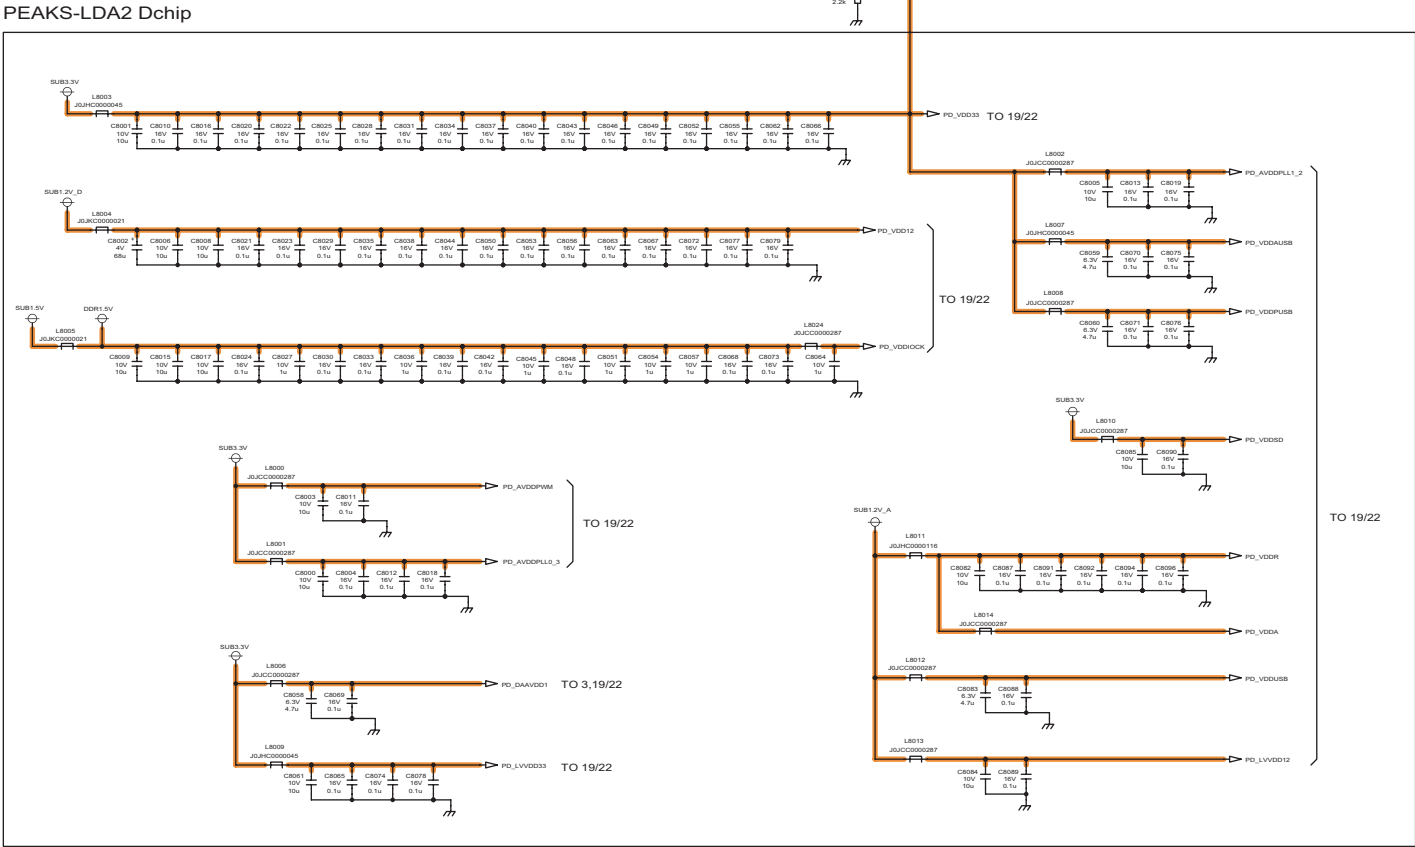

172

173

174

175

176

177

178

179


180

⚠ A-BOARD (21/22) DDR3




13.26. A-Board (22/22) Schematic Diagram

⚠ A-BOARD (22/22) OFDM

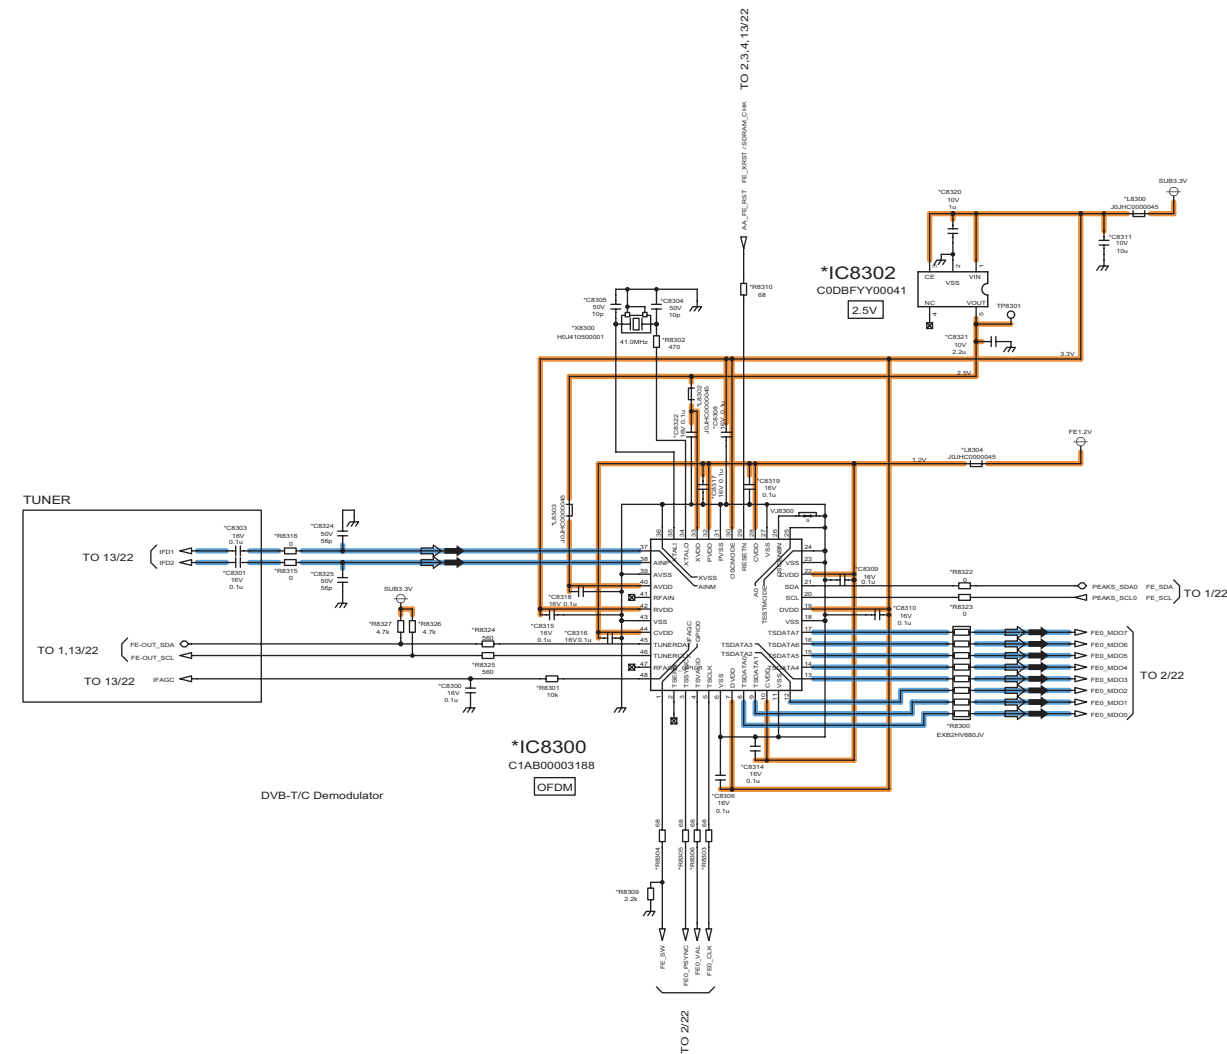


13.27. XW-Board Schematic Diagram


! XW-BOARD TXNXW1LHUB

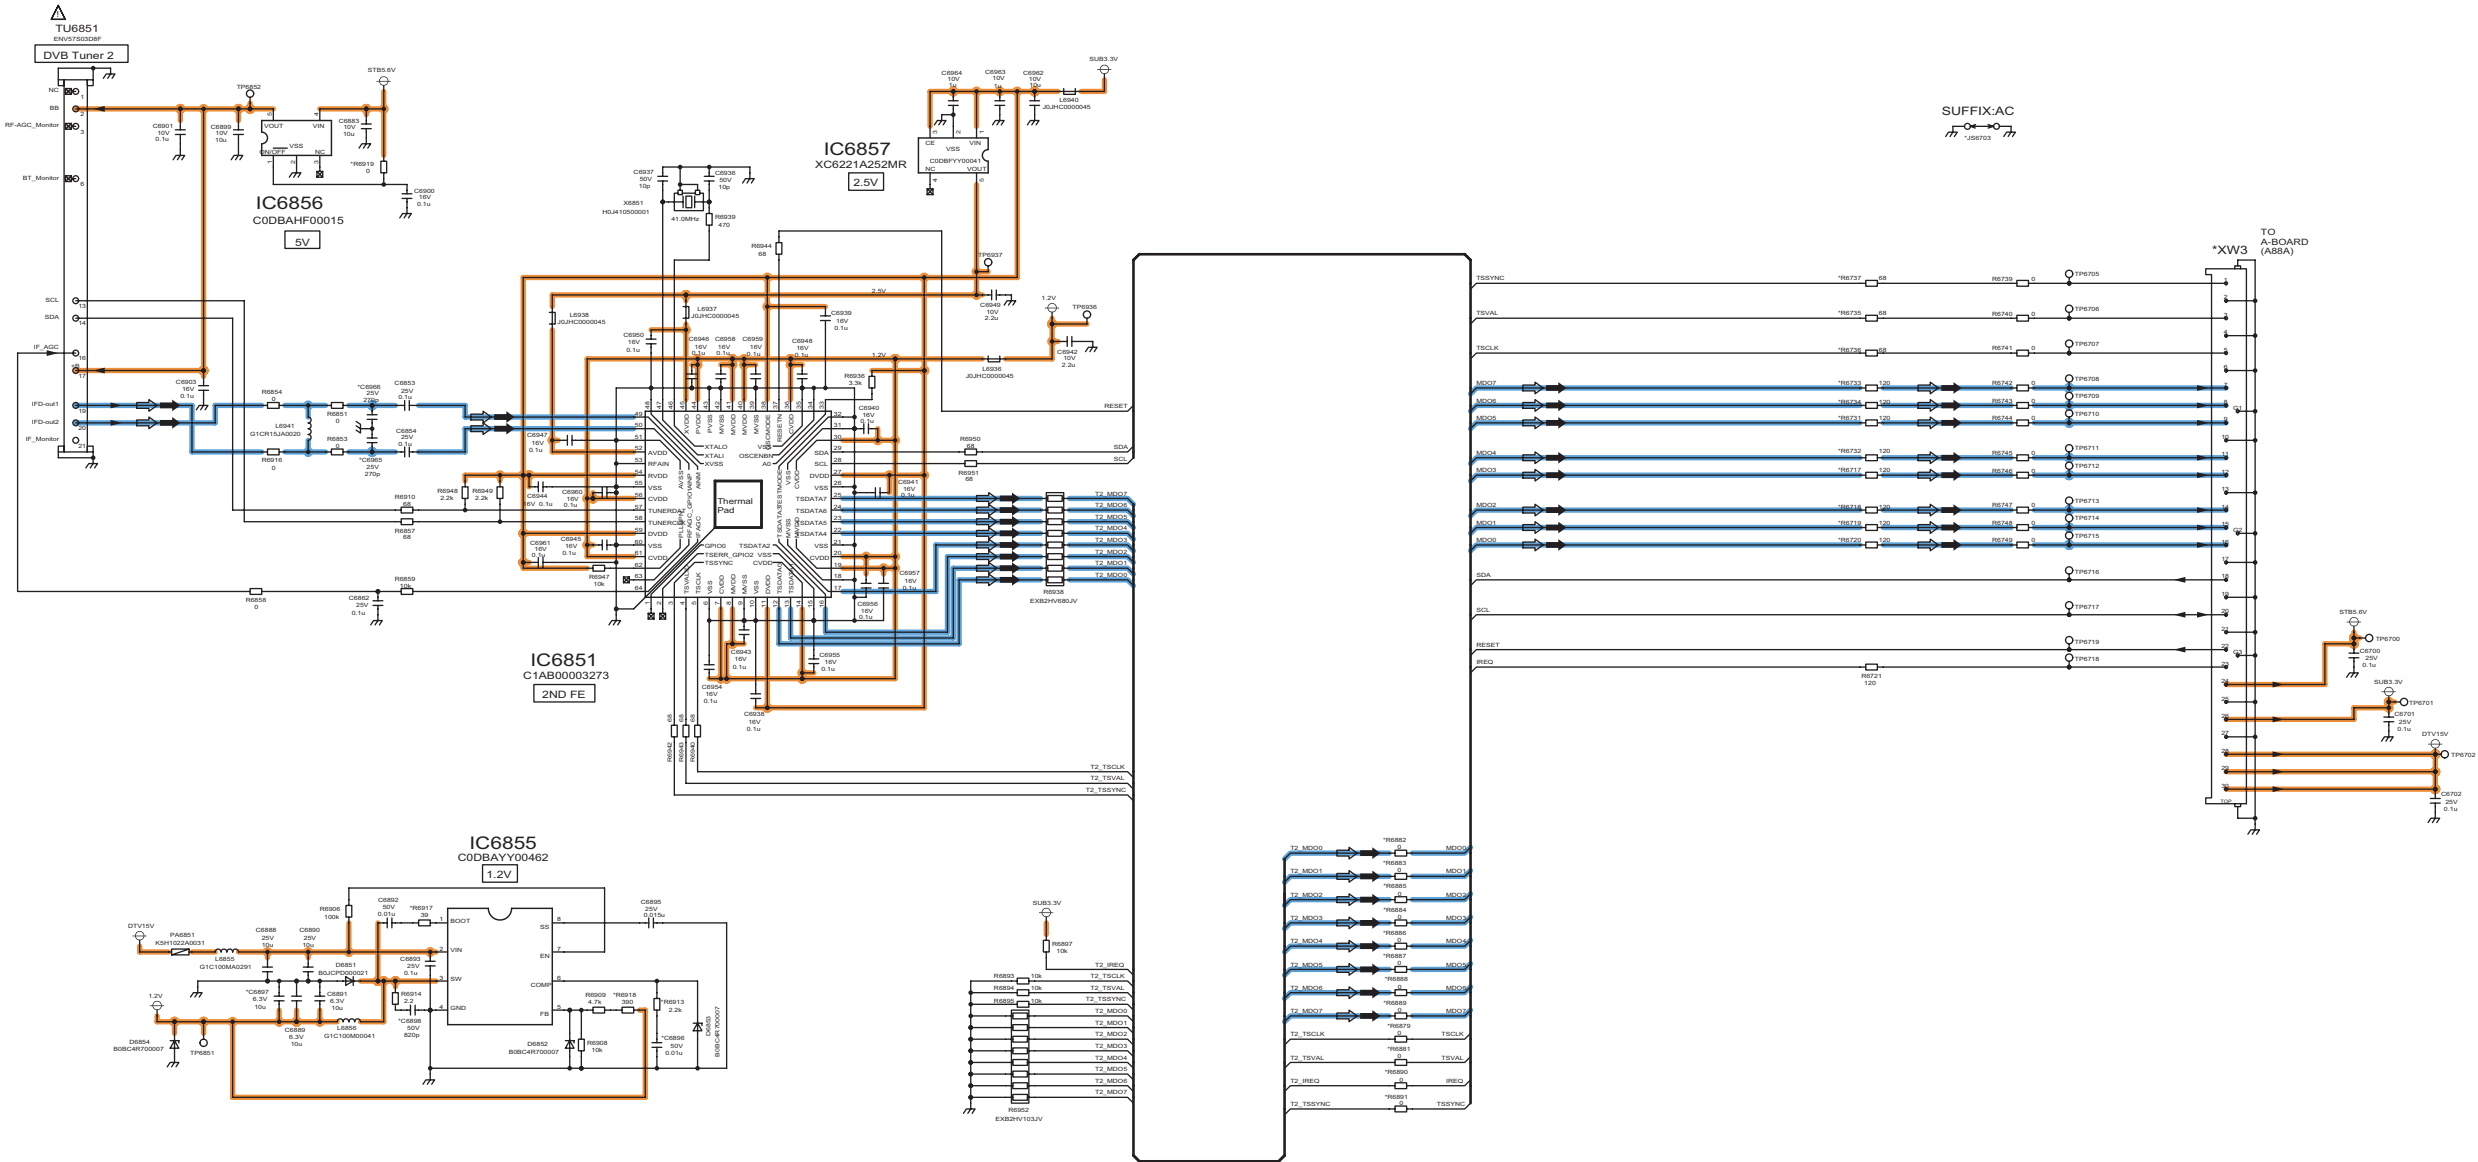


13.28. C1-Board Schematic Diagram

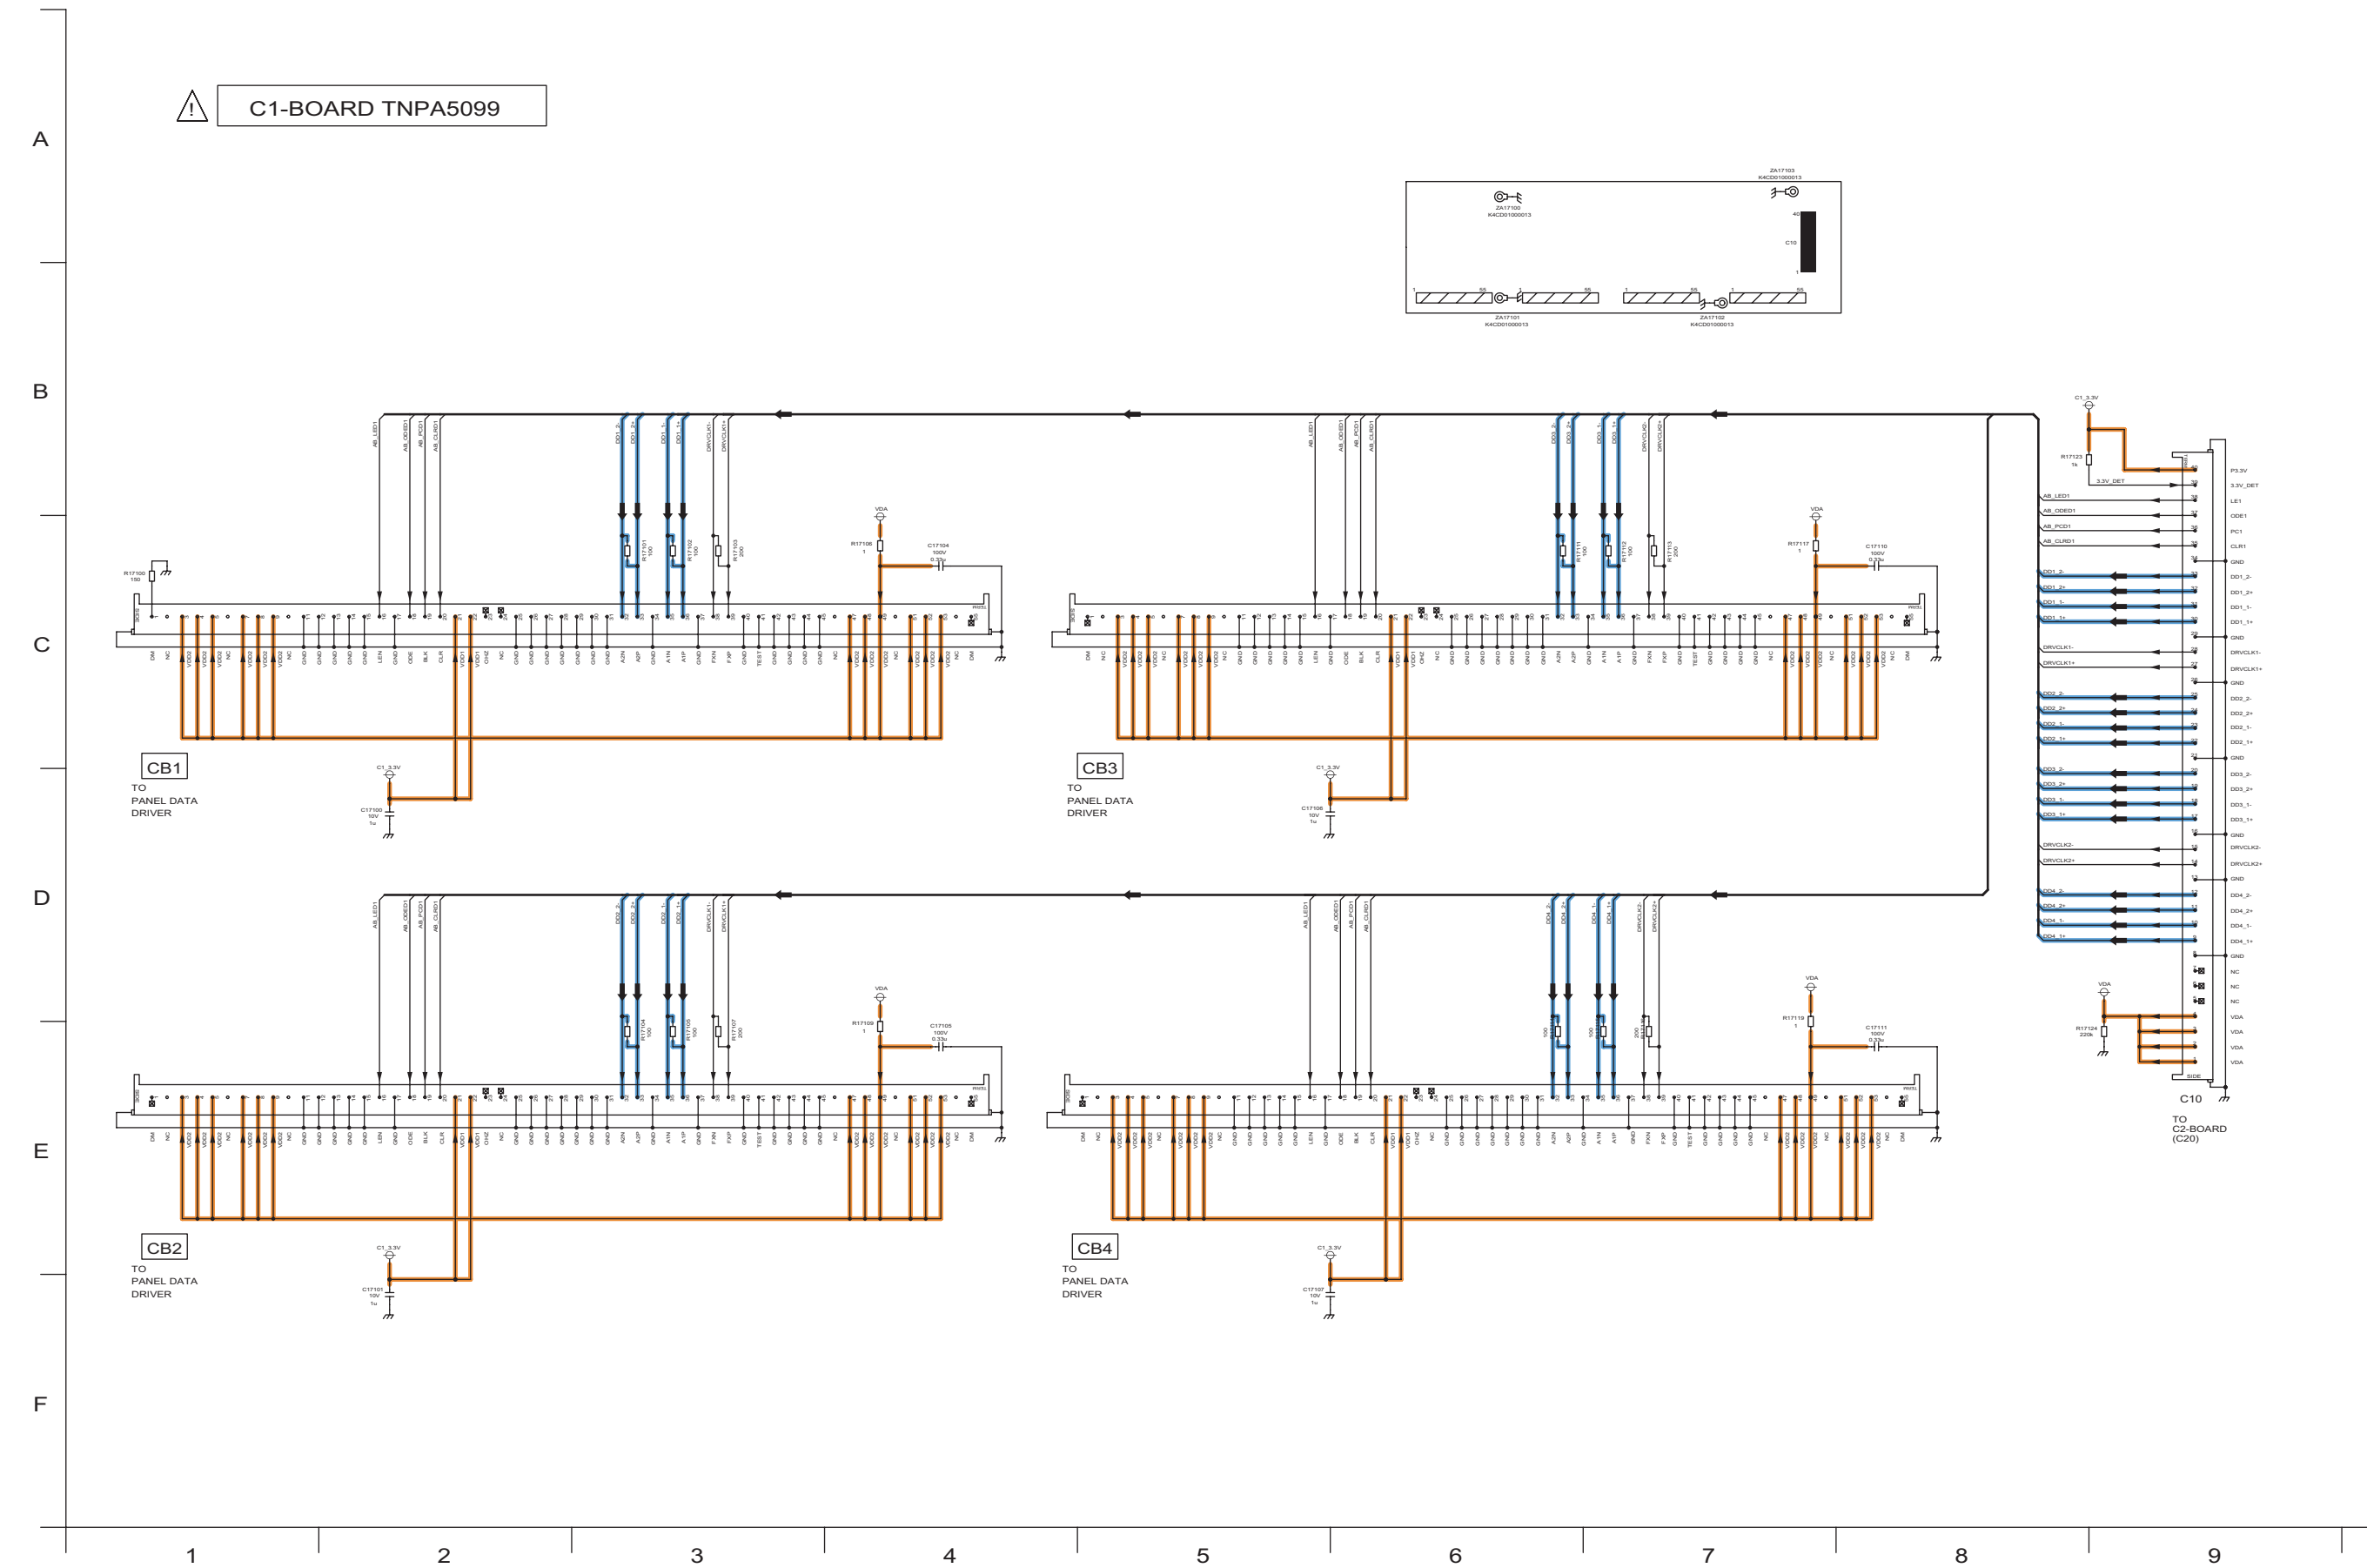


13.29. C2-Board (1/2) Schematic Diagram

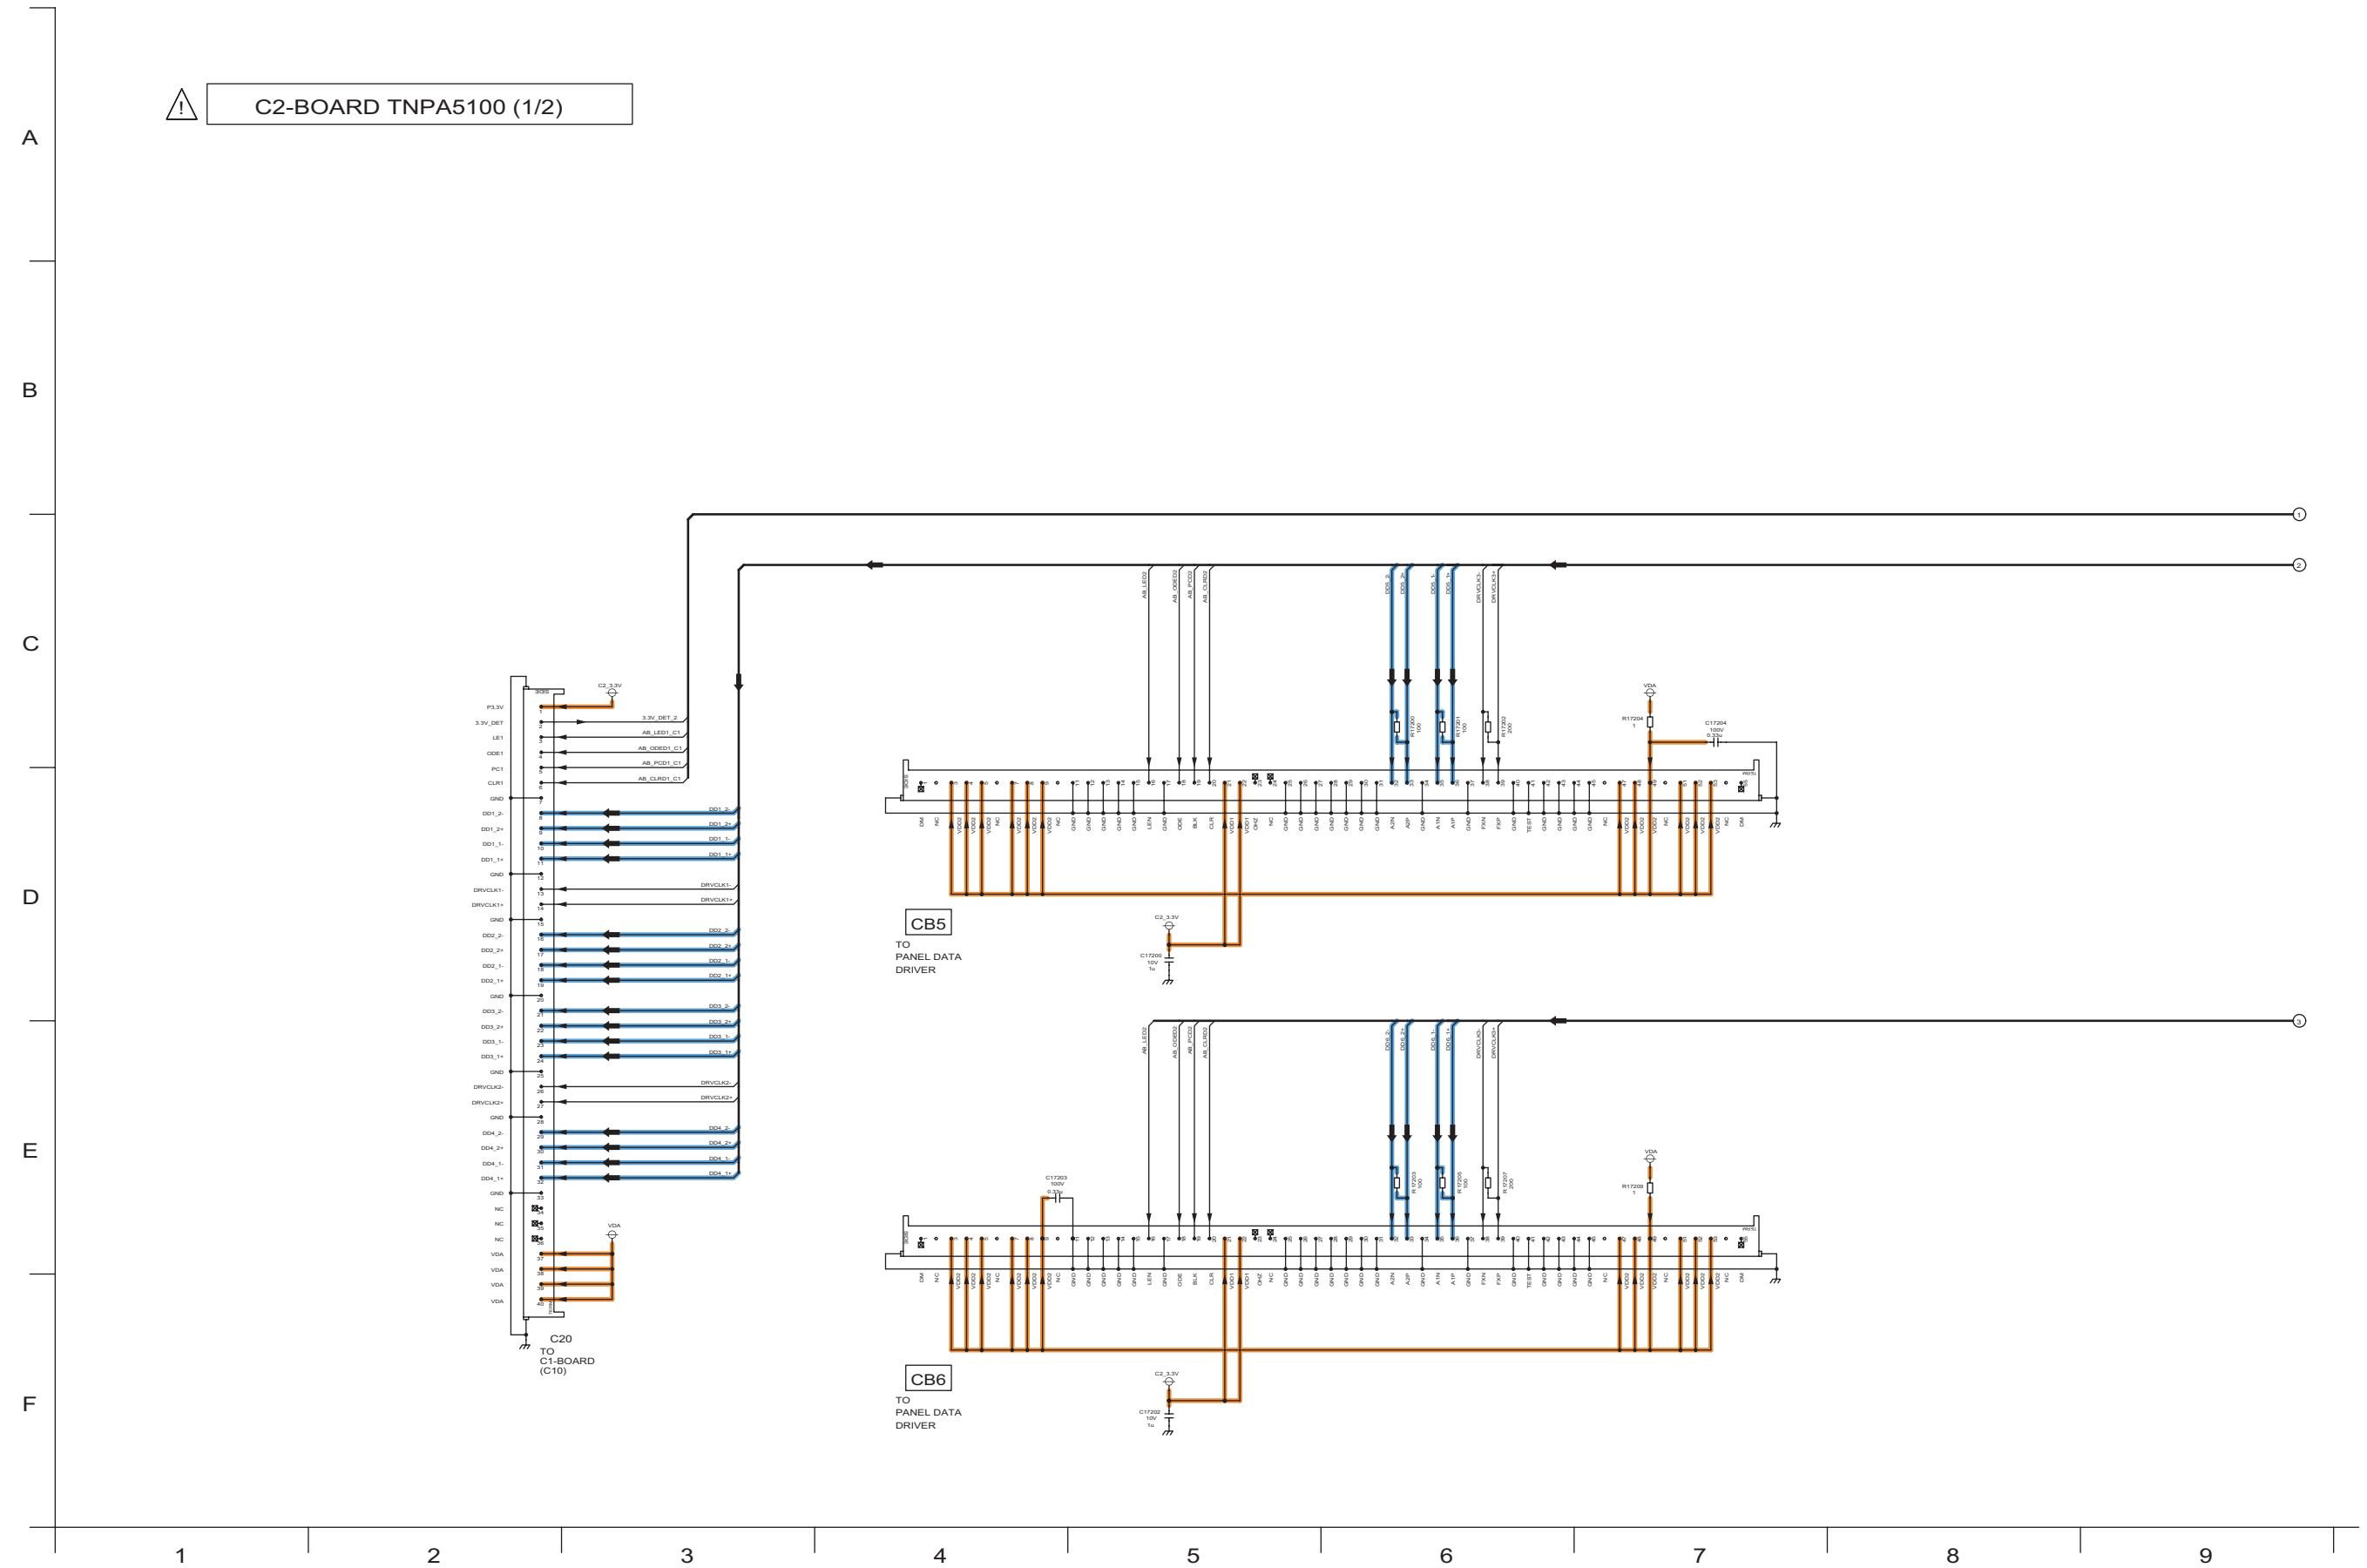


13.30. C2-Board (2/2) Schematic Diagram

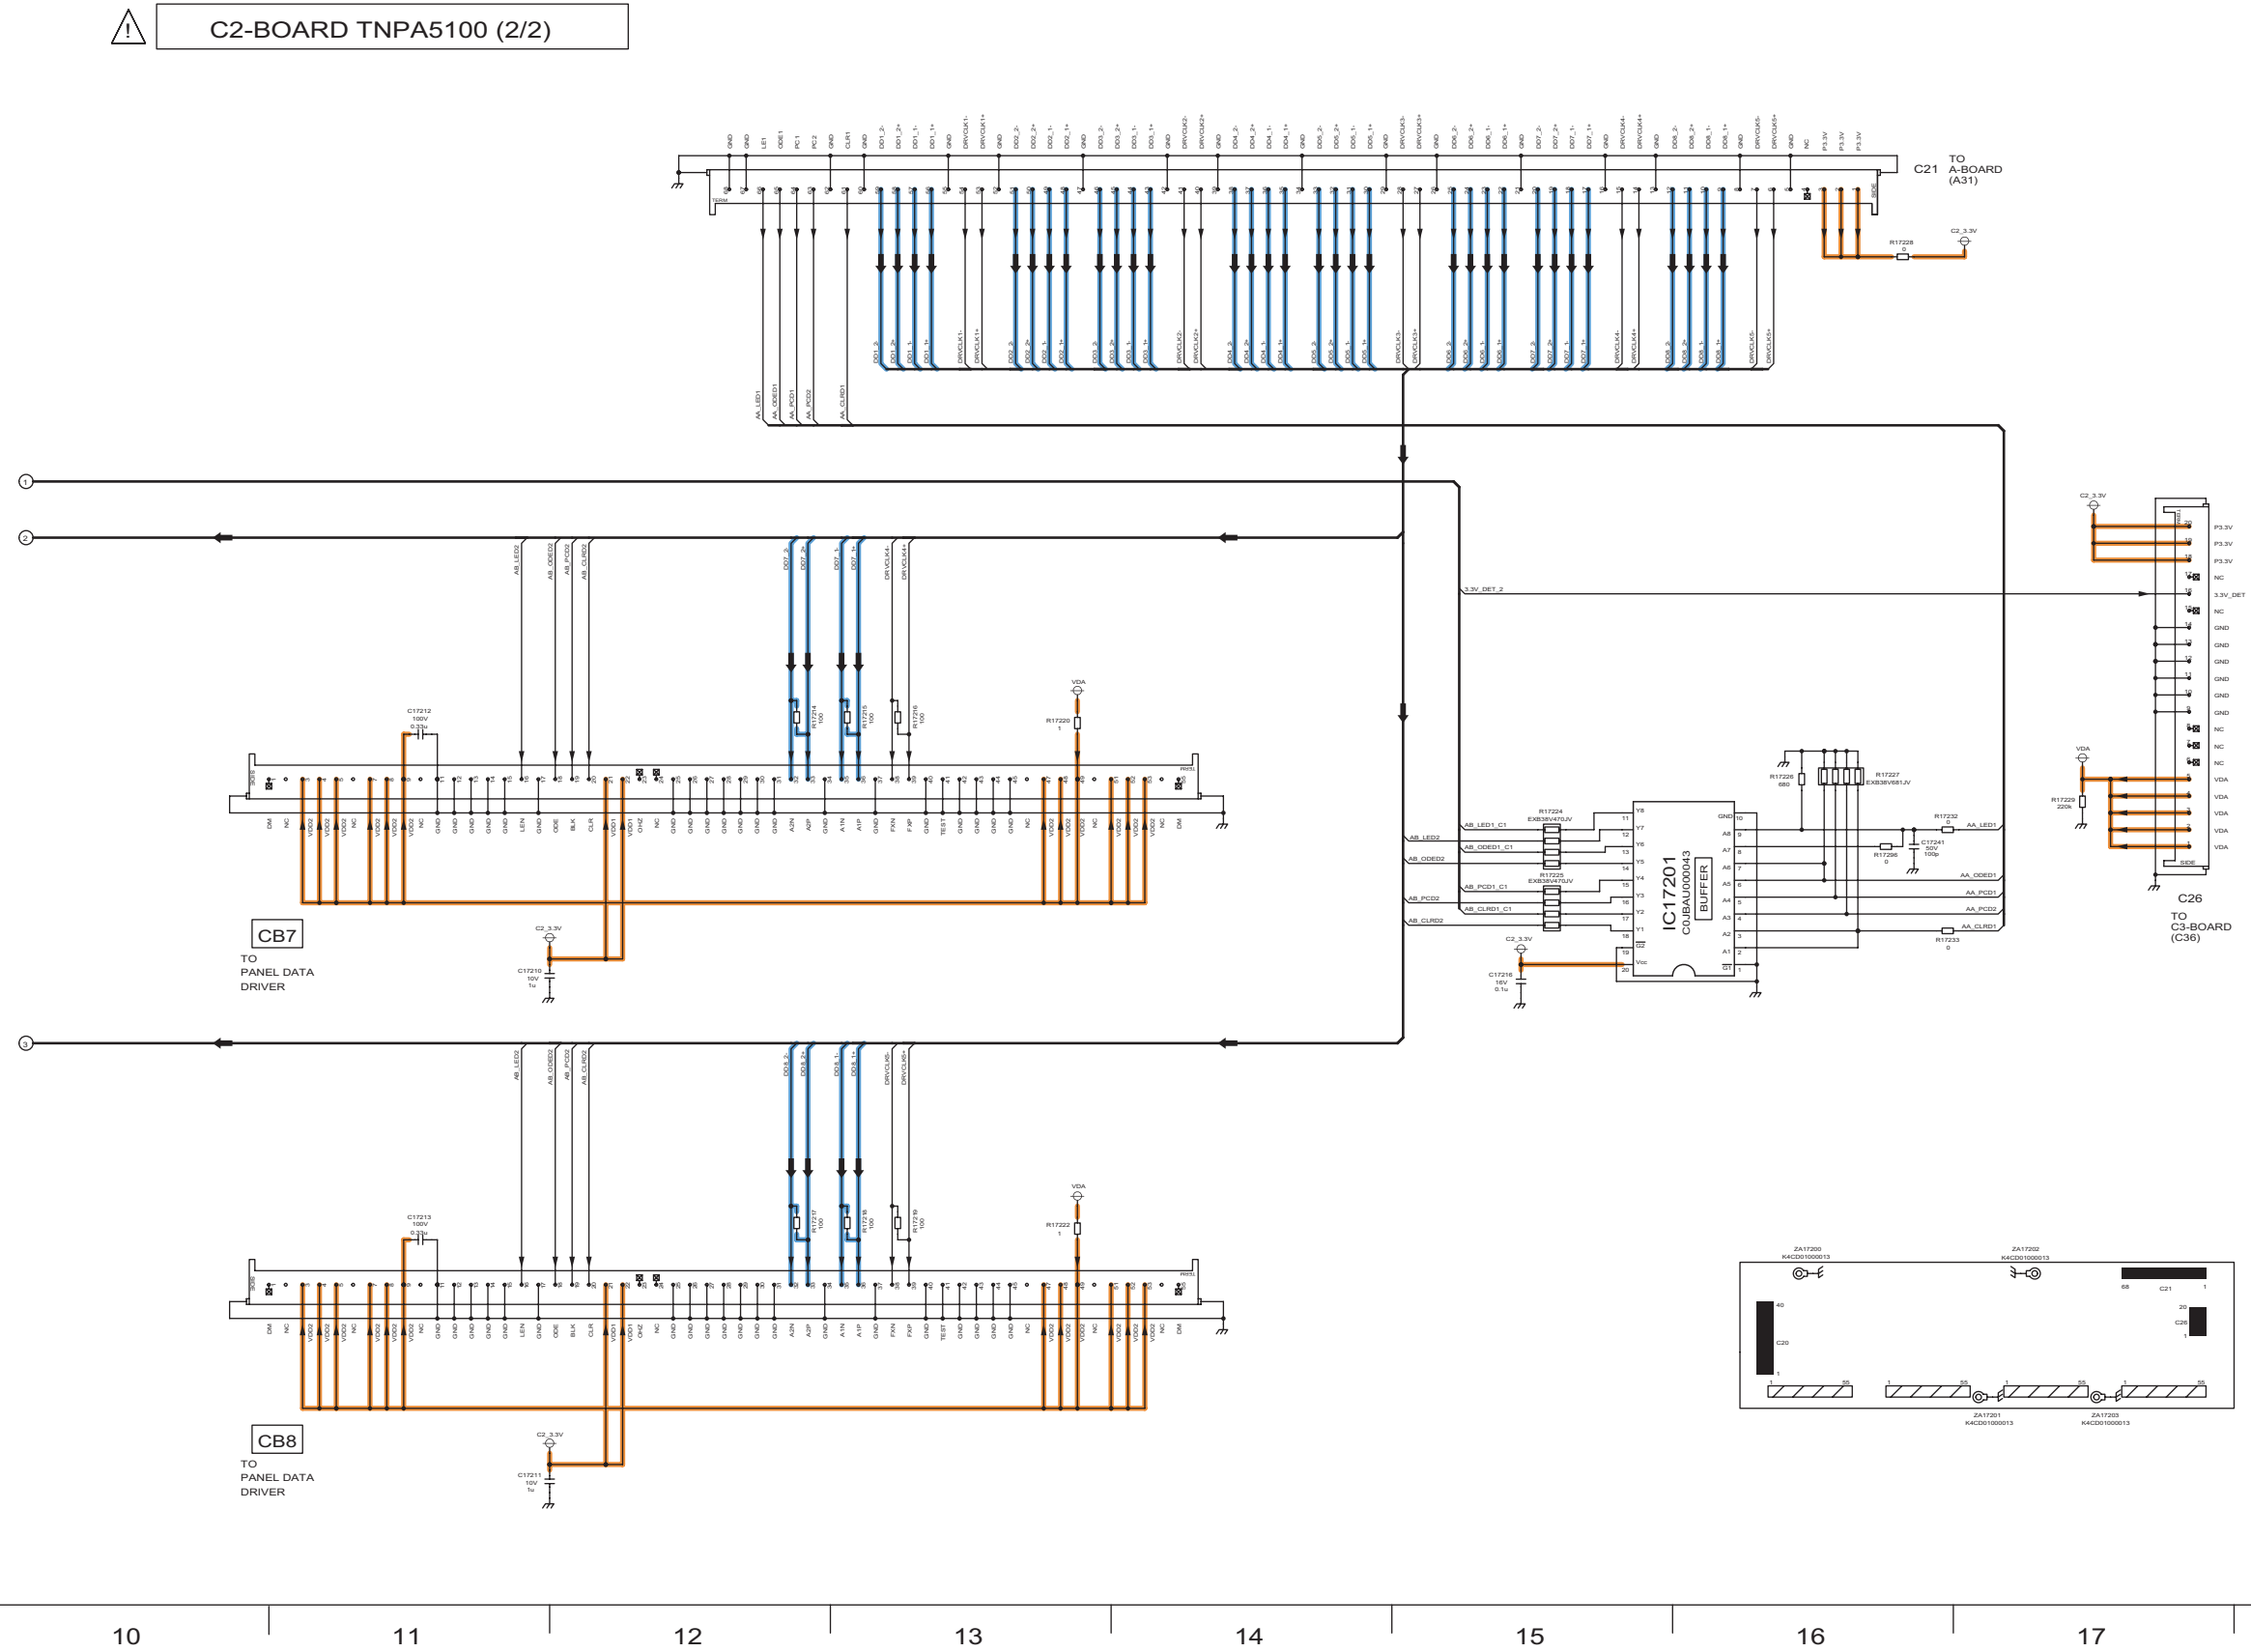


13.31. C3-Board (1/2) Schematic Diagram

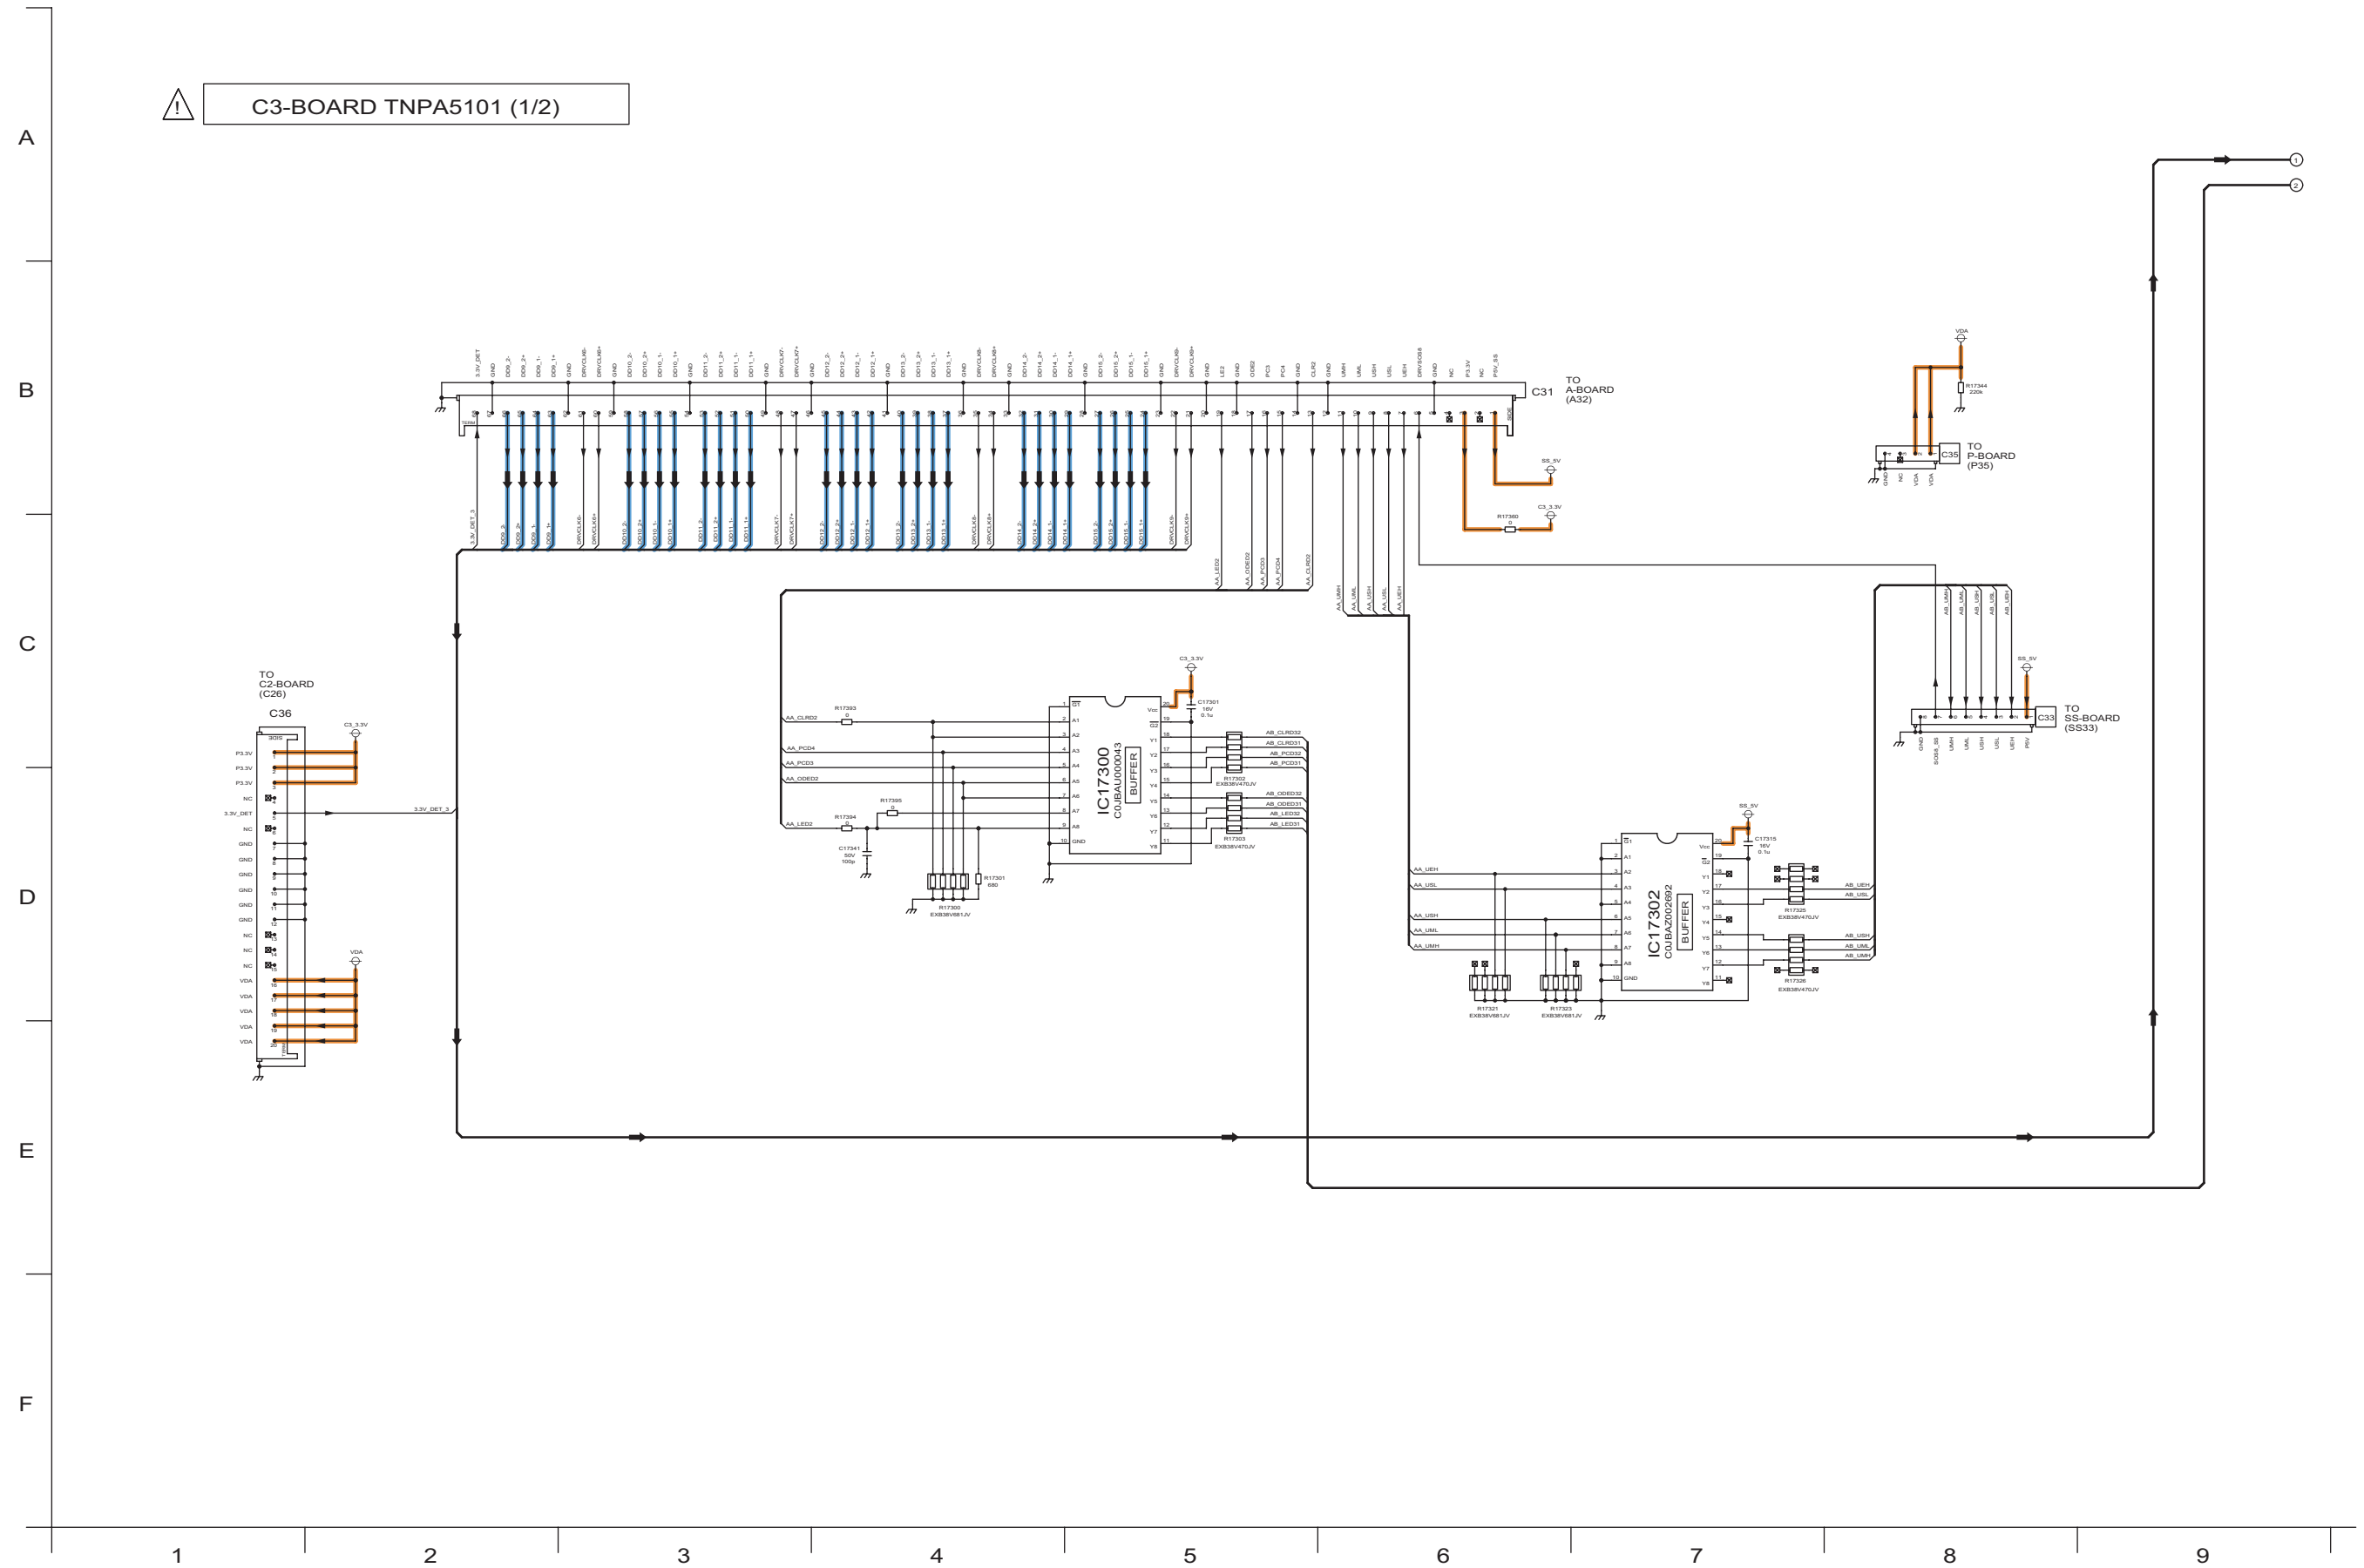


13.32. C3-Board (2/2) Schematic Diagram

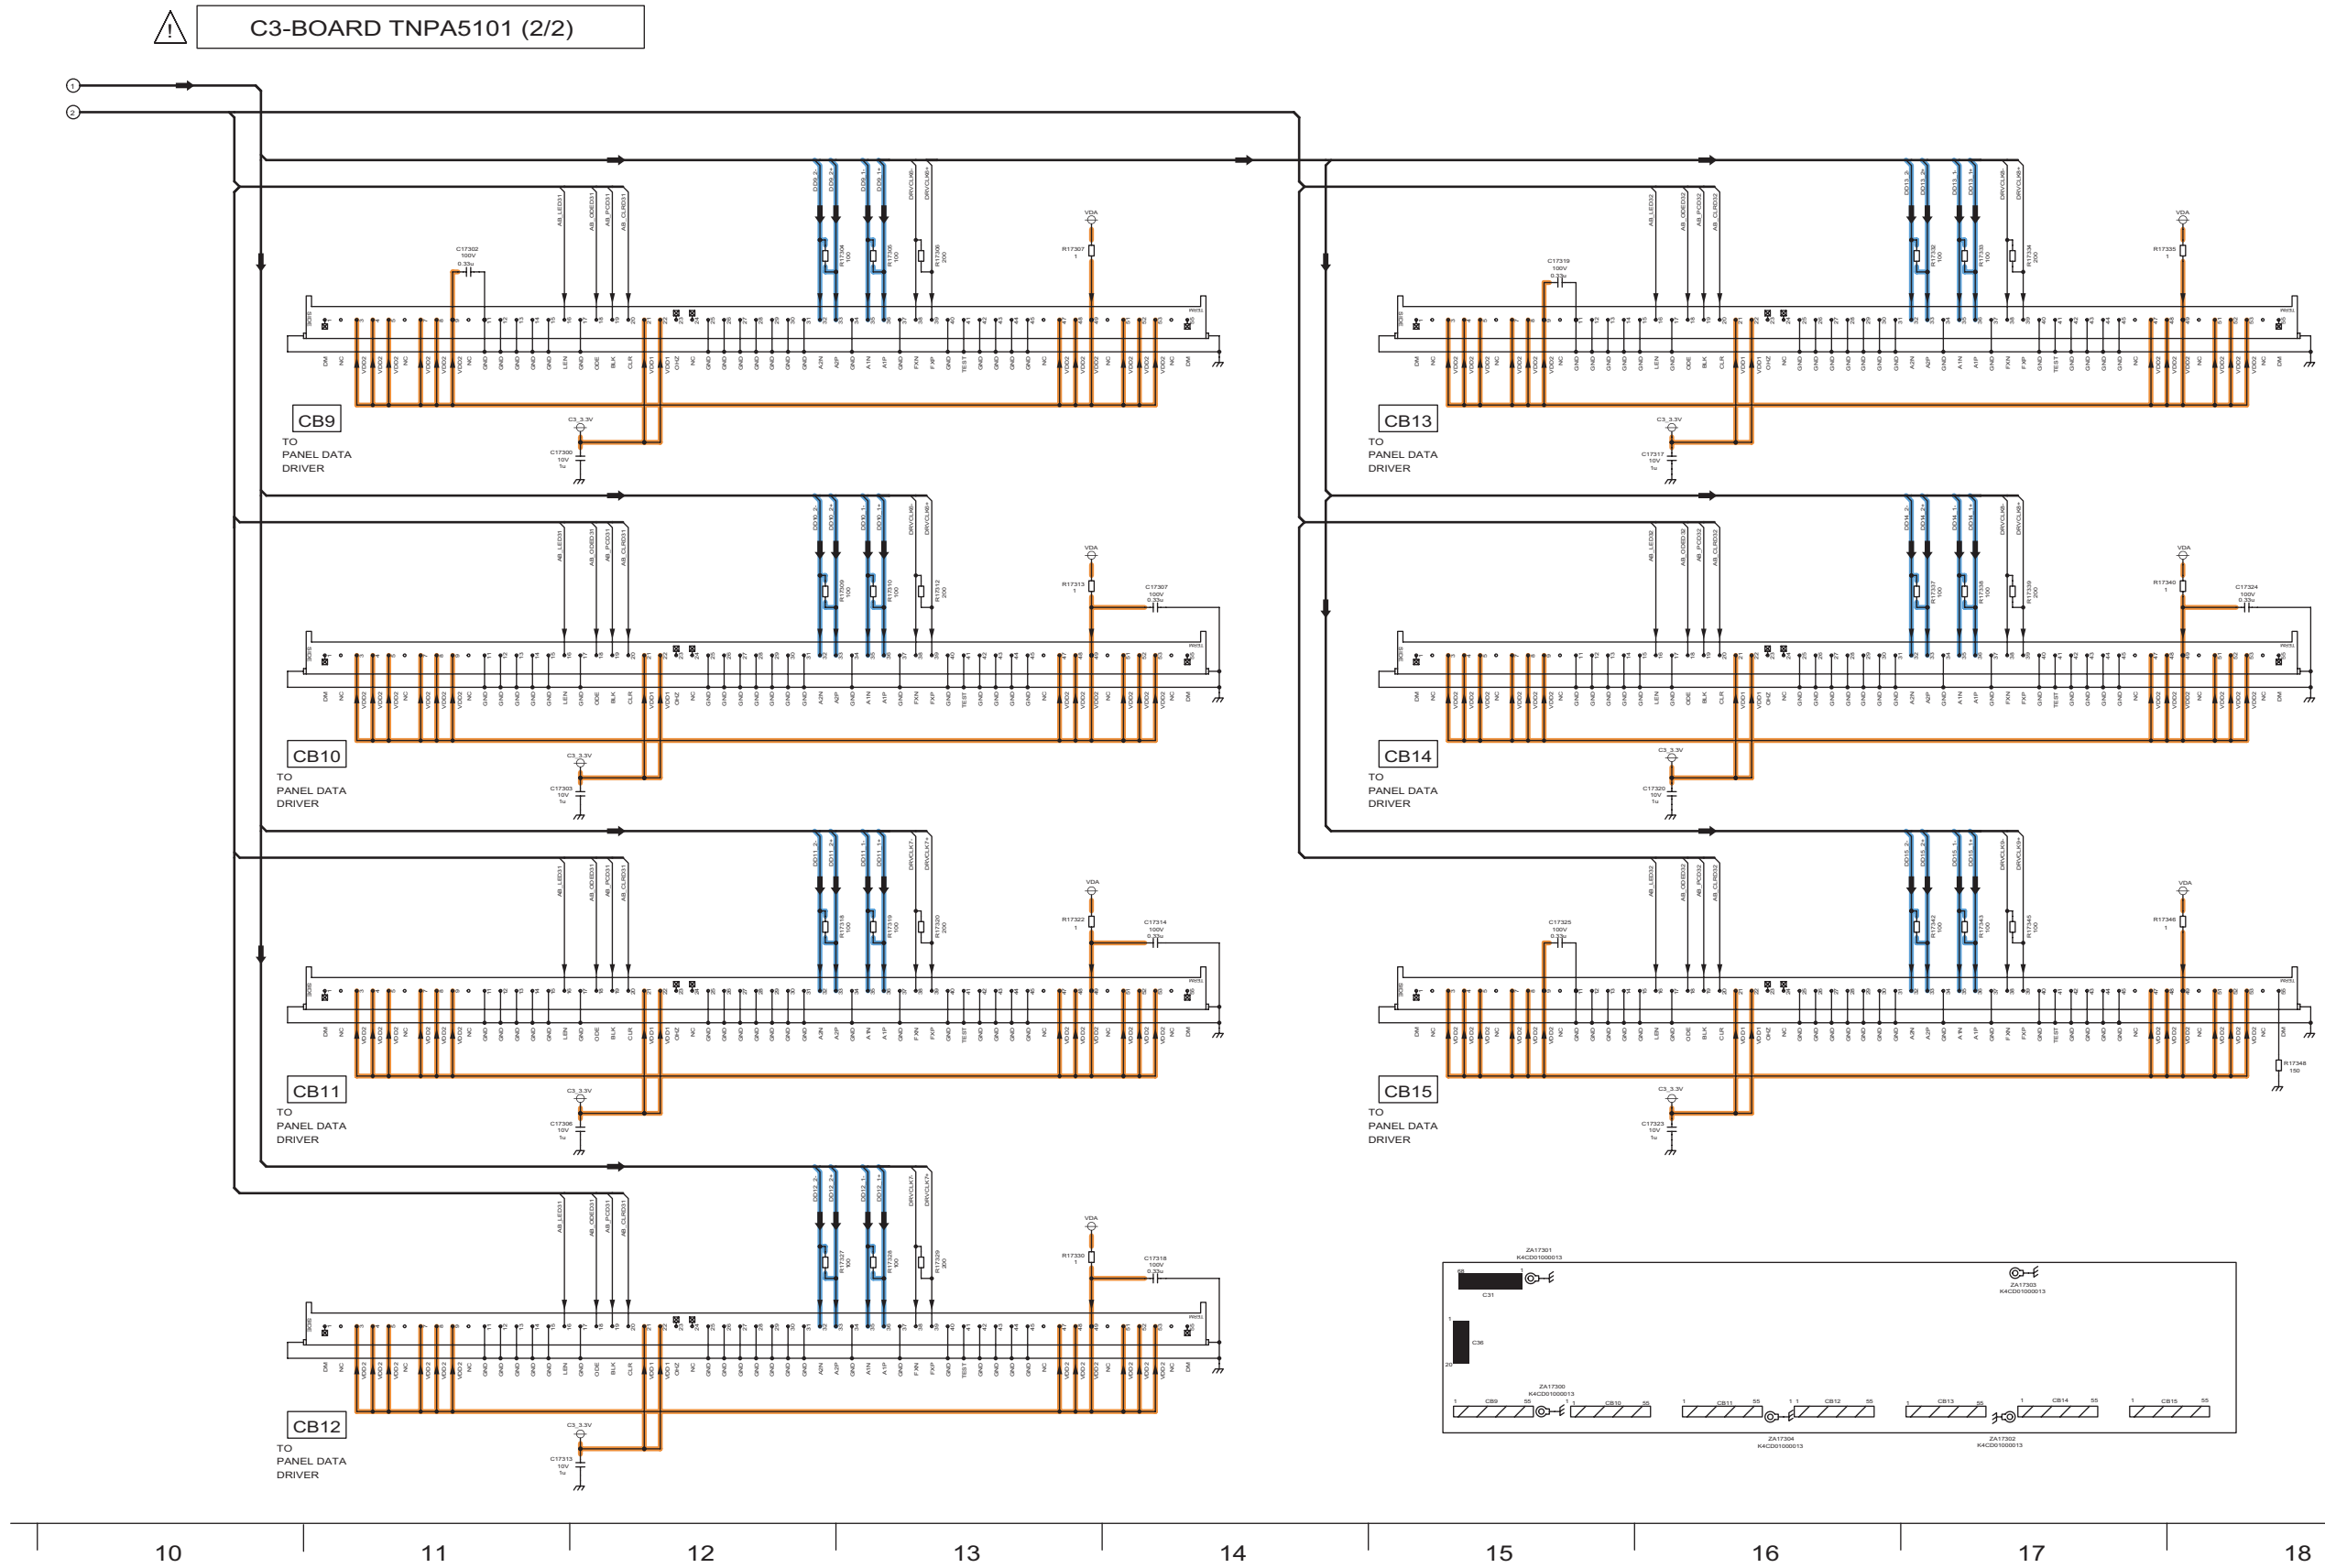


13.33. SC-Board (1/4) Schematic Diagram

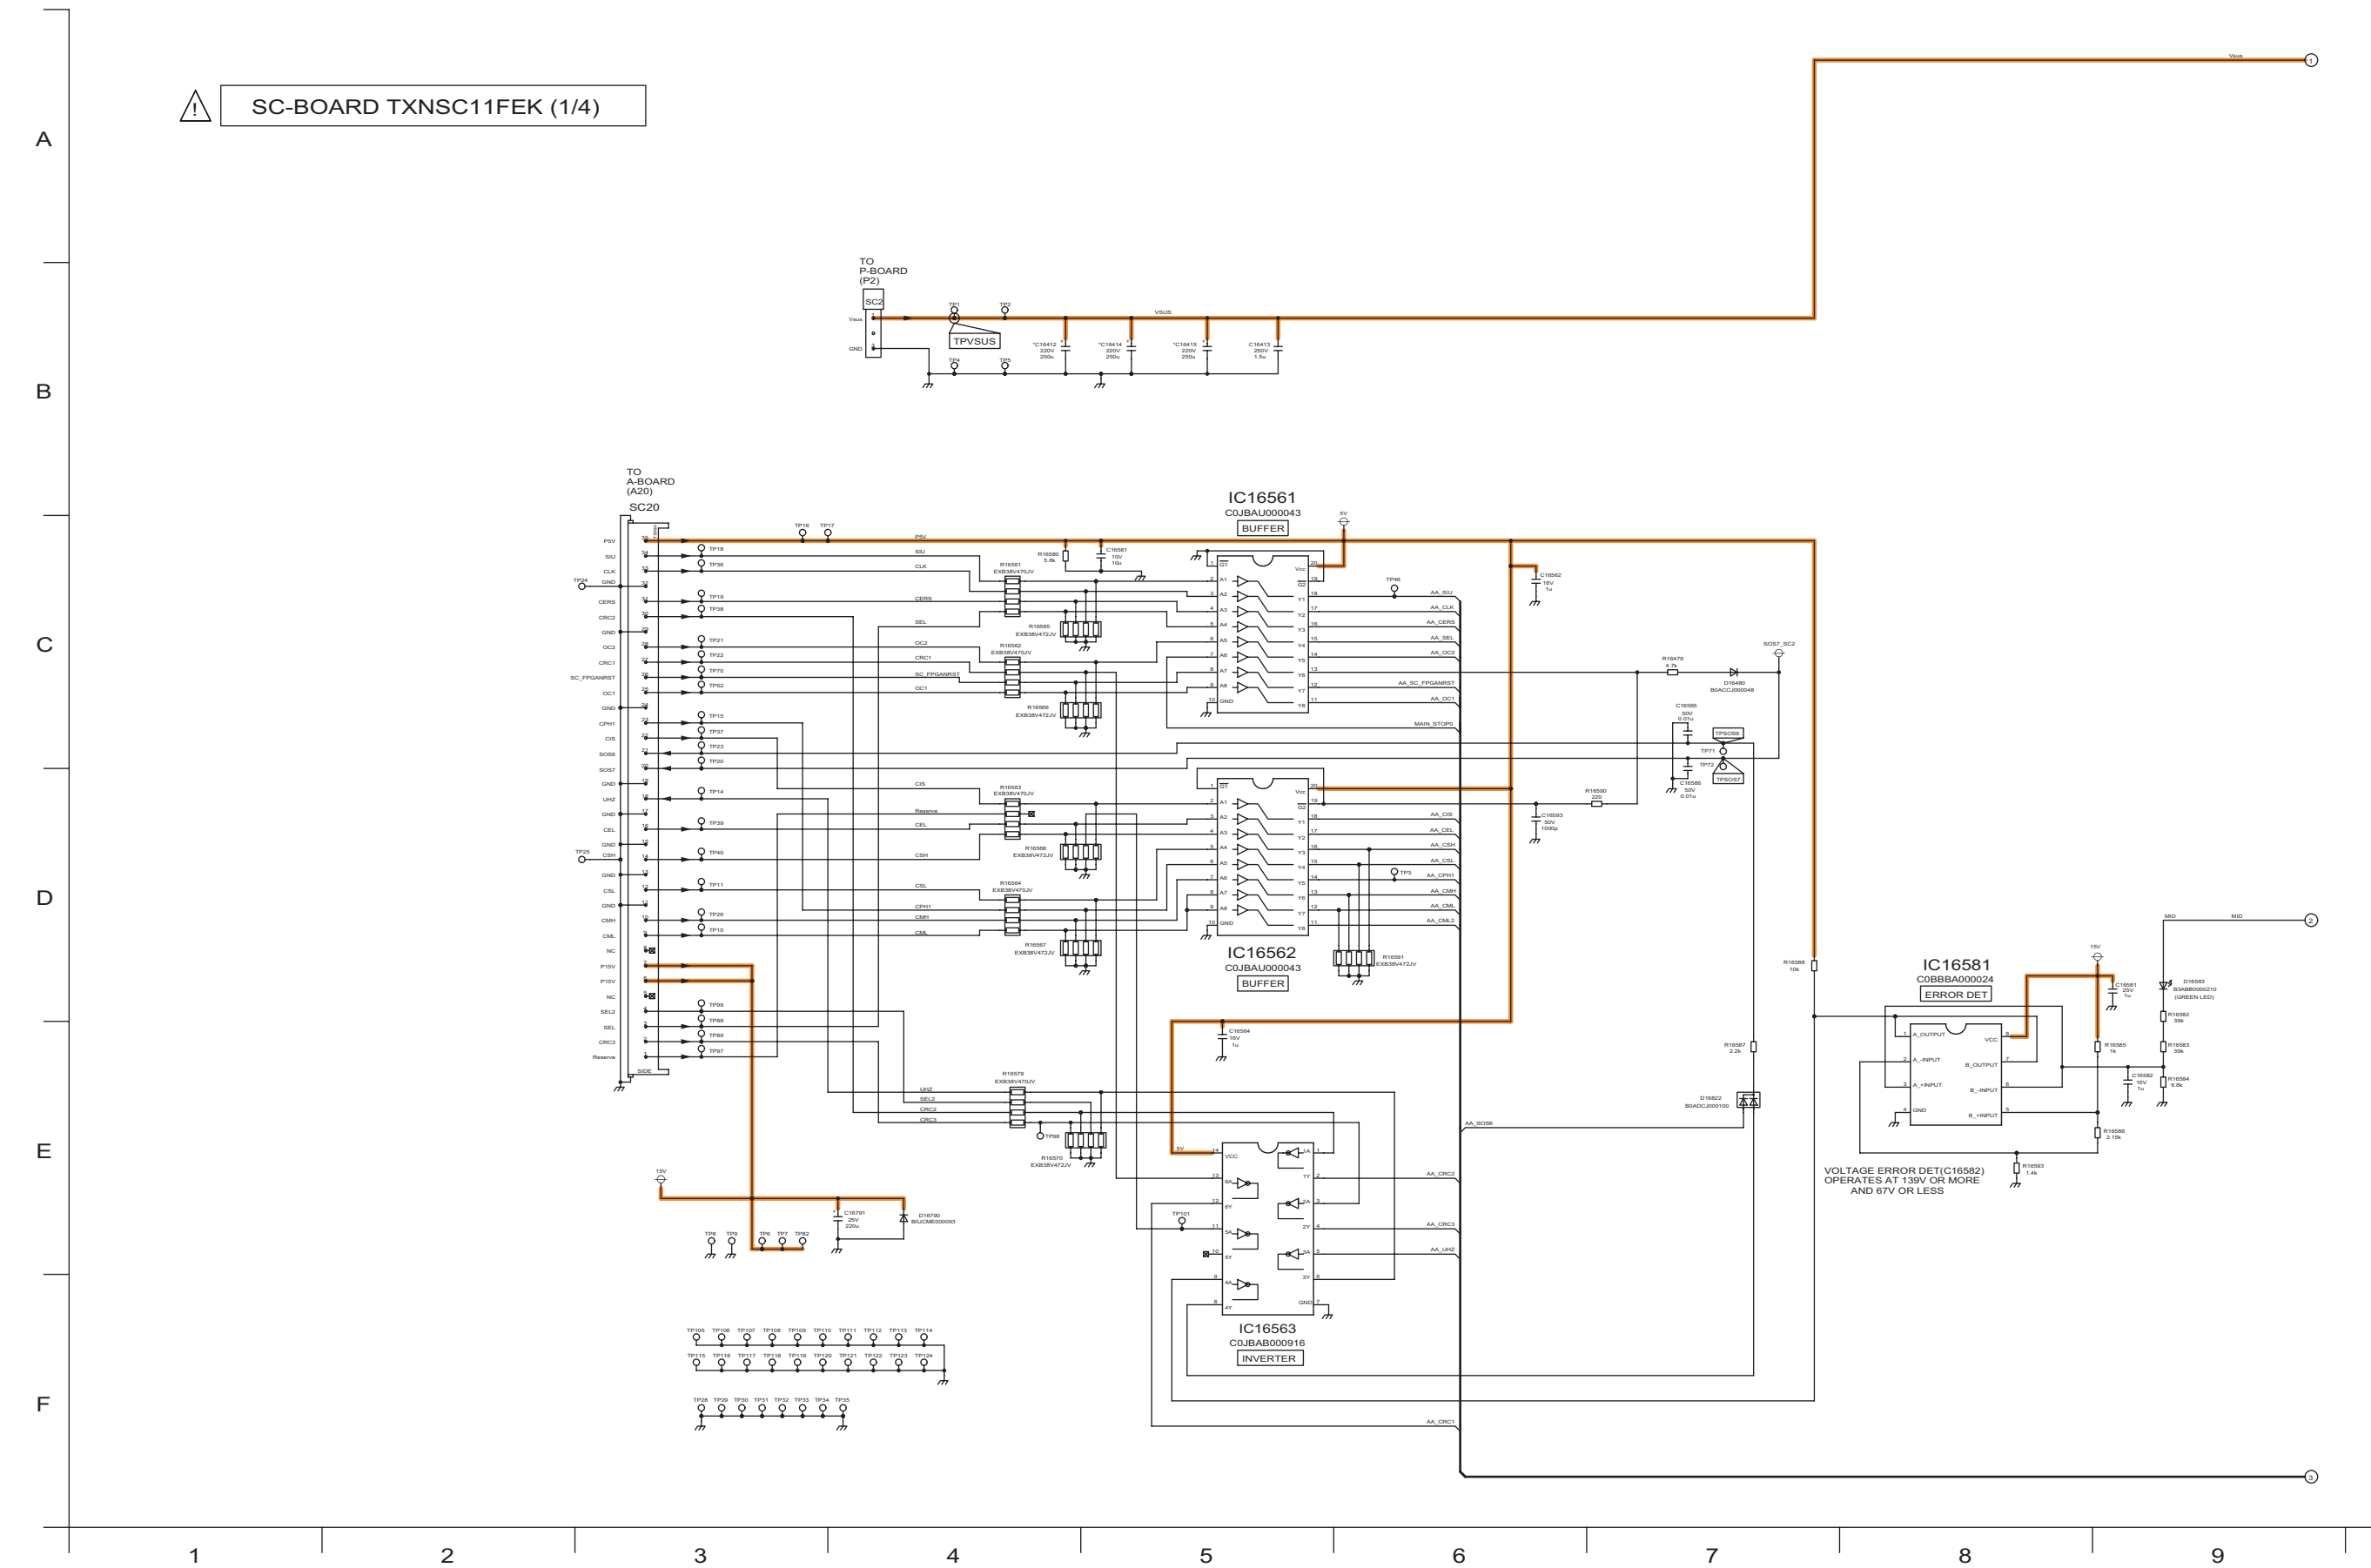


13.34. SC-Board (2/4) Schematic Diagram

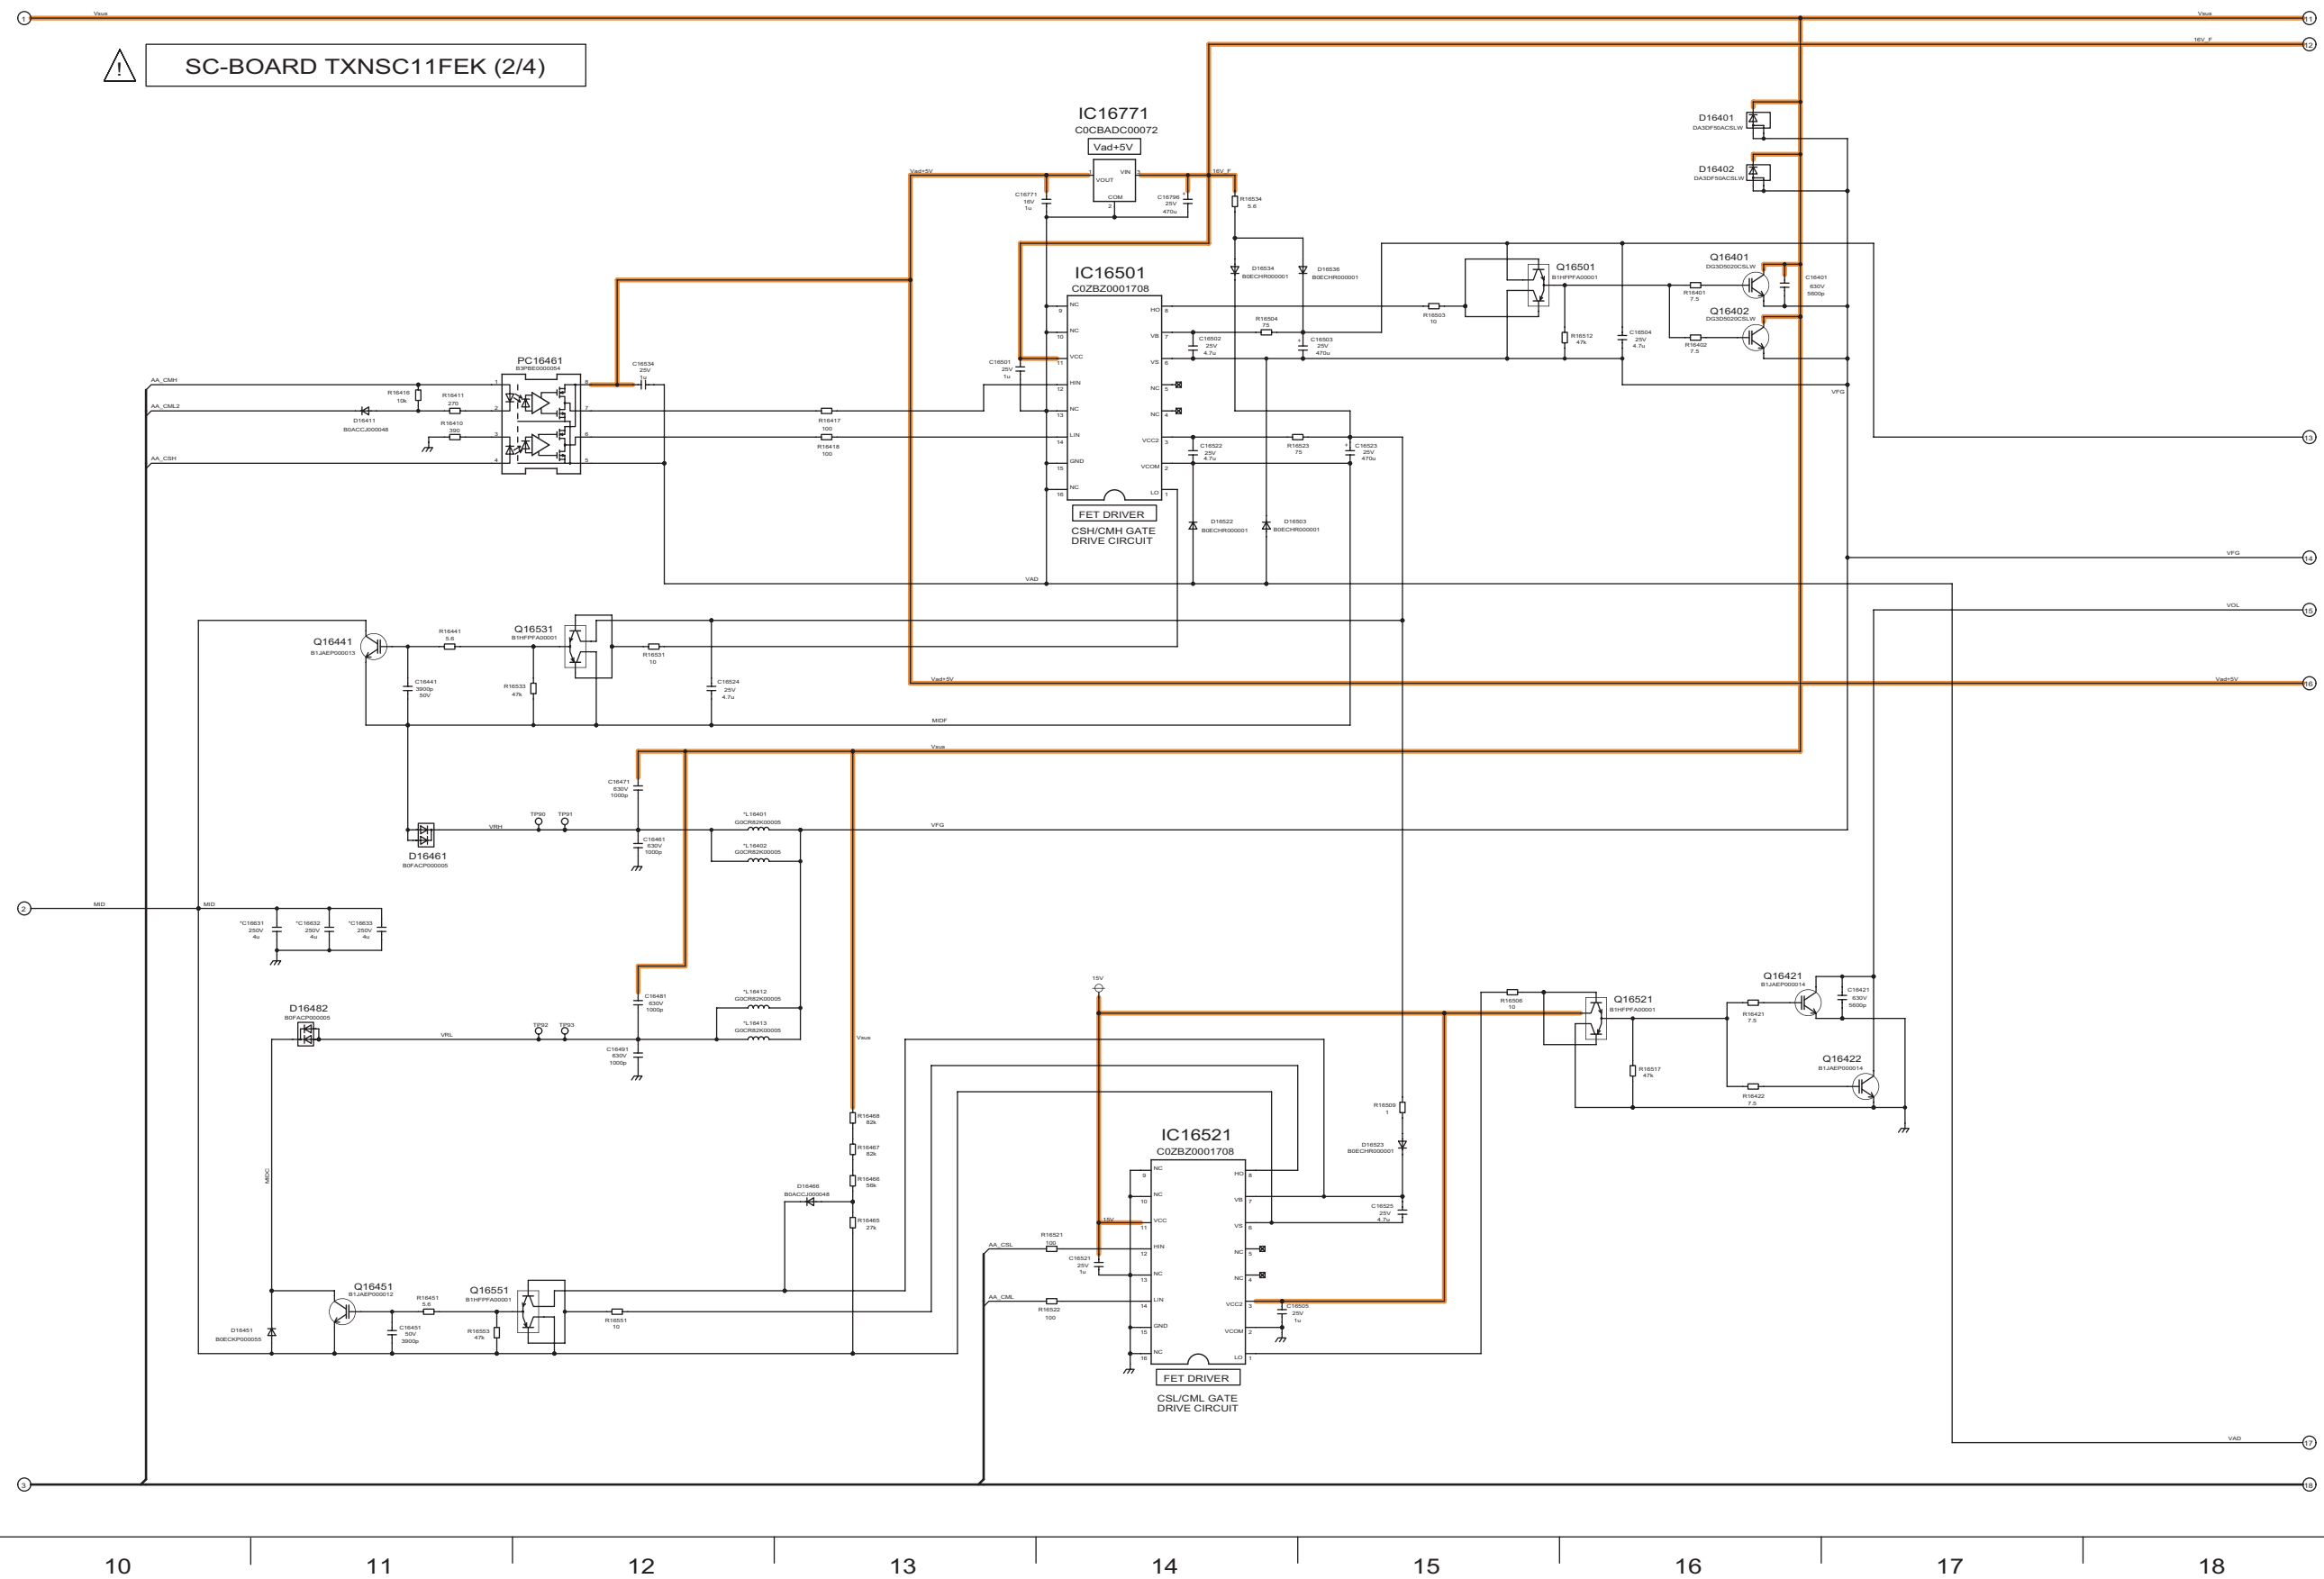


13.35. SC-Board (3/4) Schematic Diagram

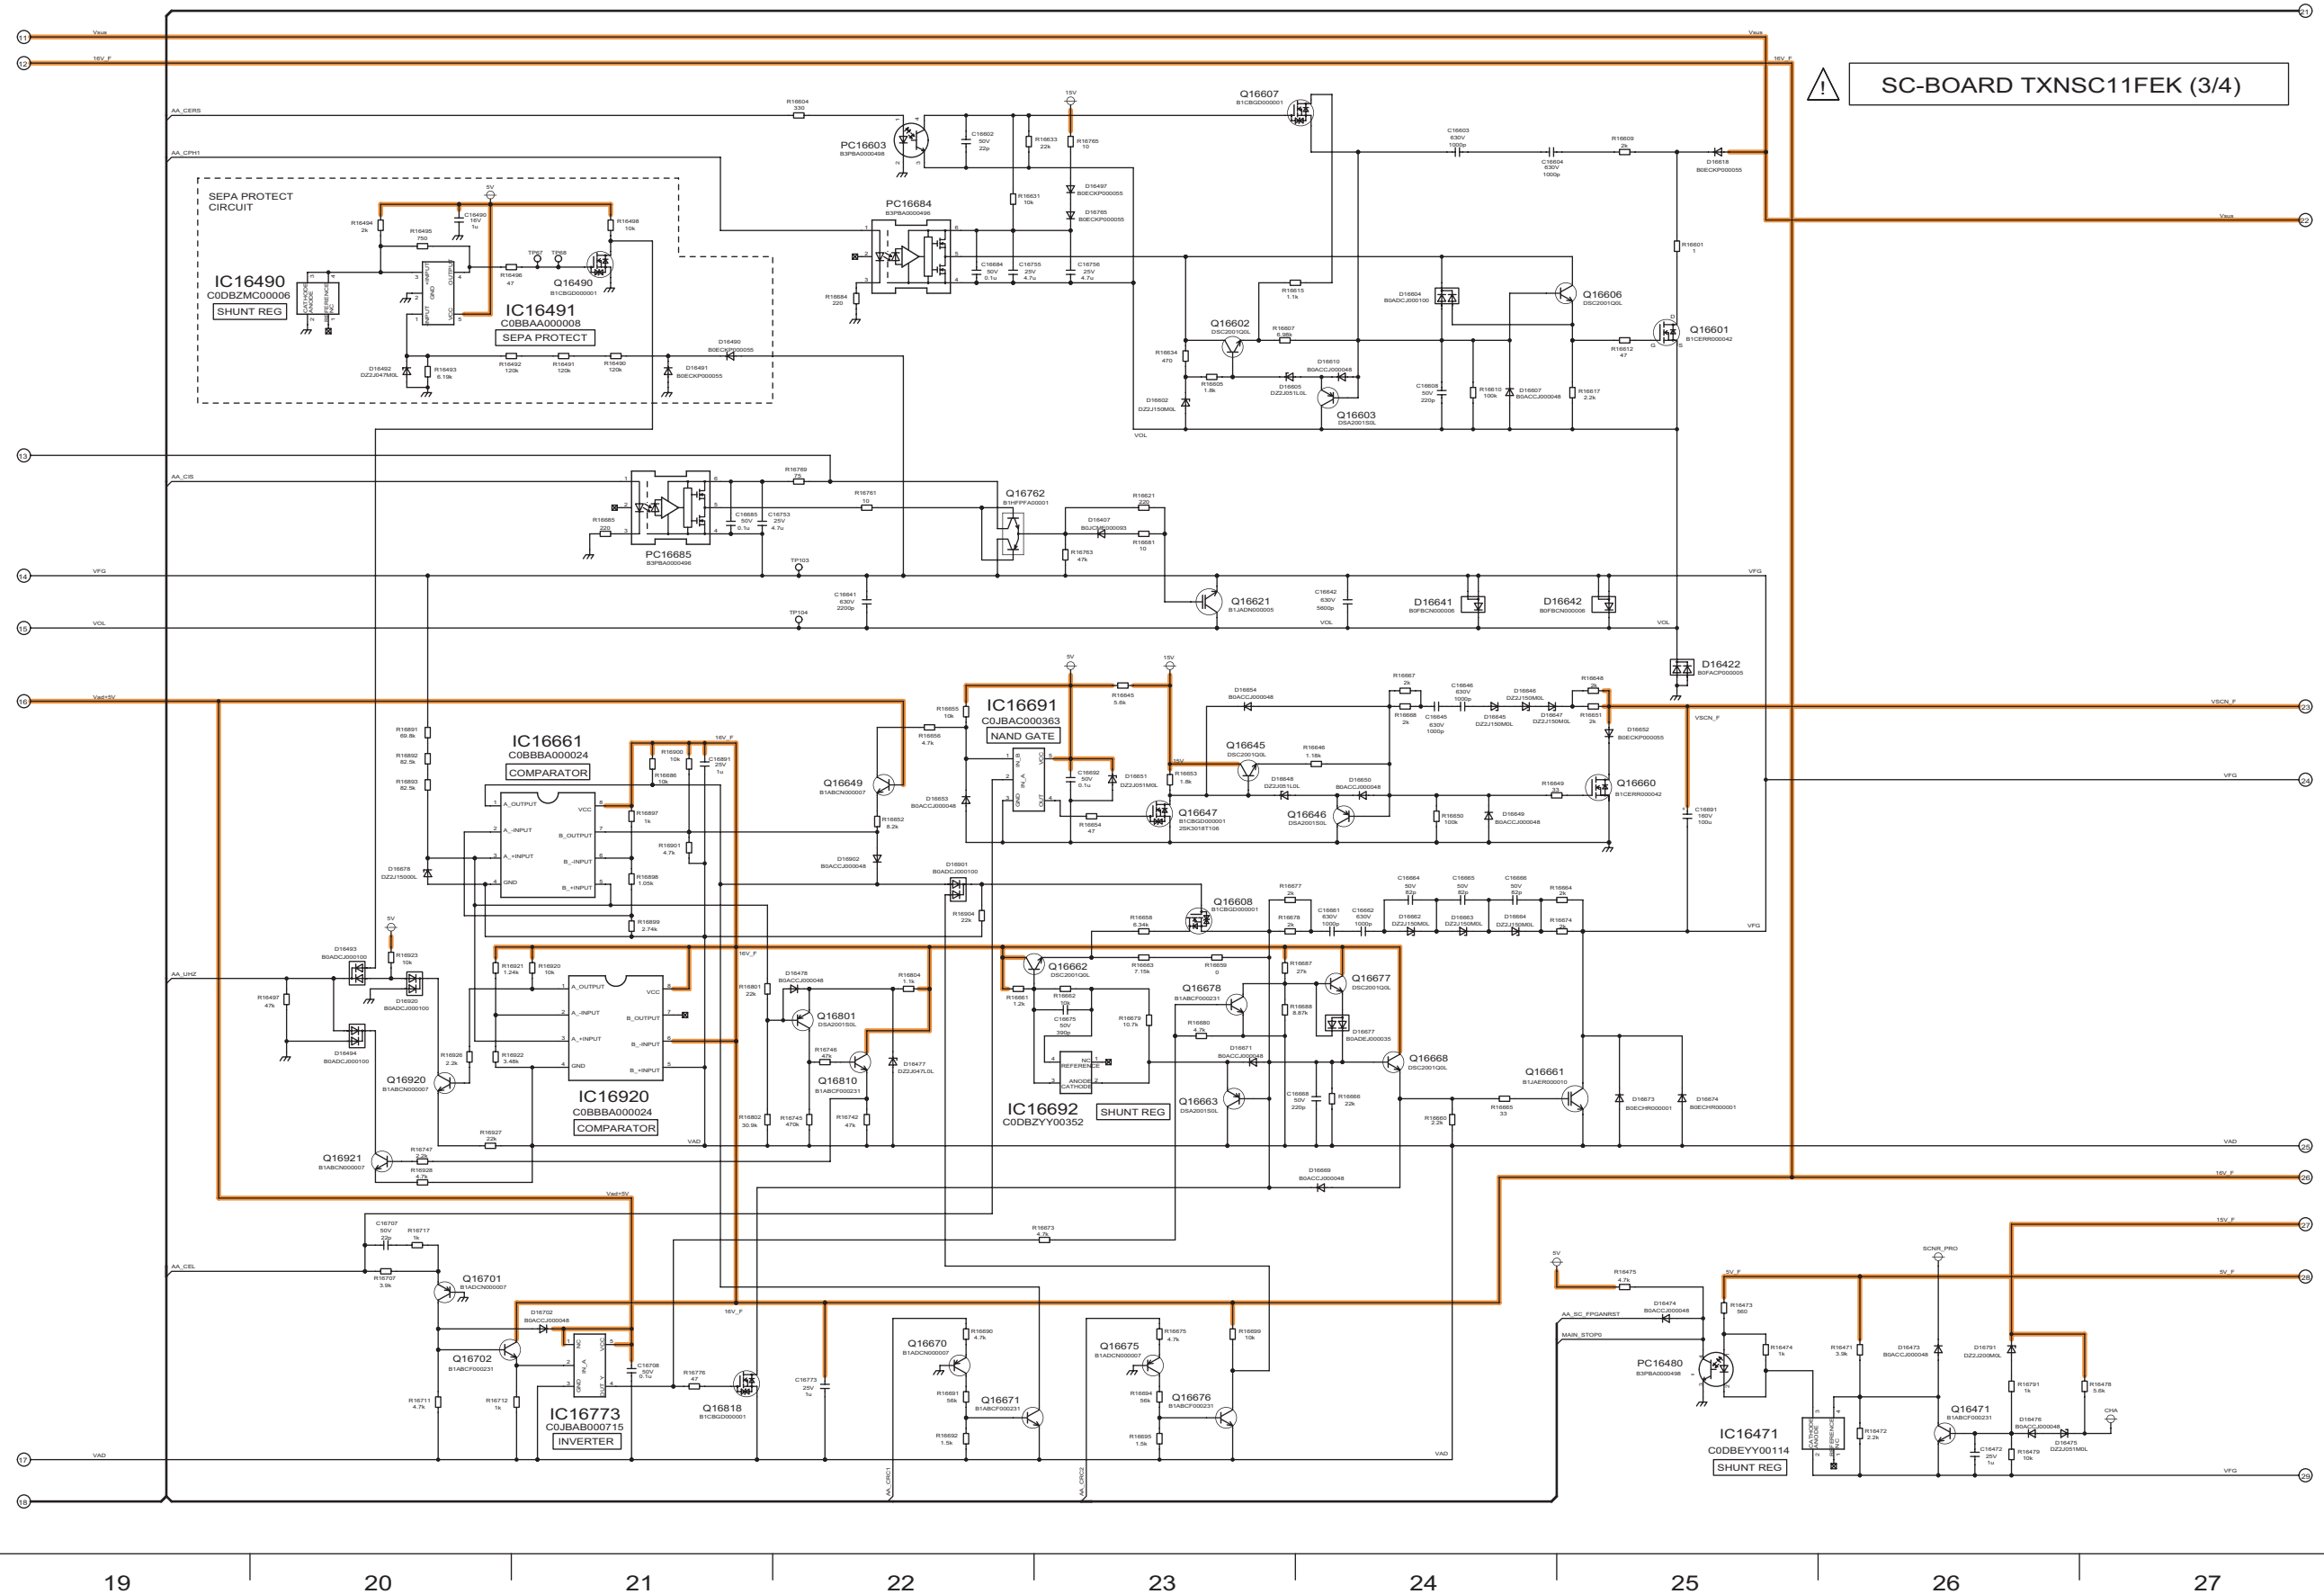


13.36. SC-Board (4/4) Schematic Diagram

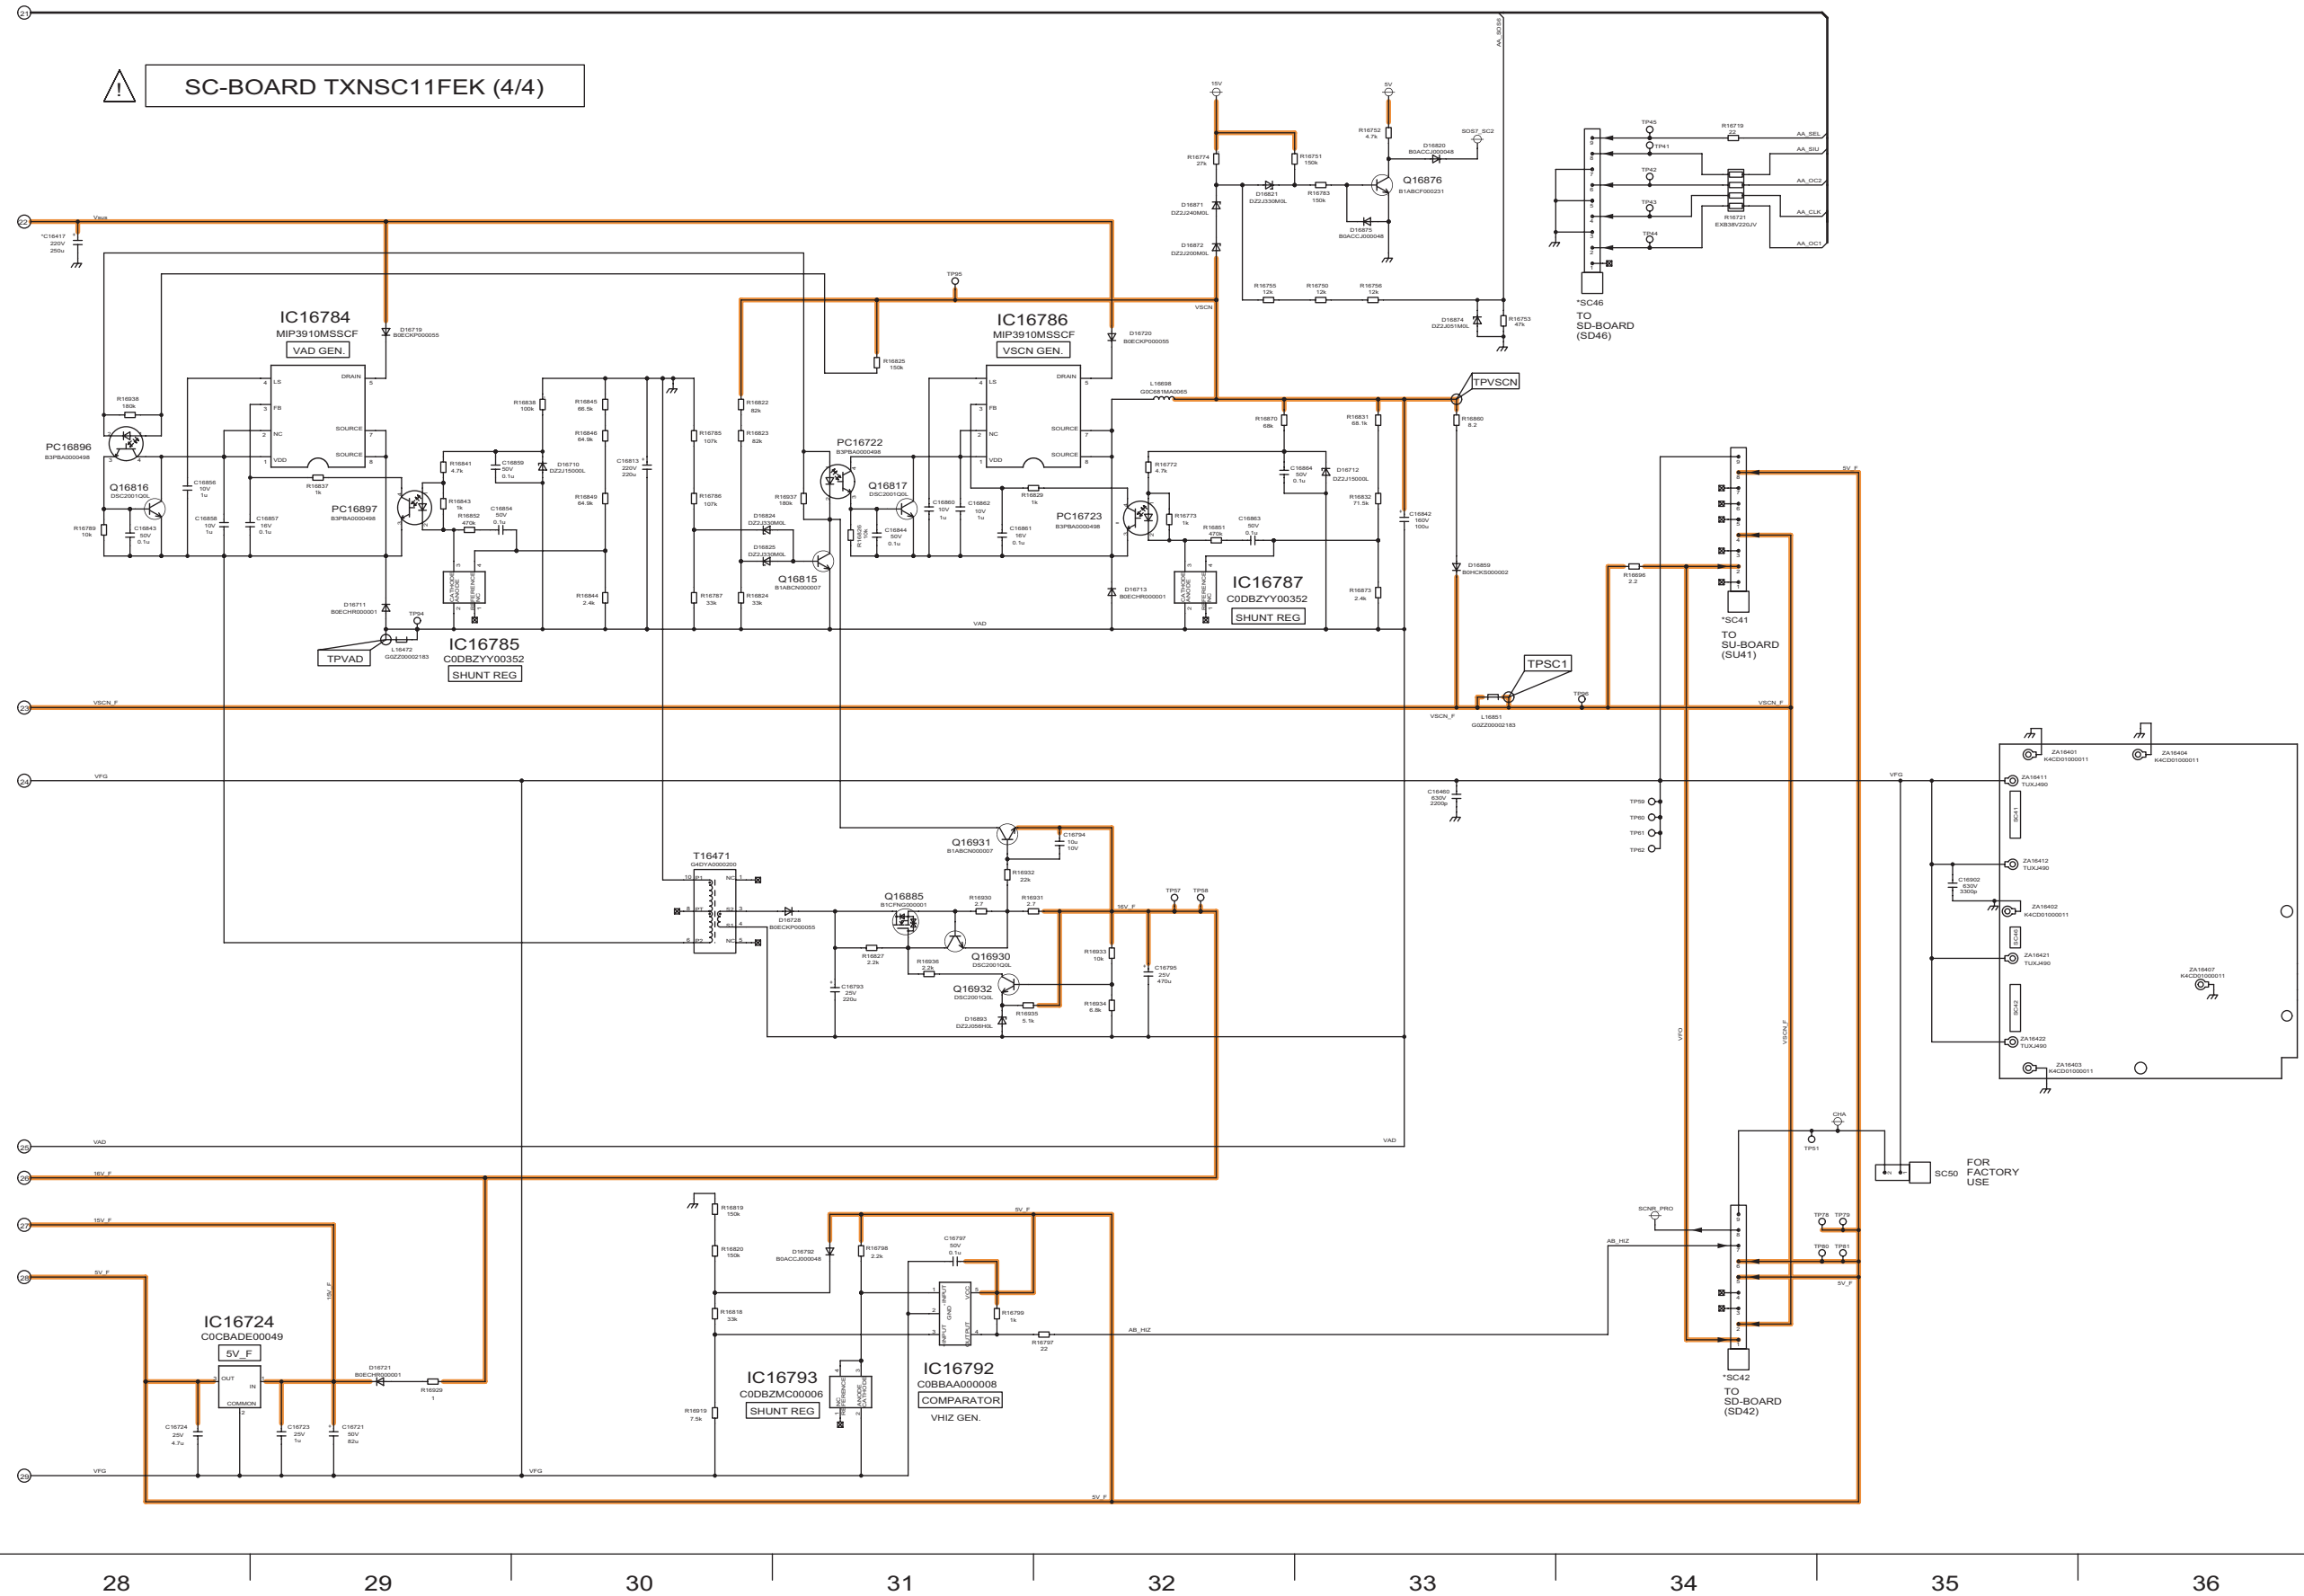

13.37. SS-Board (1/2) Schematic Diagram

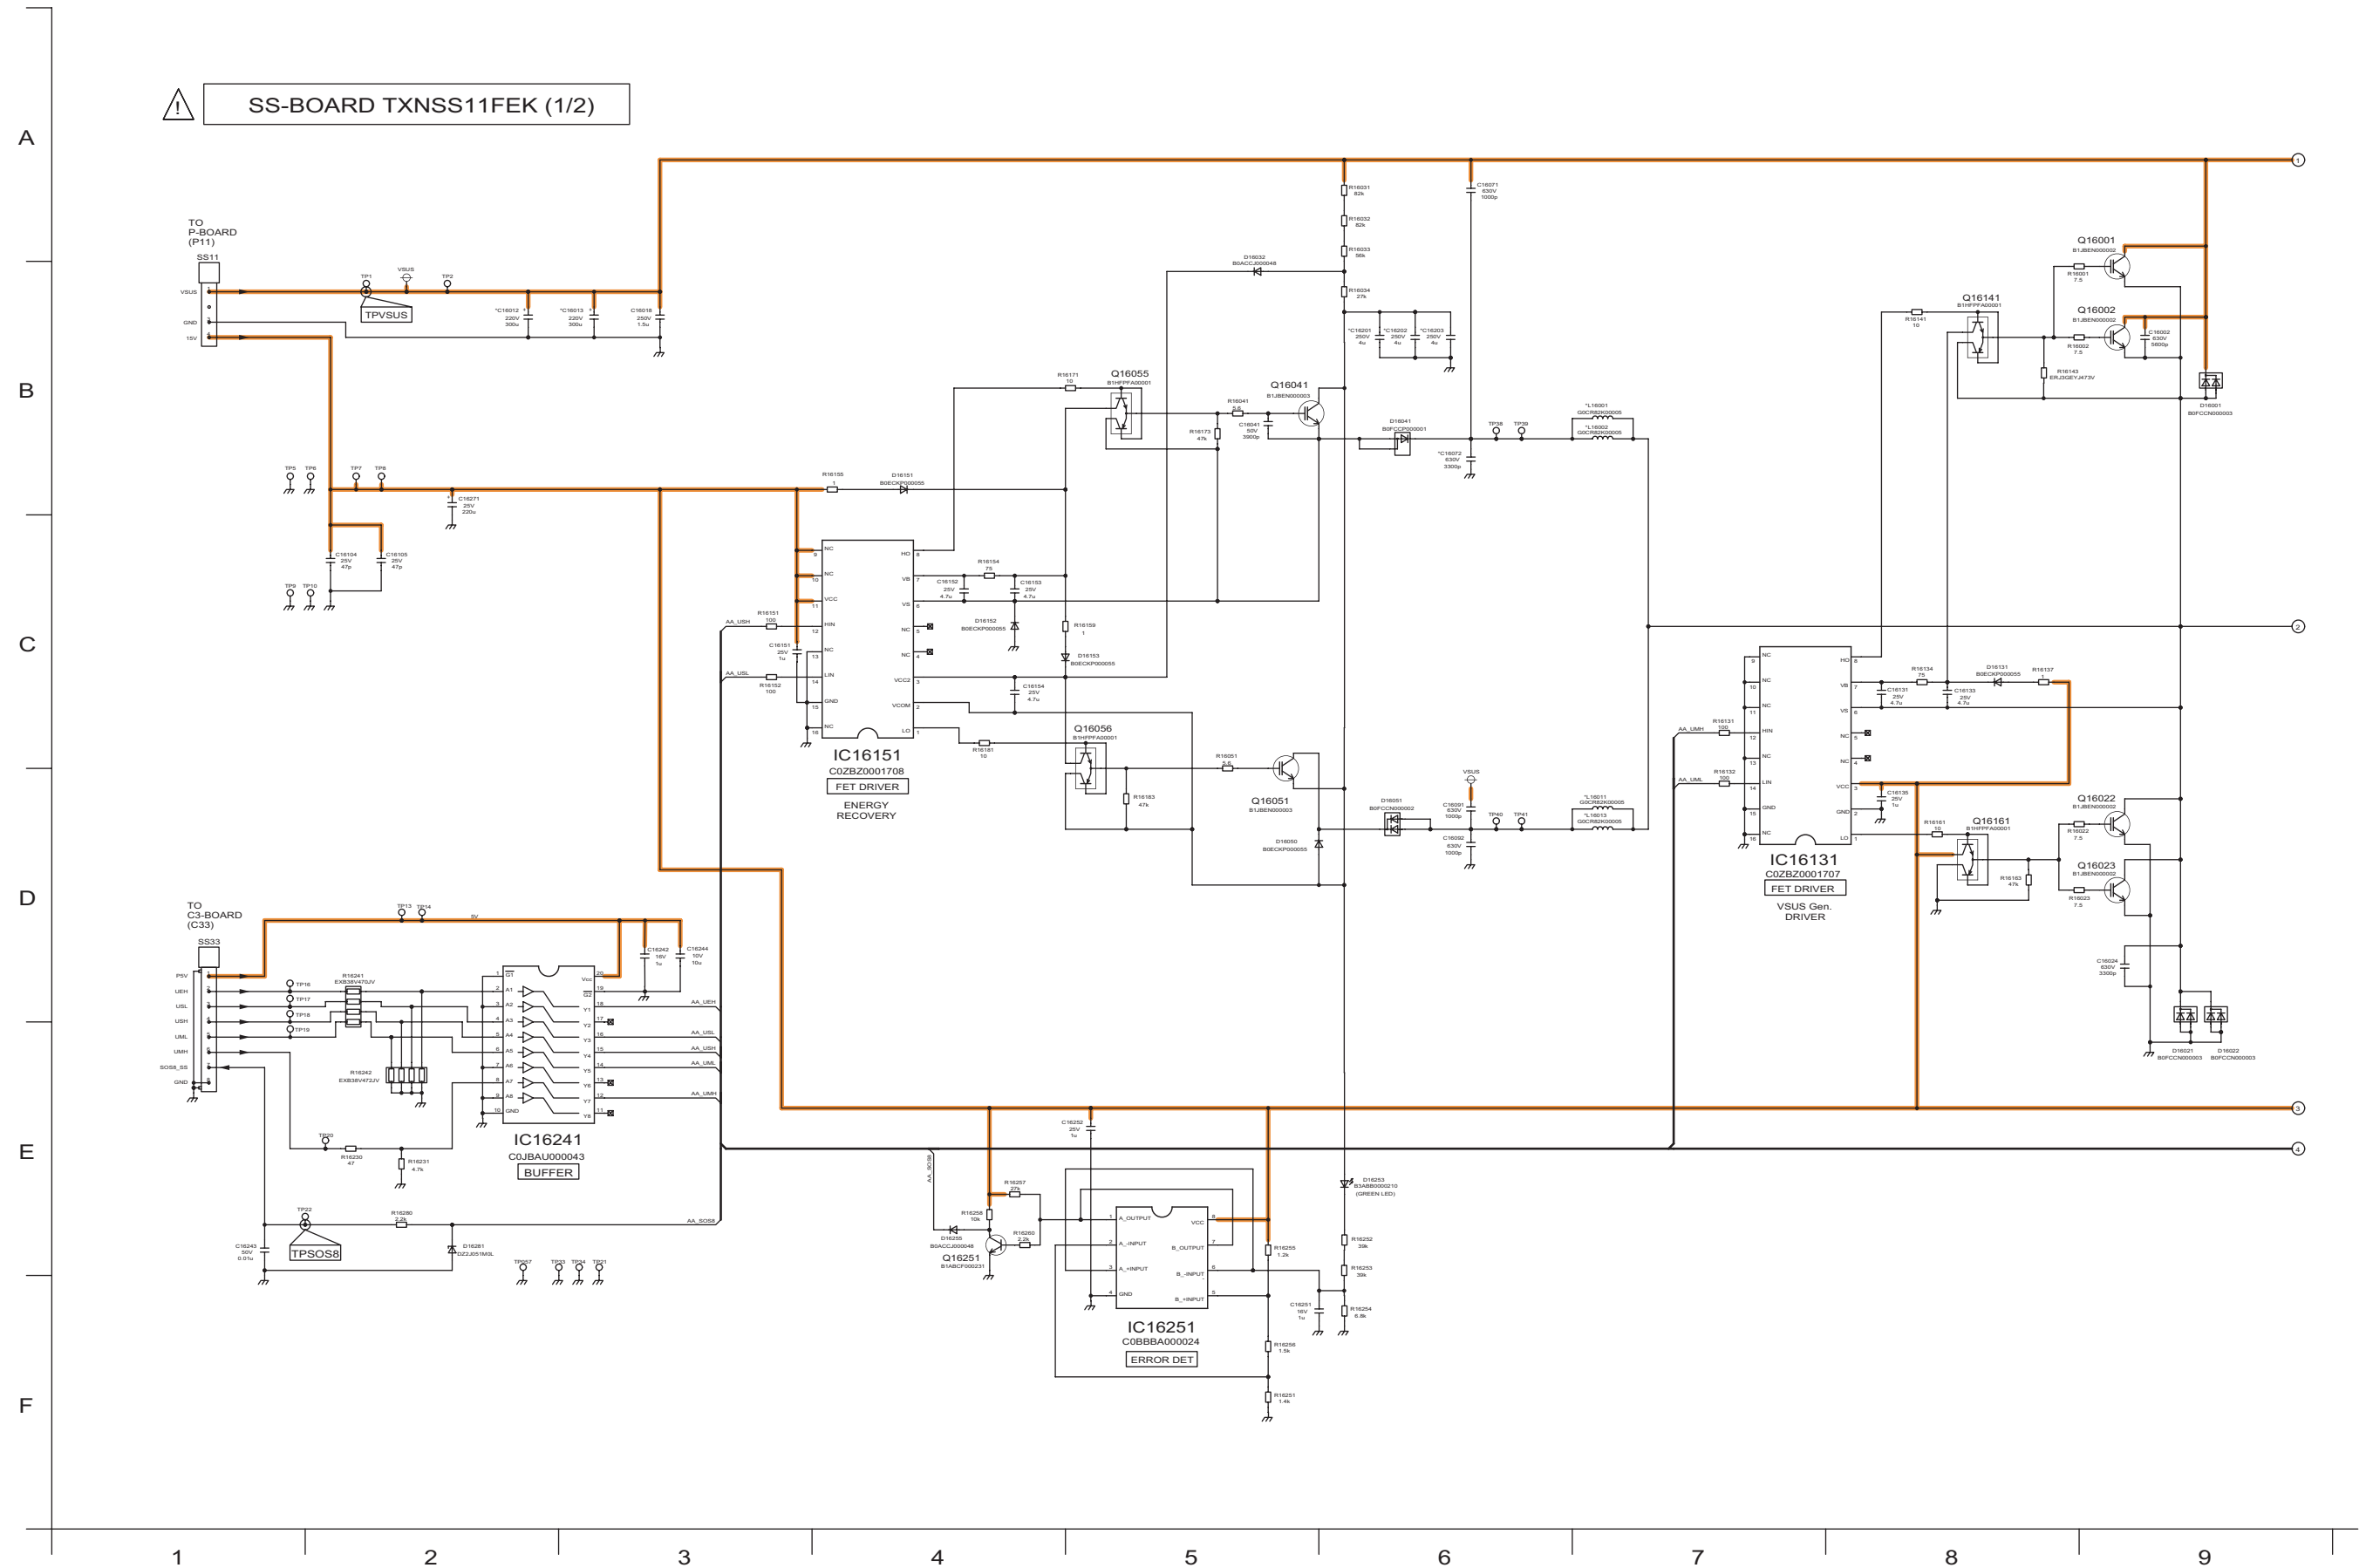



13.38. SS-Board (2/2) and SS2-Board Schematic Diagram

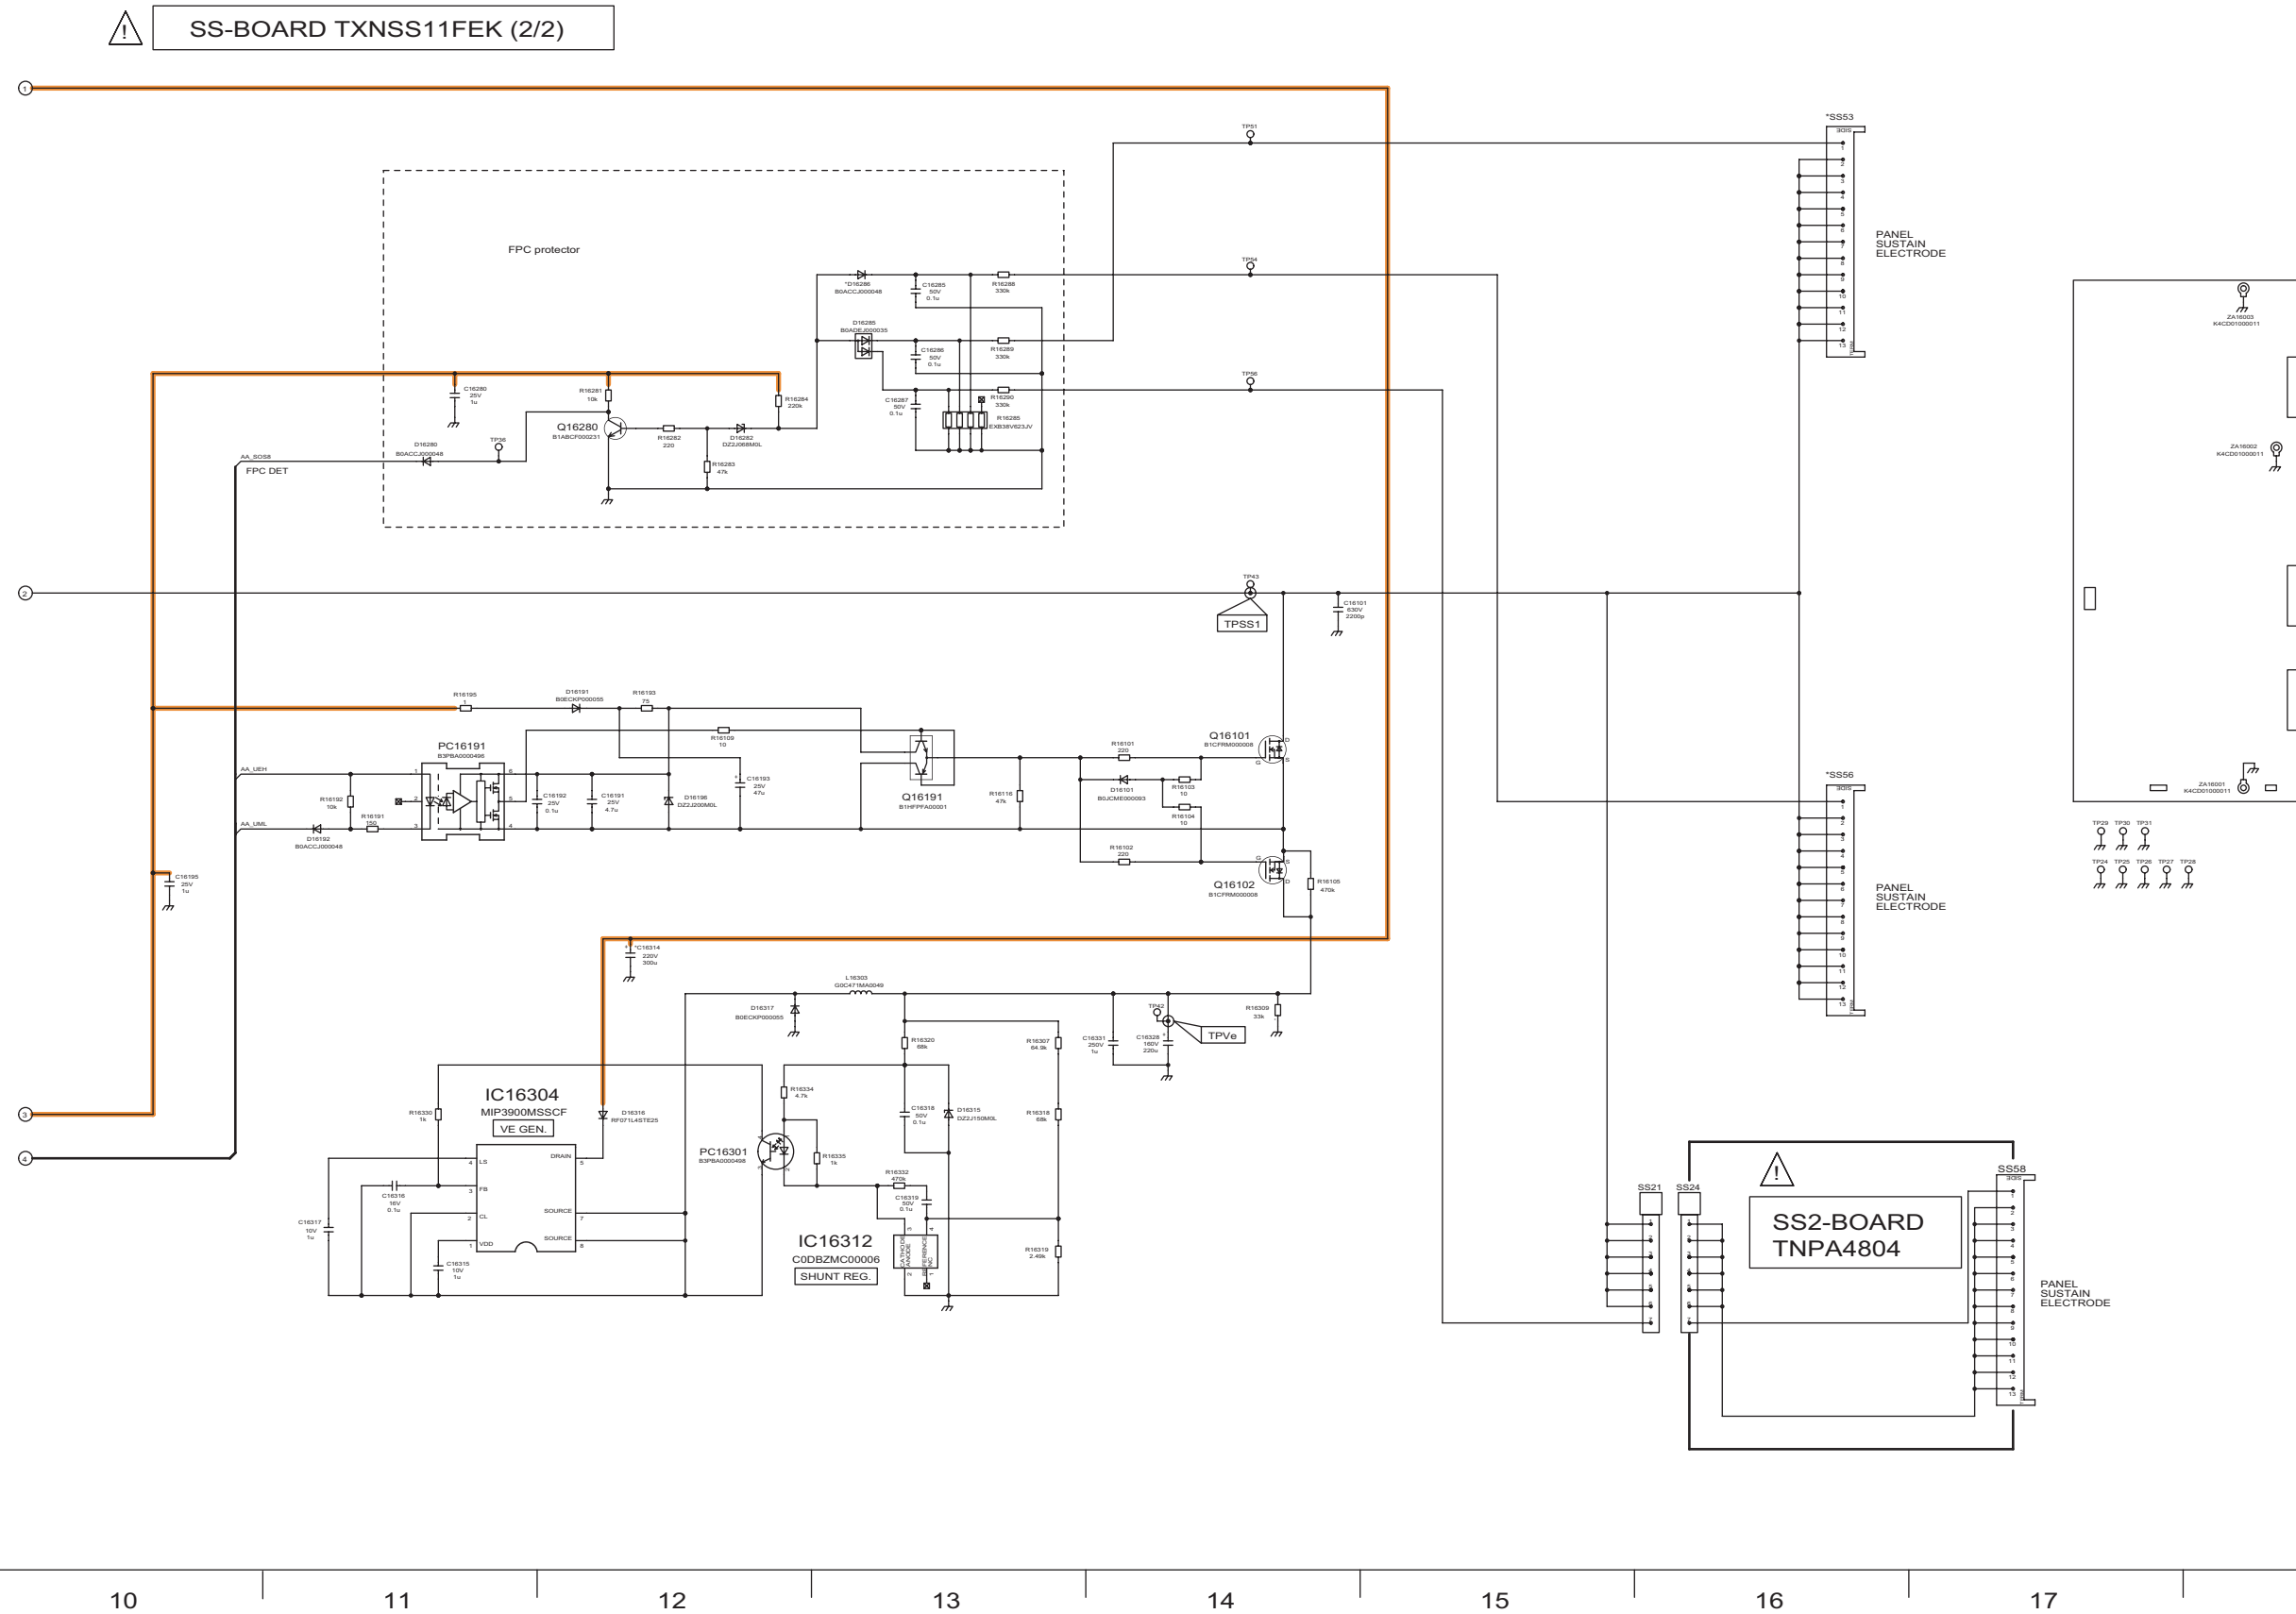

14 Printed Circuit Board

14.1. P-Board

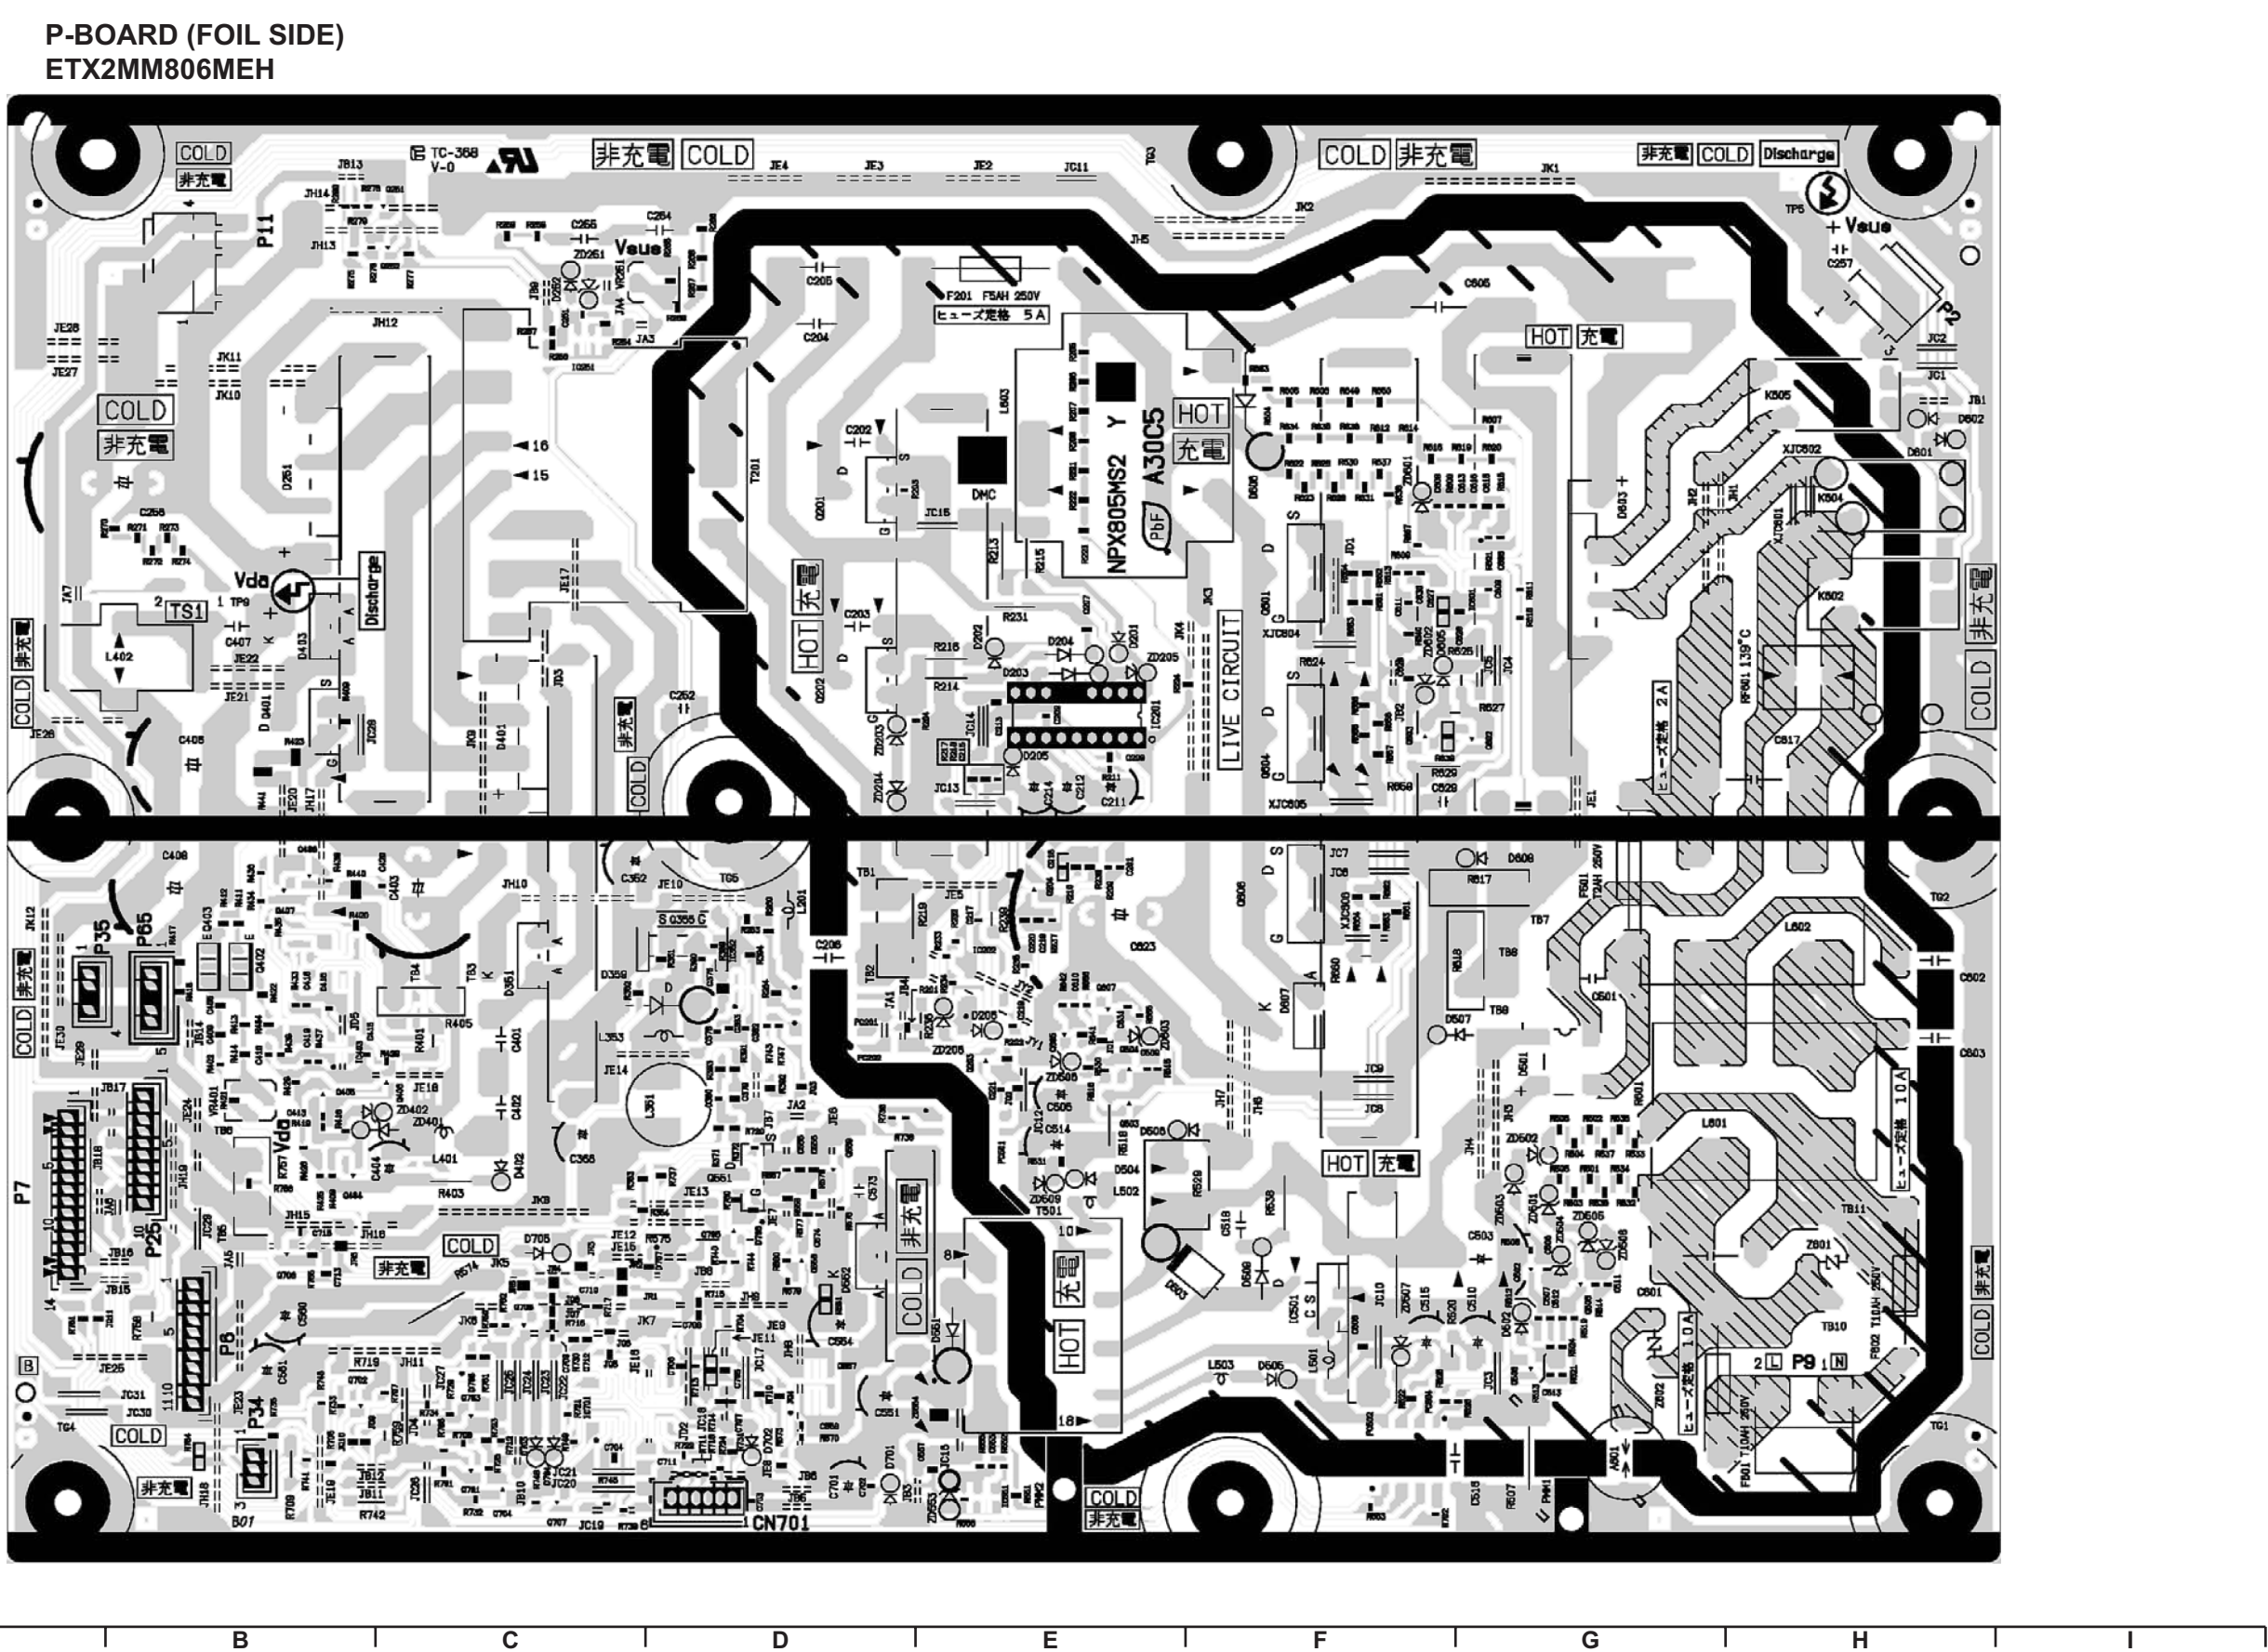

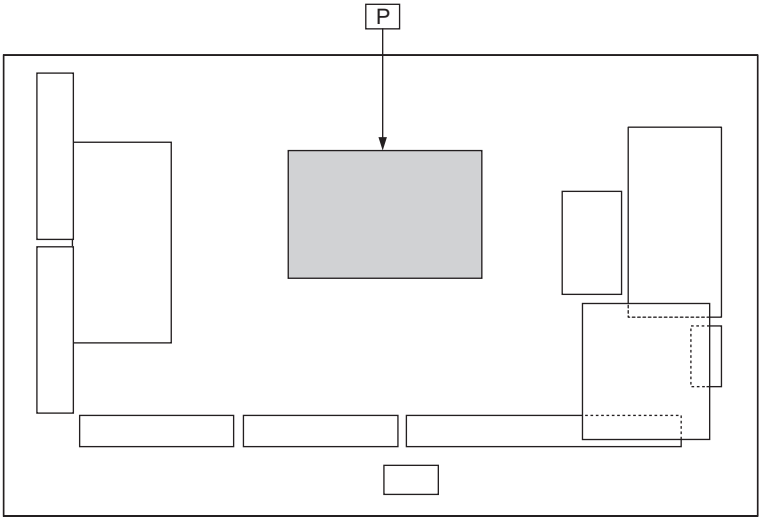


Parts Location

P-BOARD (FOIL SIDE)					
IC		TRANSISTOR			
IC201	E-4	Q201	D-5	Q601	F-4
IC202	E-3	Q202	D-4	Q602	G-4
IC251	C-5	Q203	E-3	Q603	F-4
IC352	D-3	Q204	E-3	Q604	F-4
IC403	B-3	Q251	C-6	Q605	E-3
IC501	F-2	Q252	C-6	Q606	F-3
IC551	E-1	Q355	D-3	Q607	E-3
IC601	G-4	Q401	B-4	Q701	C-1
IC701	C-1	Q402	B-3	Q702	B-1
PHOTO COUPLER		Q403	B-3	Q703	C-1
		Q404	B-2	Q704	C-1
		Q405	B-2	Q705	D-2
		Q406	C-2	Q706	B-2
		Q407	B-3	Q707	C-1
		Q408	B-3	Q708	C-2
		Q502	G-2	TEST POINT	
		Q503	E-2	TP5	H-6
		Q504	E-3	TP9	B-4
		Q505	G-2	VOLUME	
PC201	D-3	Q506	G-1	VR251	C-5
PC202	D-3	Q551	D-2	VR401	B-2
PC501	E-2	Q557	D-1		
PC502	F-1	Q558	D-2		
PC504	F-1	Q559	D-2		


Parts Location

P-BOARD (COMPONENT SIDE)					
IC		TRANSISTOR		TEST POINT	
IC201	D-2	Q201	E-5	TP5	B-6
IC501	D-4	Q202	E-4	TP9	H-4
		Q355	F-3	VOLUME	
		Q401	G-4	VR251	F-5
		Q402	H-3	VR401	H-2
		Q403	H-3		
		Q551	F-2		
		Q601	D-4		
		Q604	D-4		
		Q606	D-3		


P-BOARD (COMPONENT SIDE)
ETX2MM806MEH

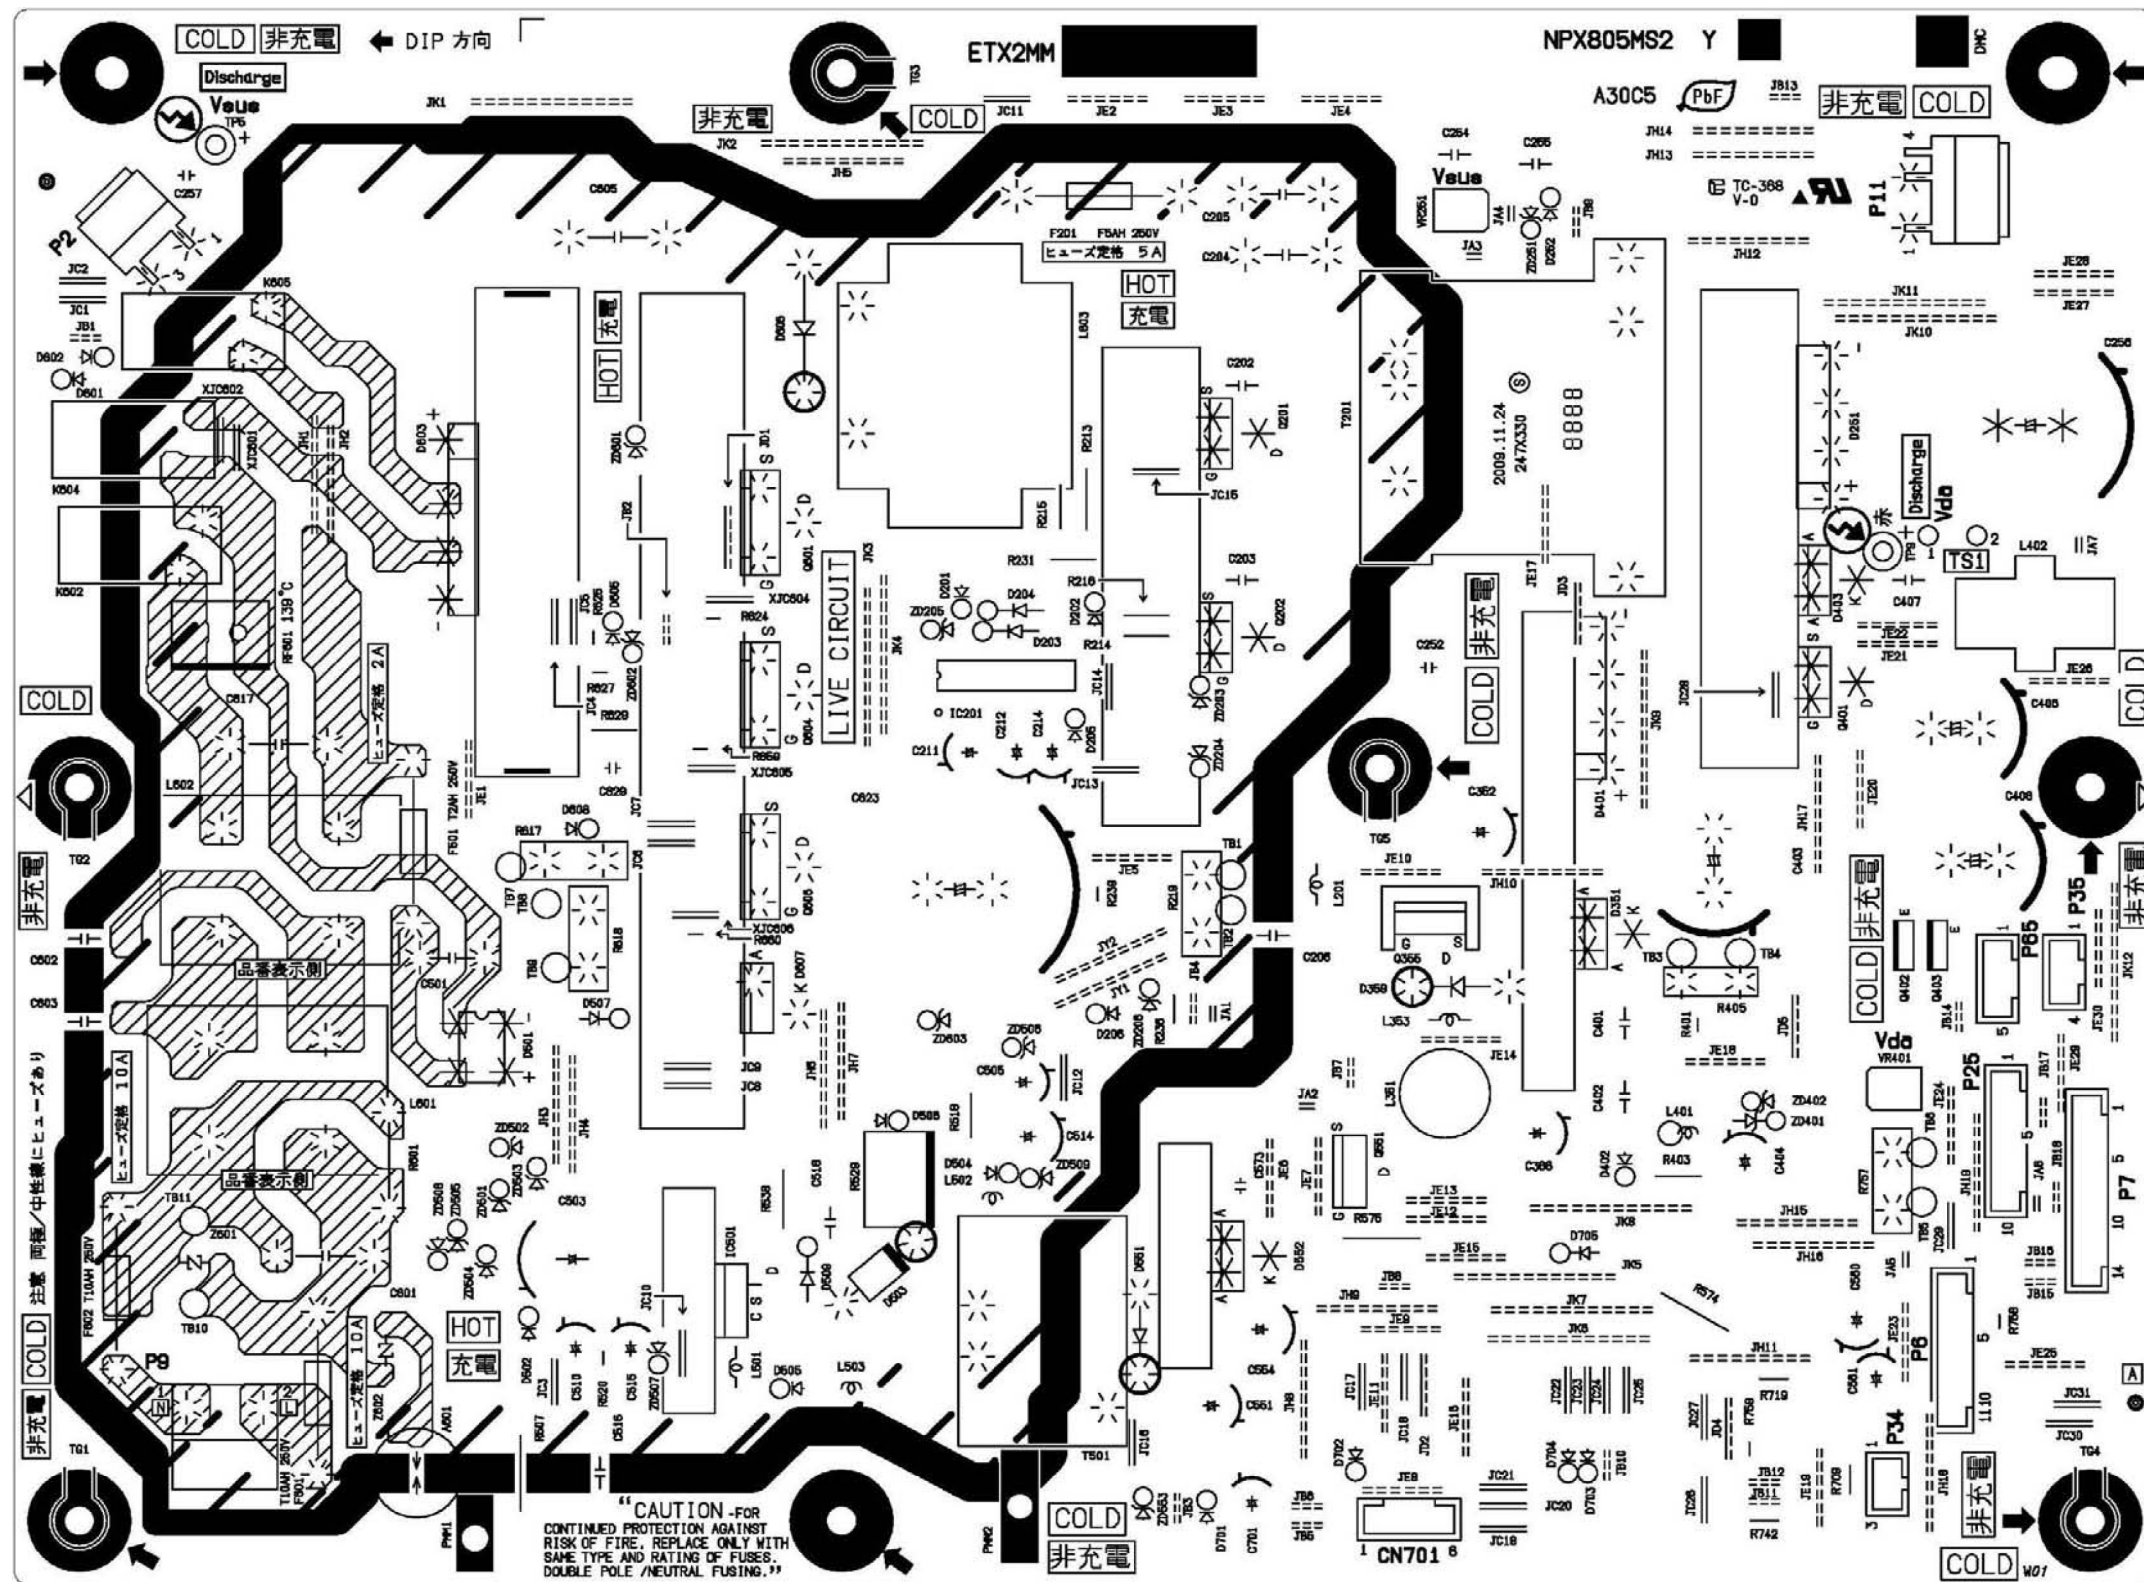

14.2. K and SS2-Board

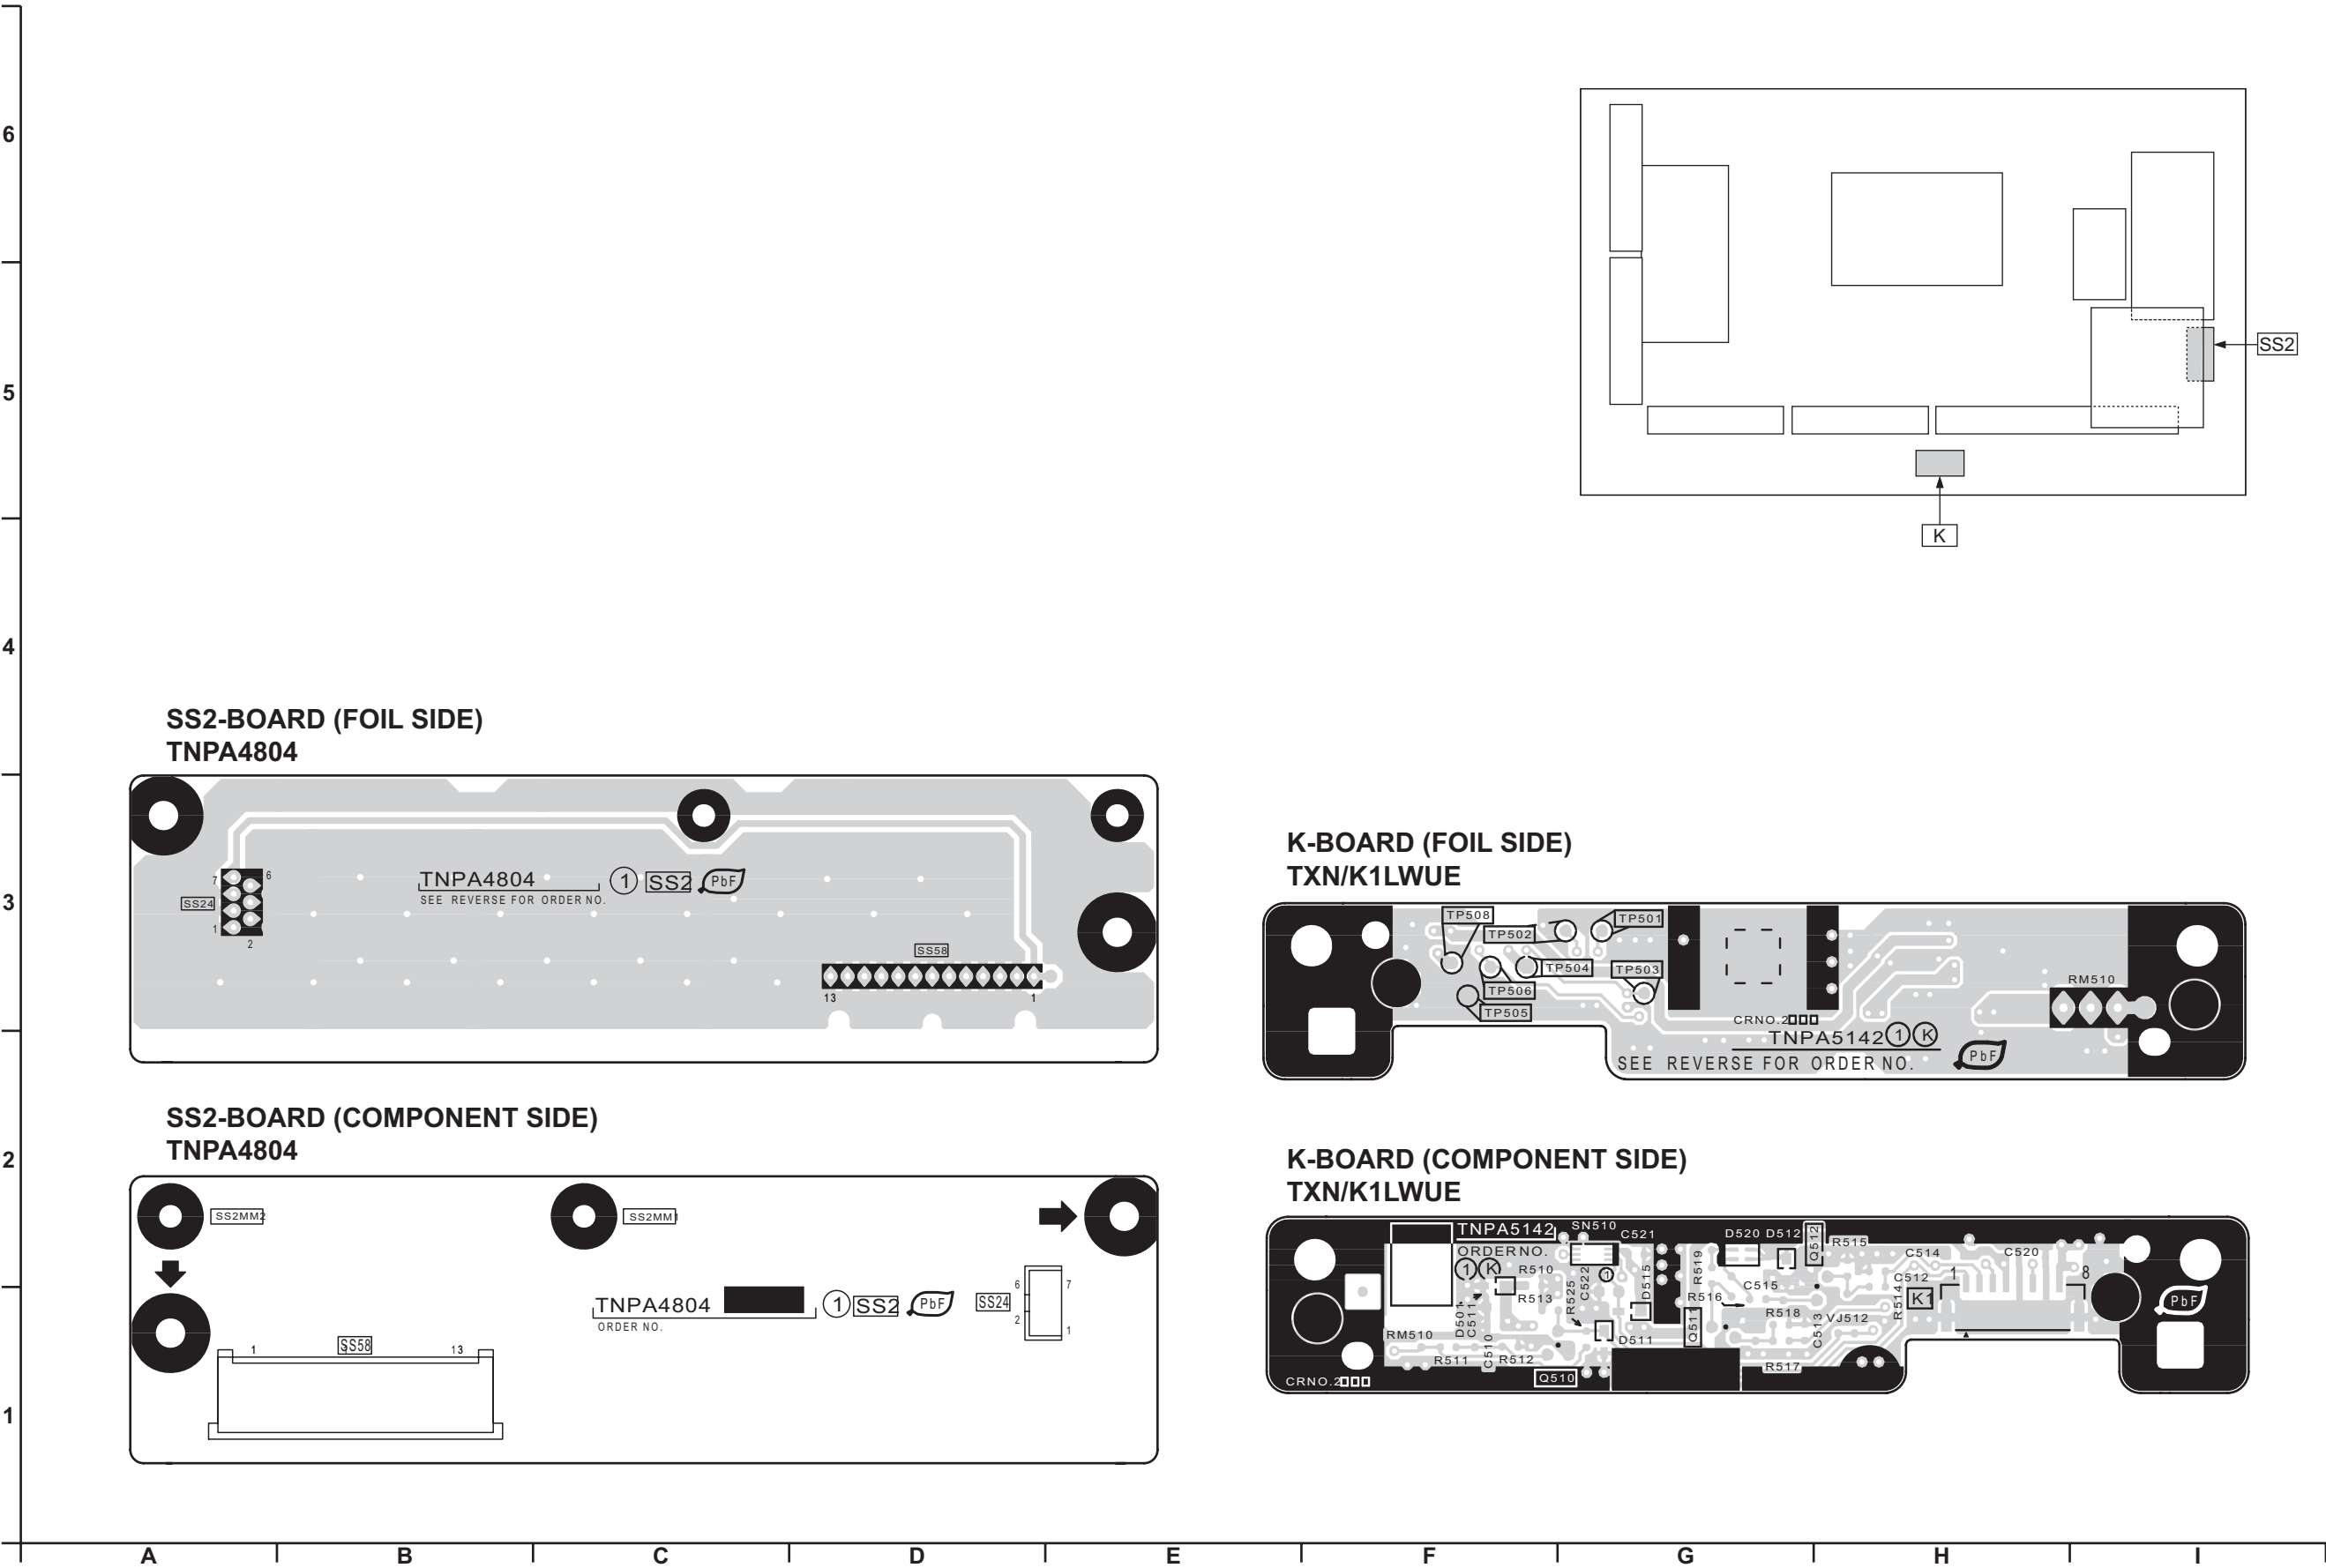


14.3. A-Board

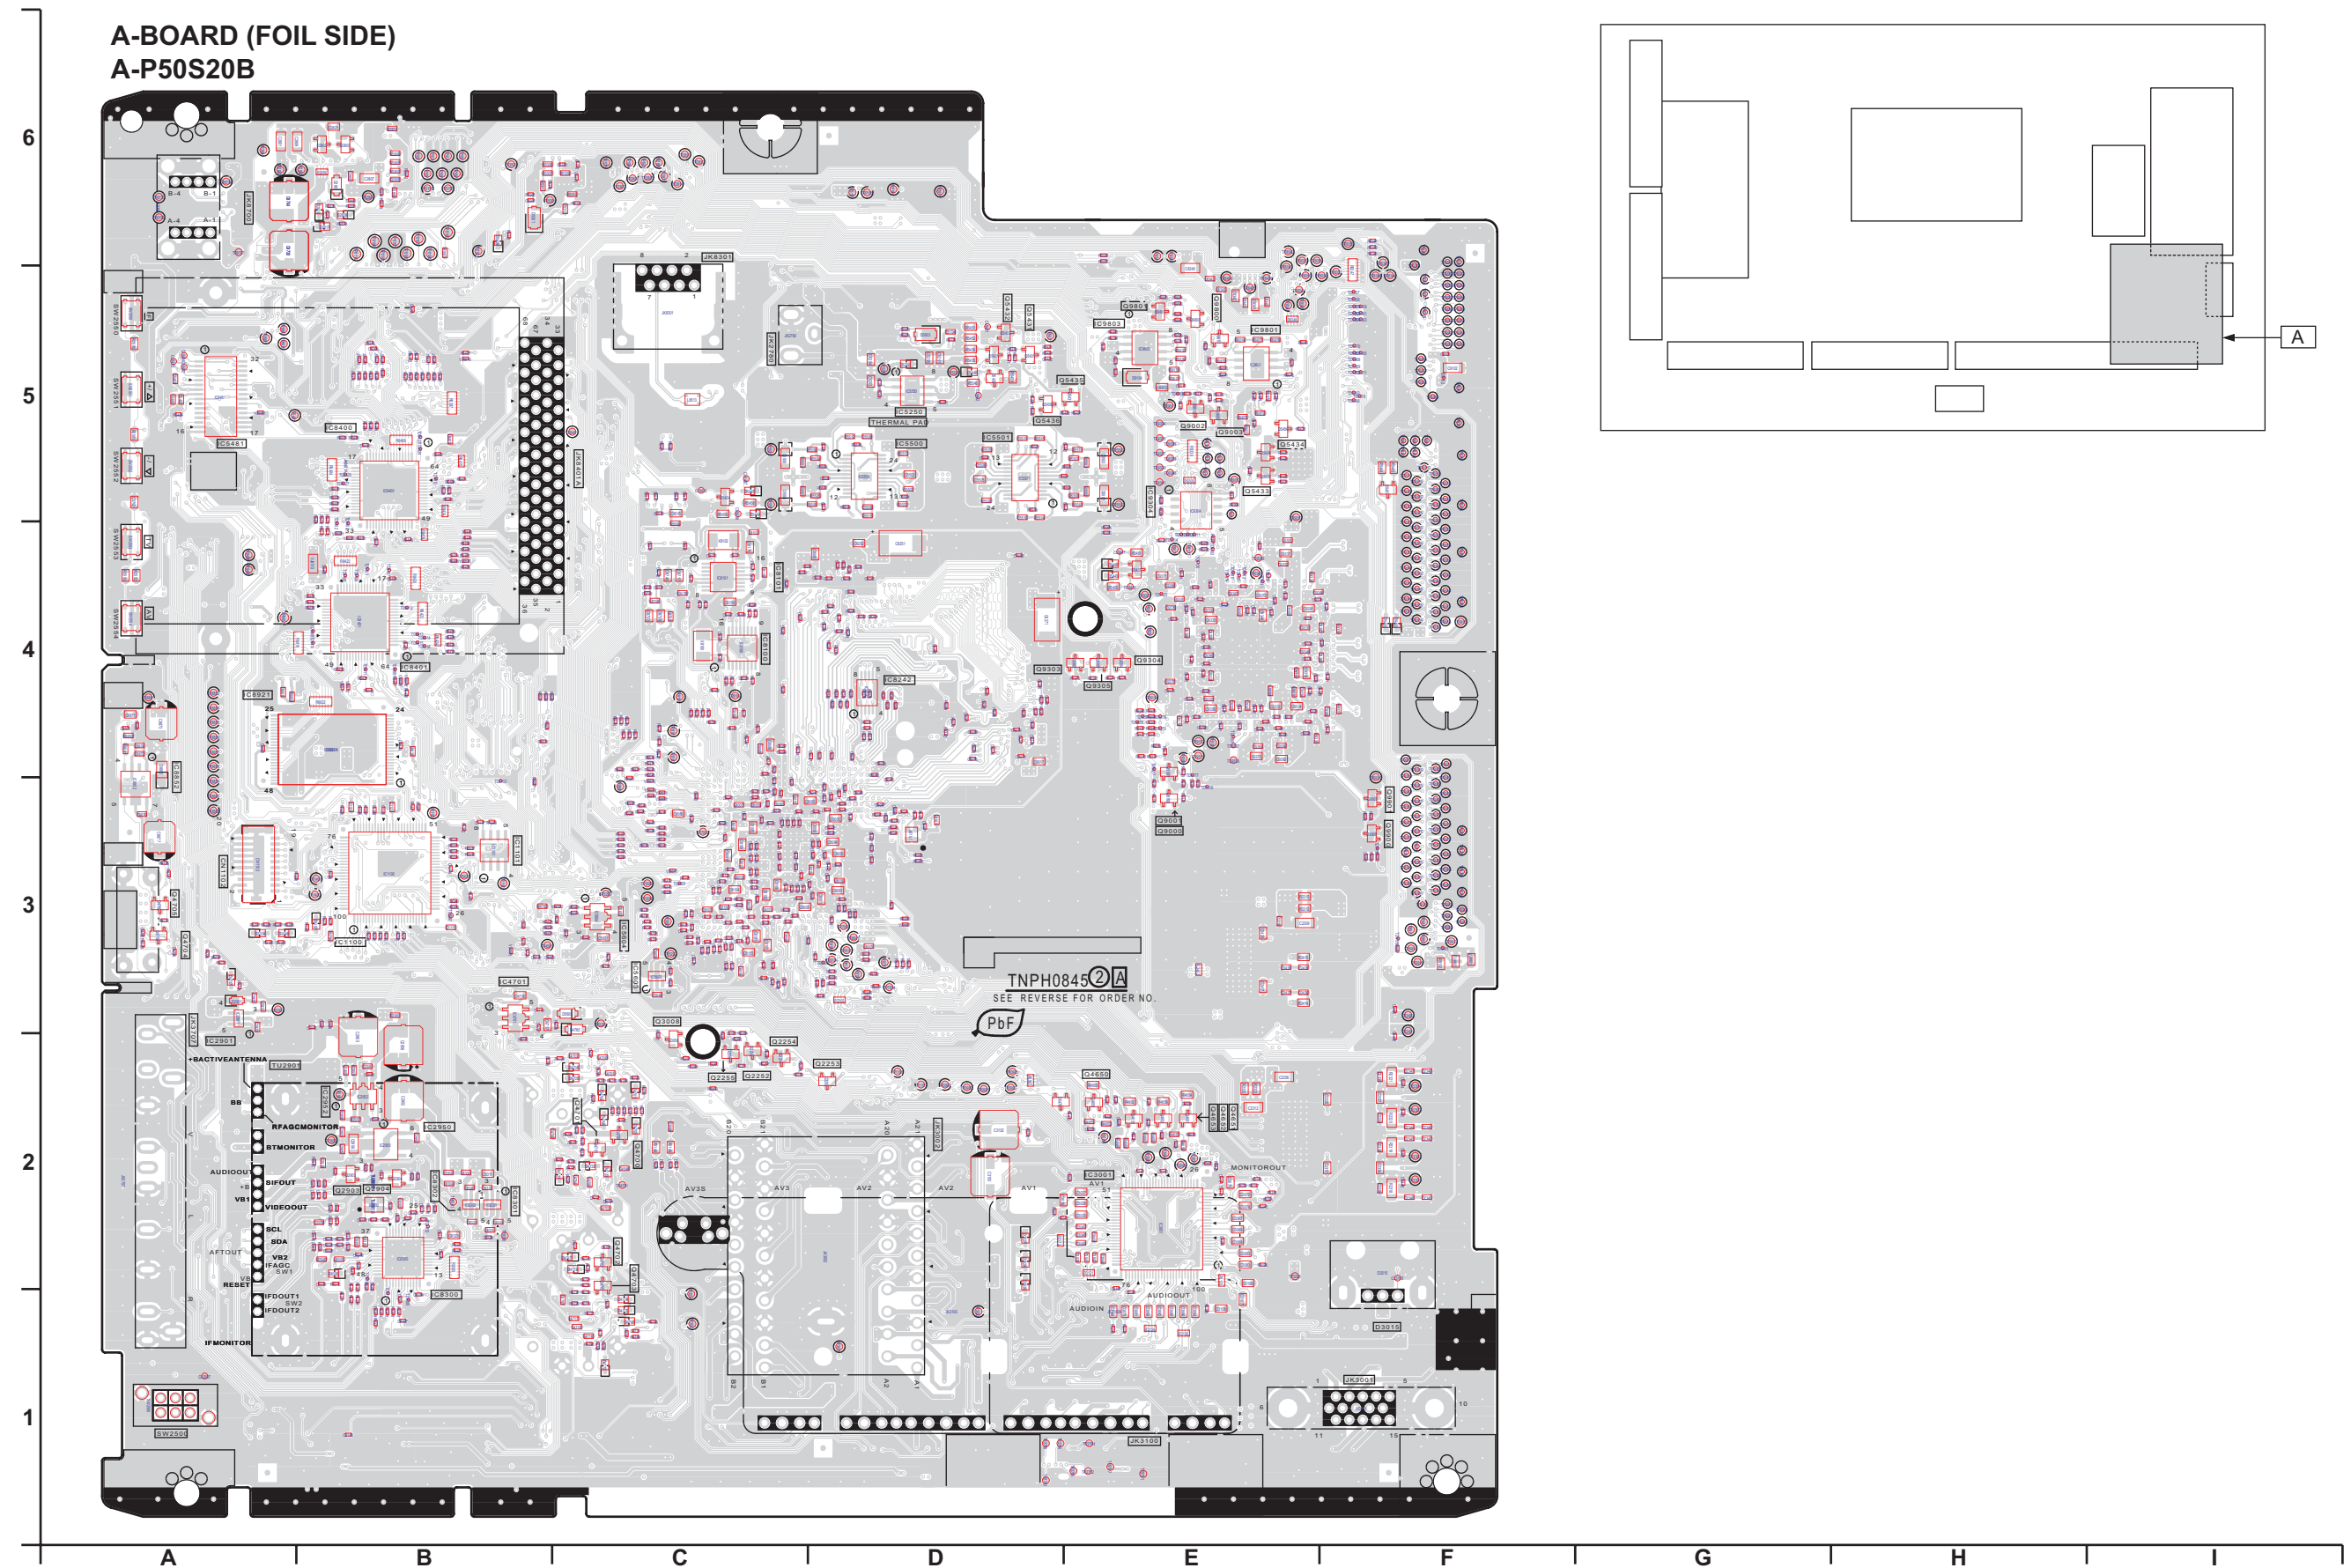


A vertical axis with tick marks and labels 1, 2, 3, 4, 5, 6.




14.4. XW-Board

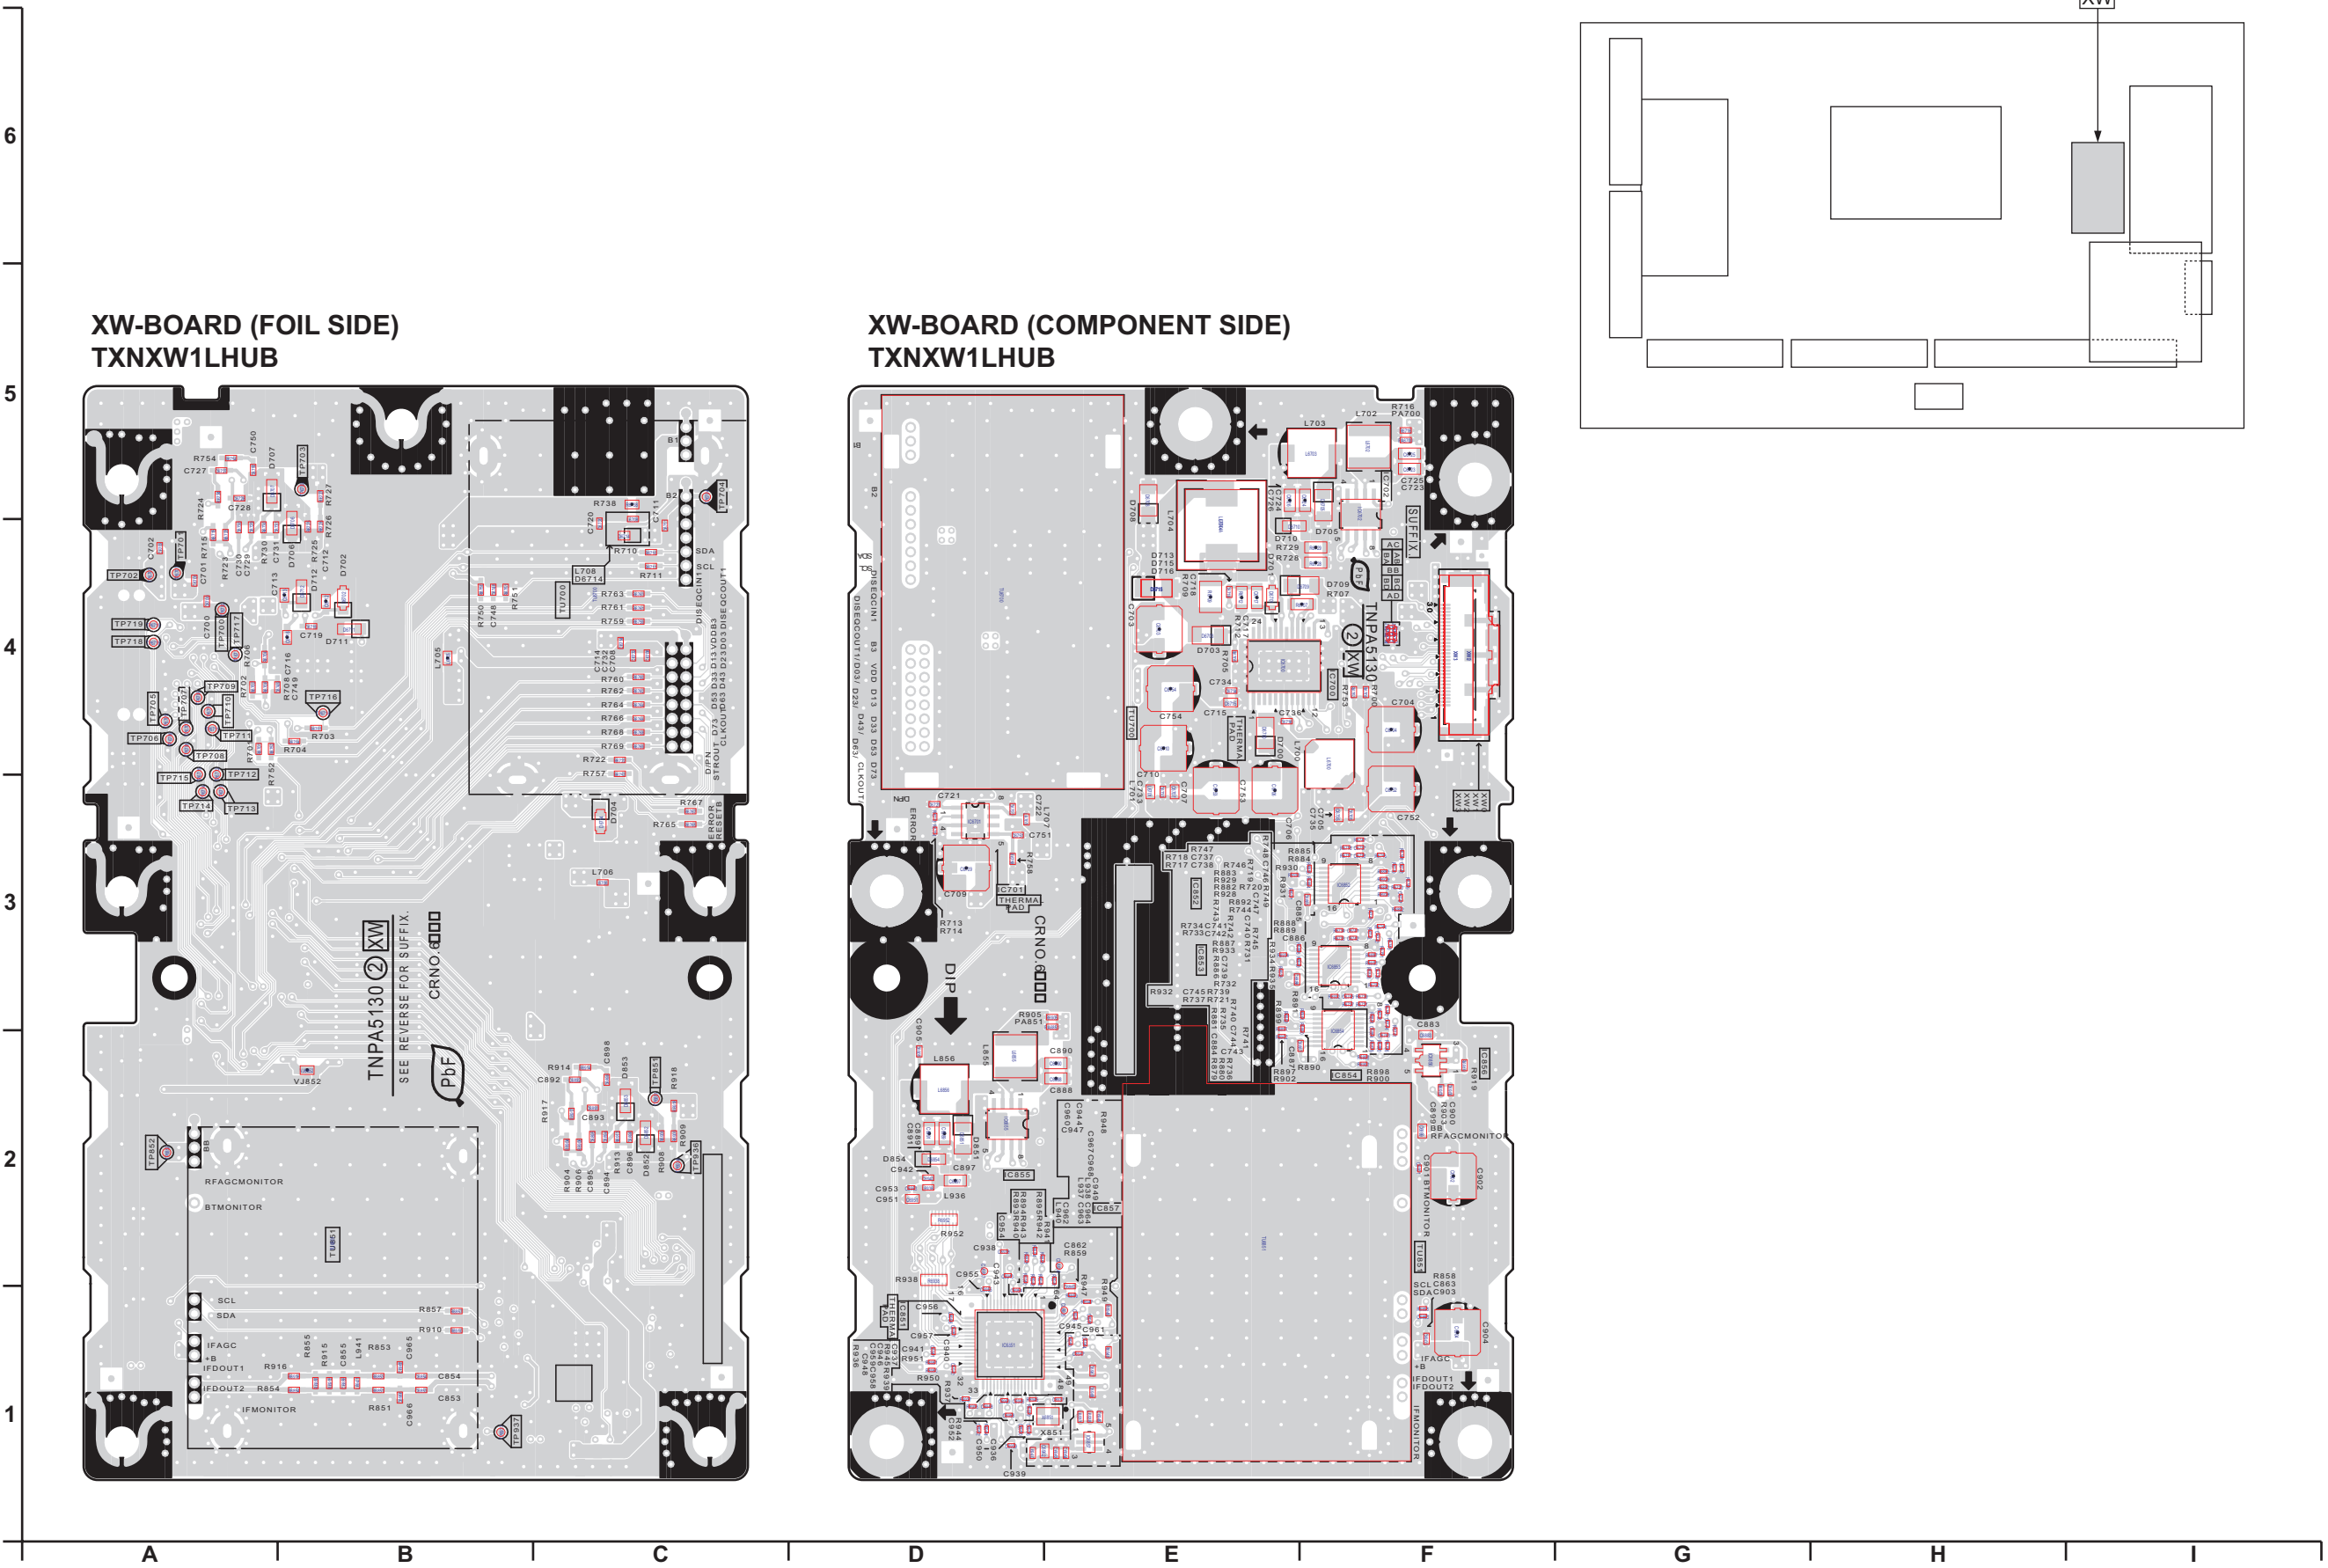


14.7. C3-Board

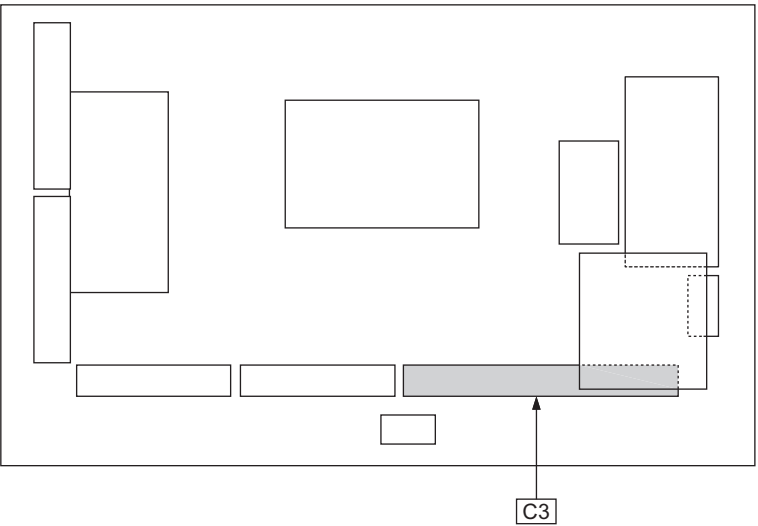


C3-BOARD (FOIL SIDE)
TNPA5101

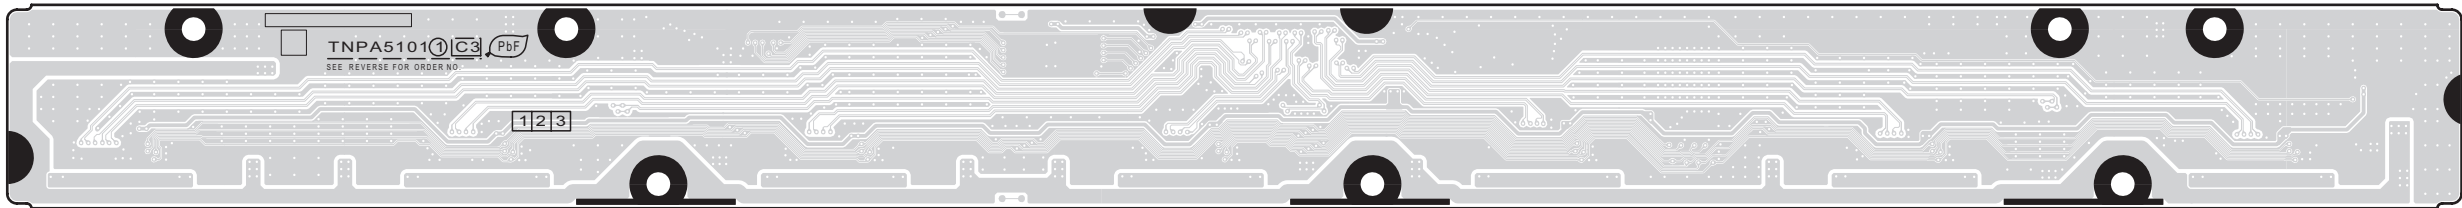

C3-BOARD (COMPONENT SIDE)
TNPA5101

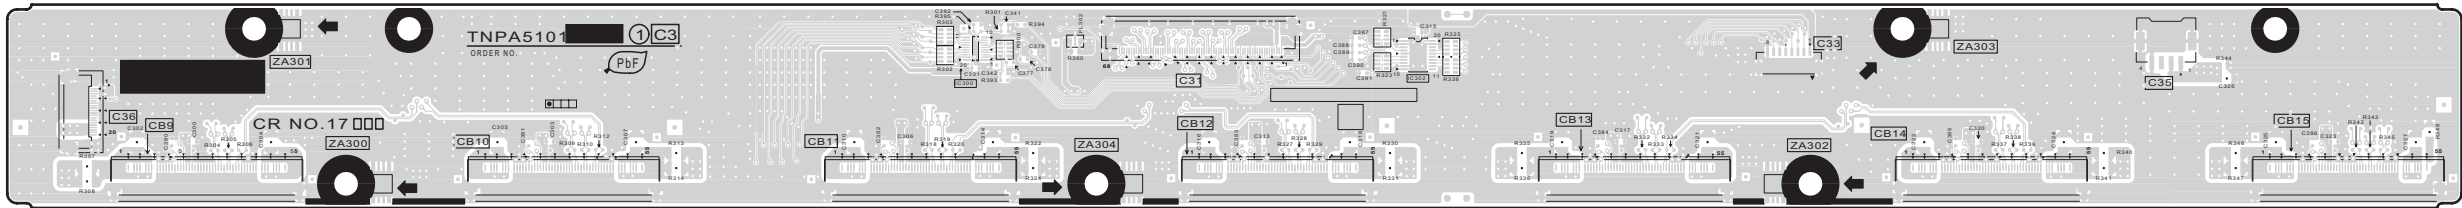

14.8. SC-Board

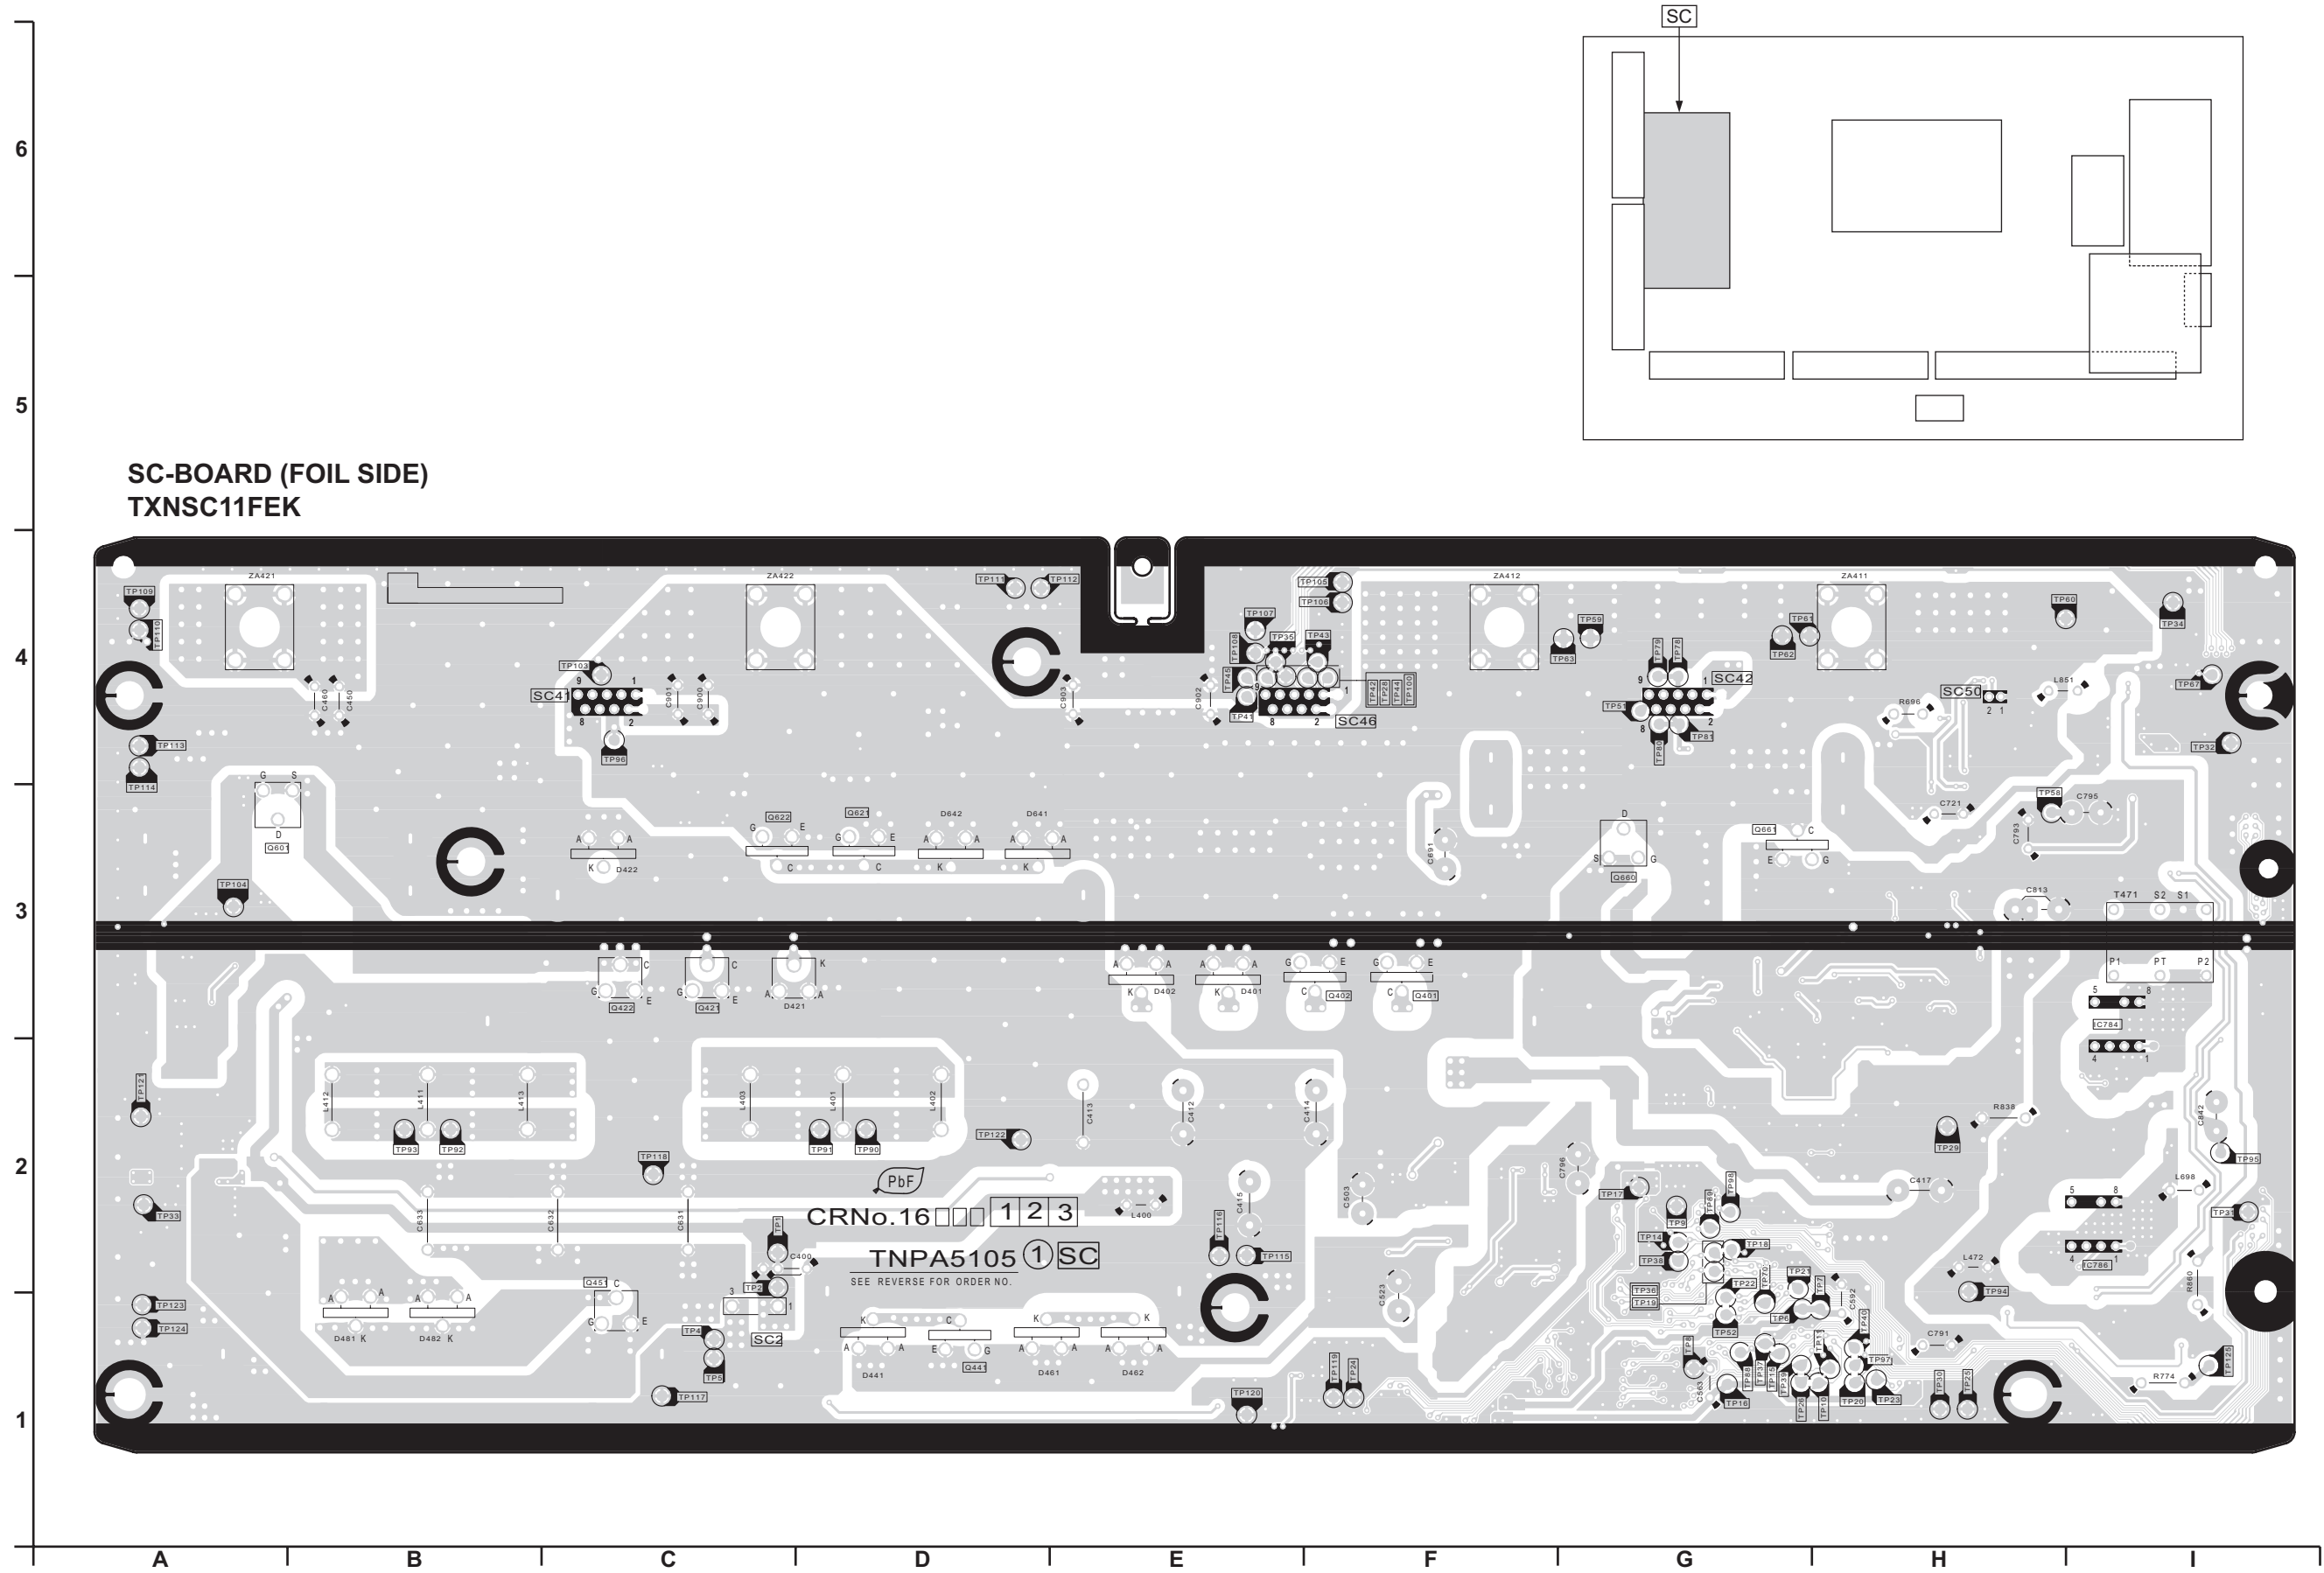

6

5


4

3

2

1

SC-BEARD (COMPONENT SIDE)
TXNSC11FEK

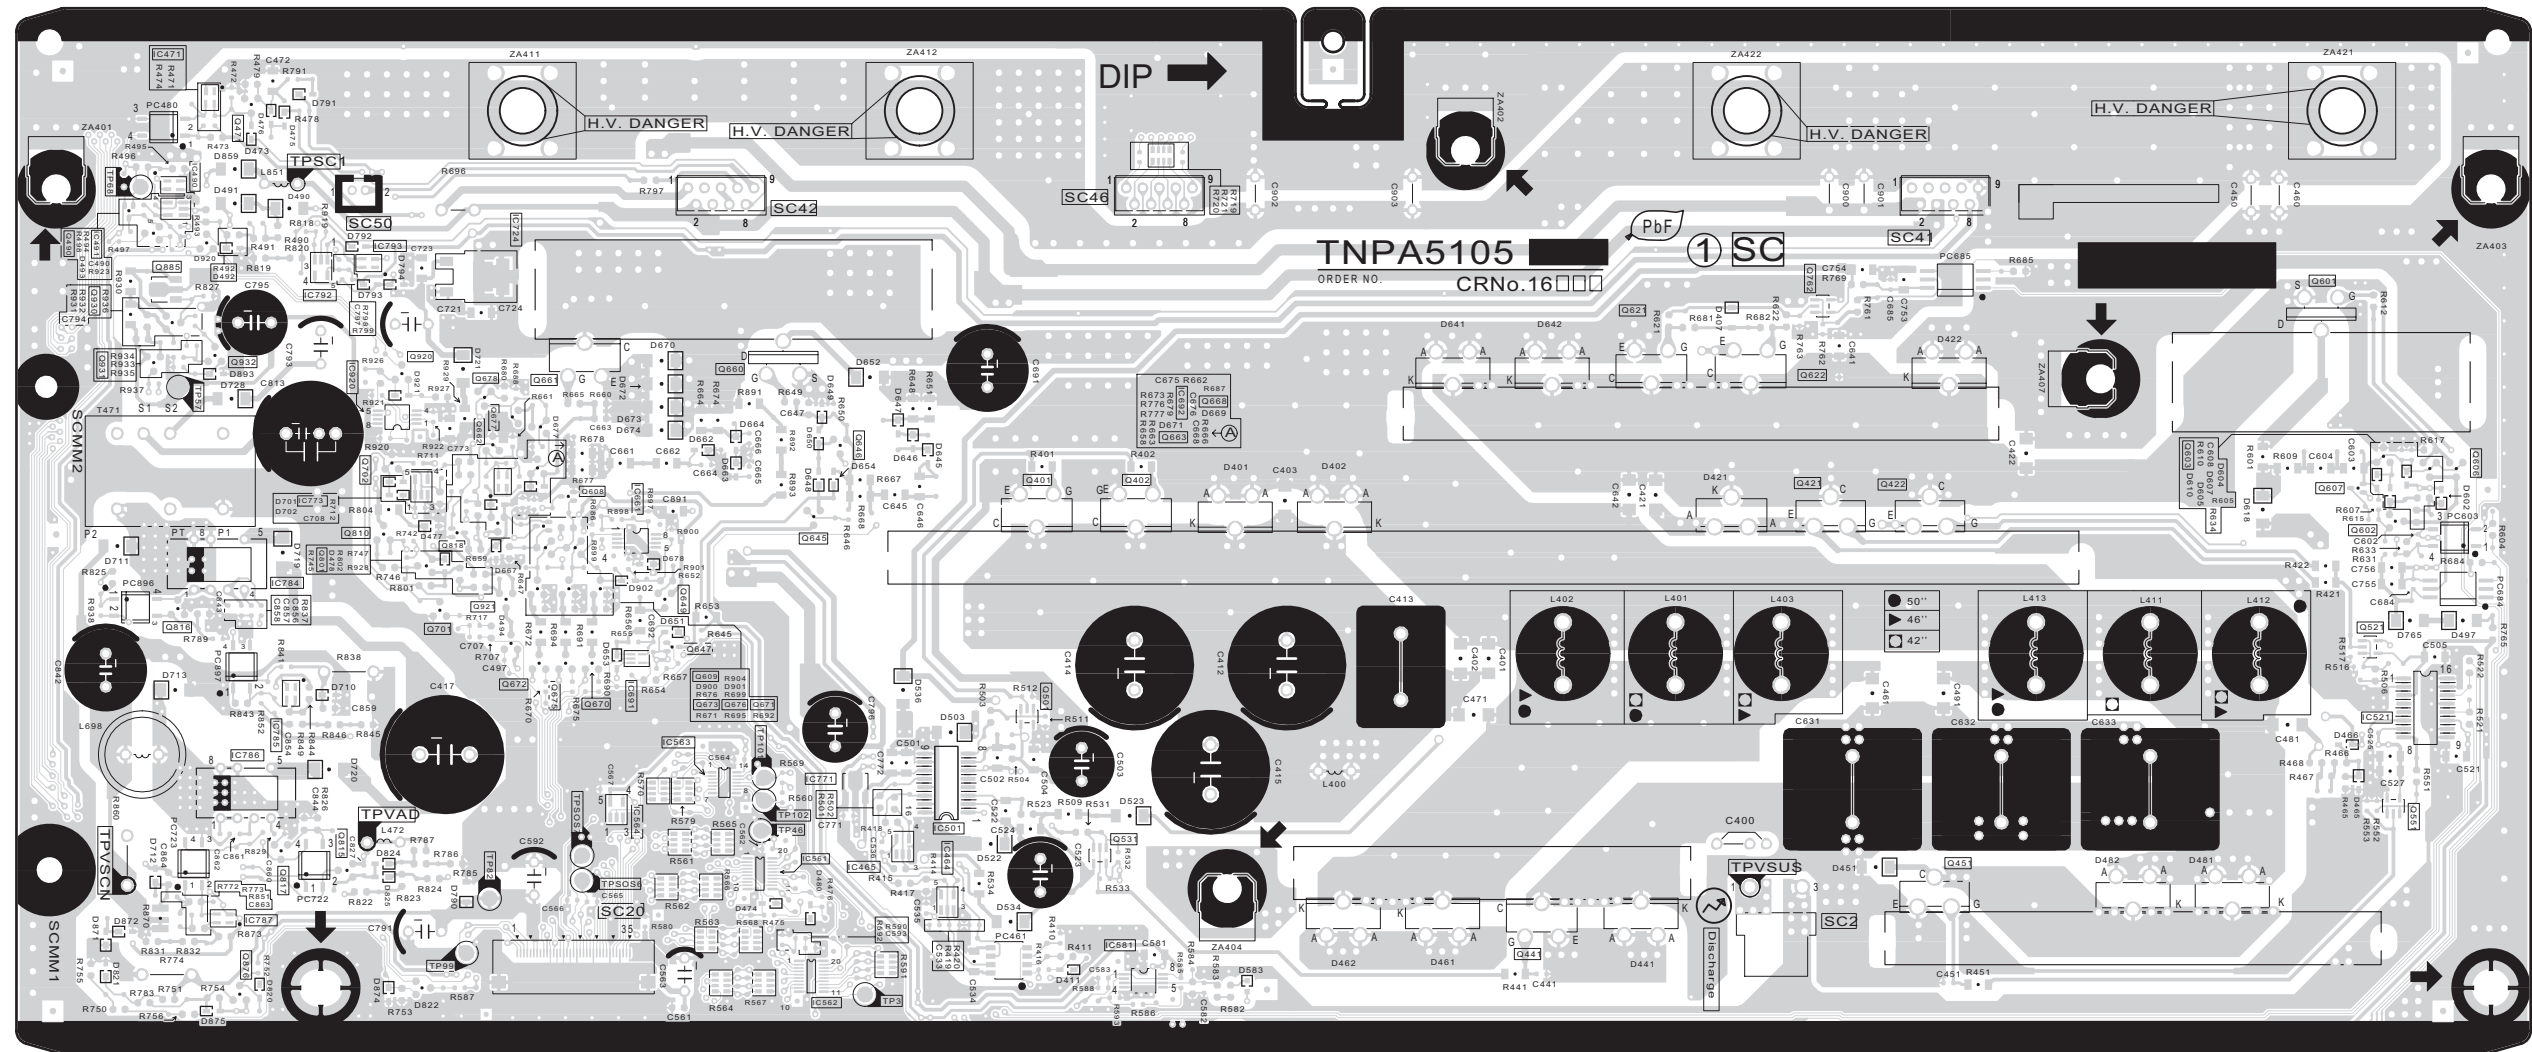

A

B

C

D


E

F

G



H

I

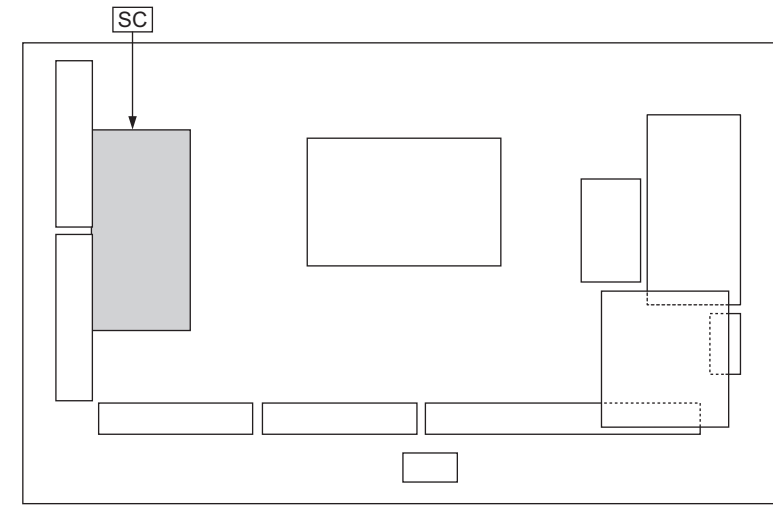

14.9. SS-Board

SS-BOARD (FOIL SIDE)
TXNSS11FEK

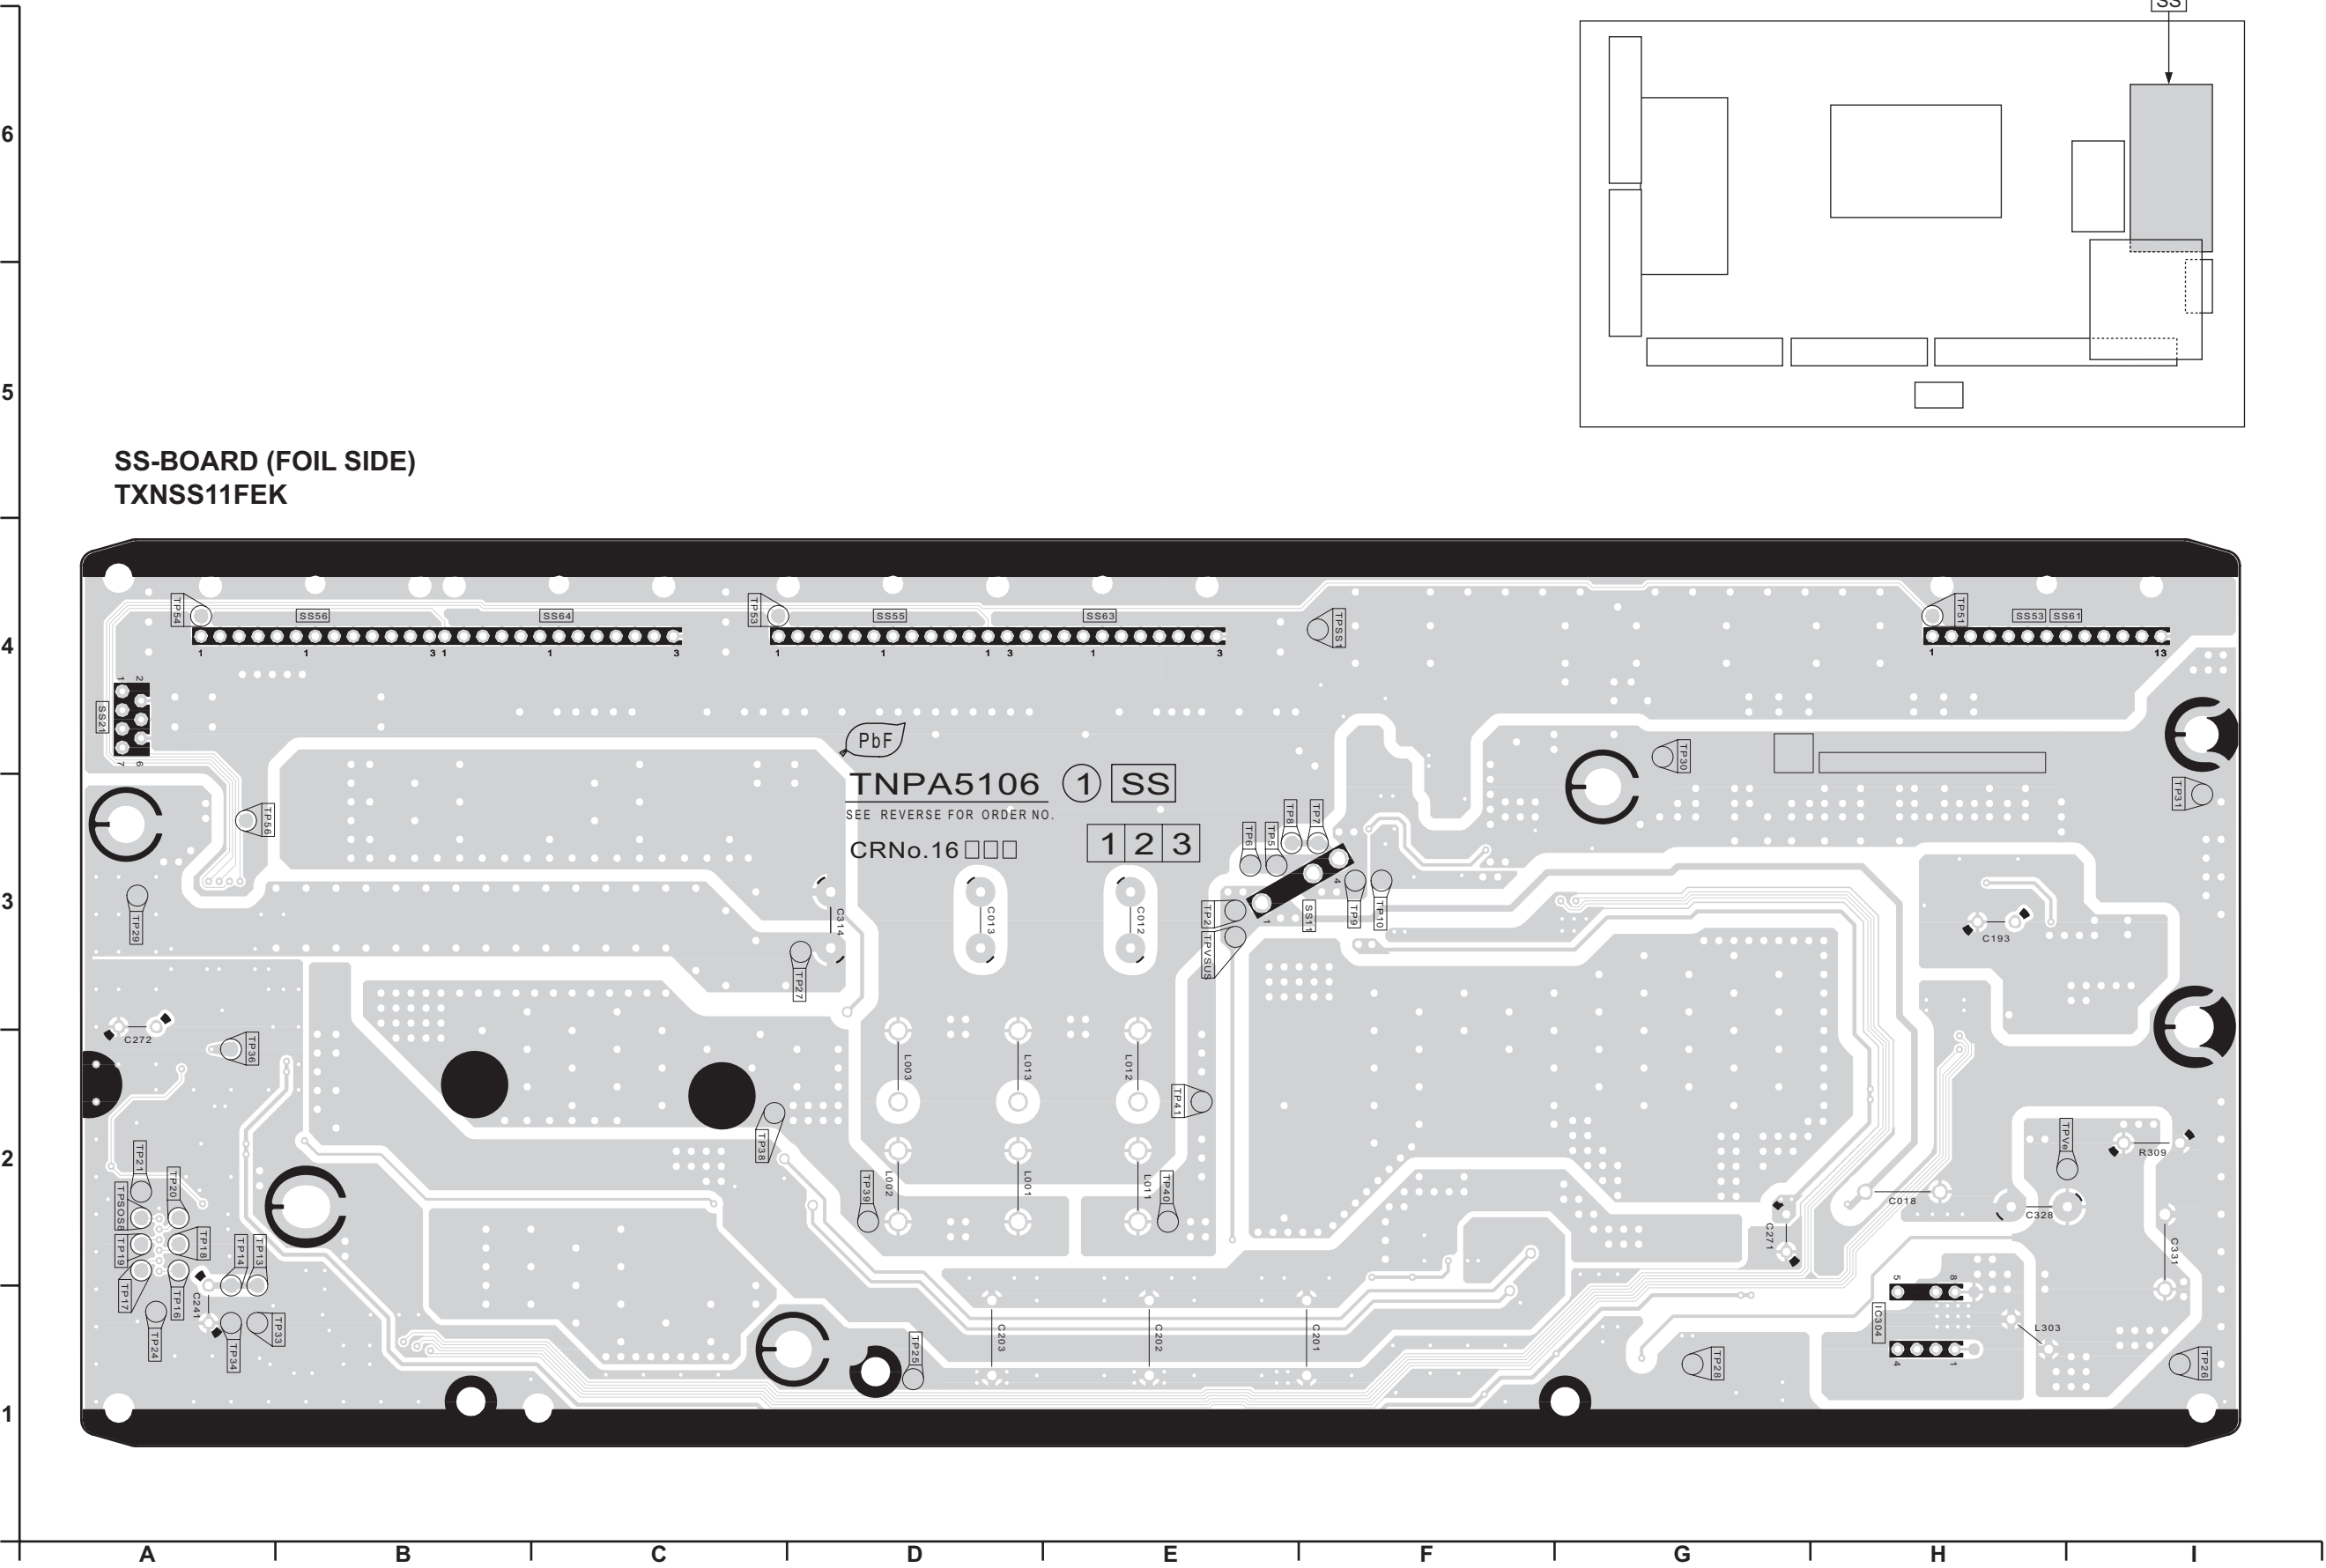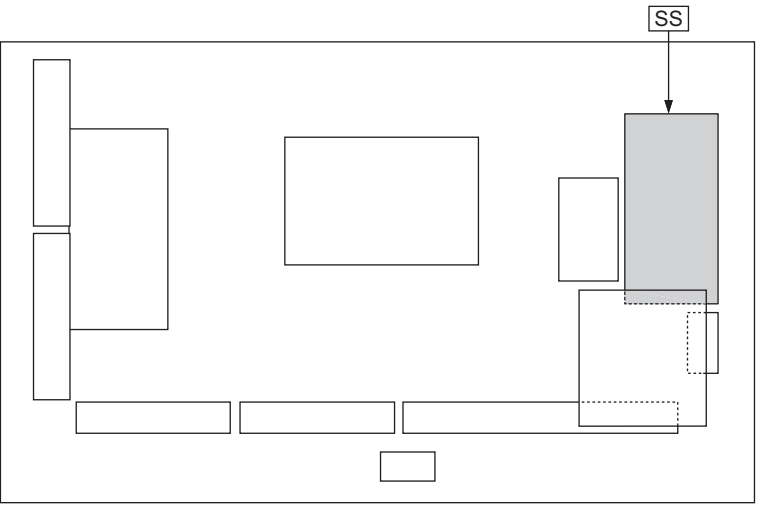


6
5
4
3
2
1




15 Exploded View and Replacement Parts List

15.1. Exploded View and Mechanical Replacement Parts List


15.1.1. Exploded View 1

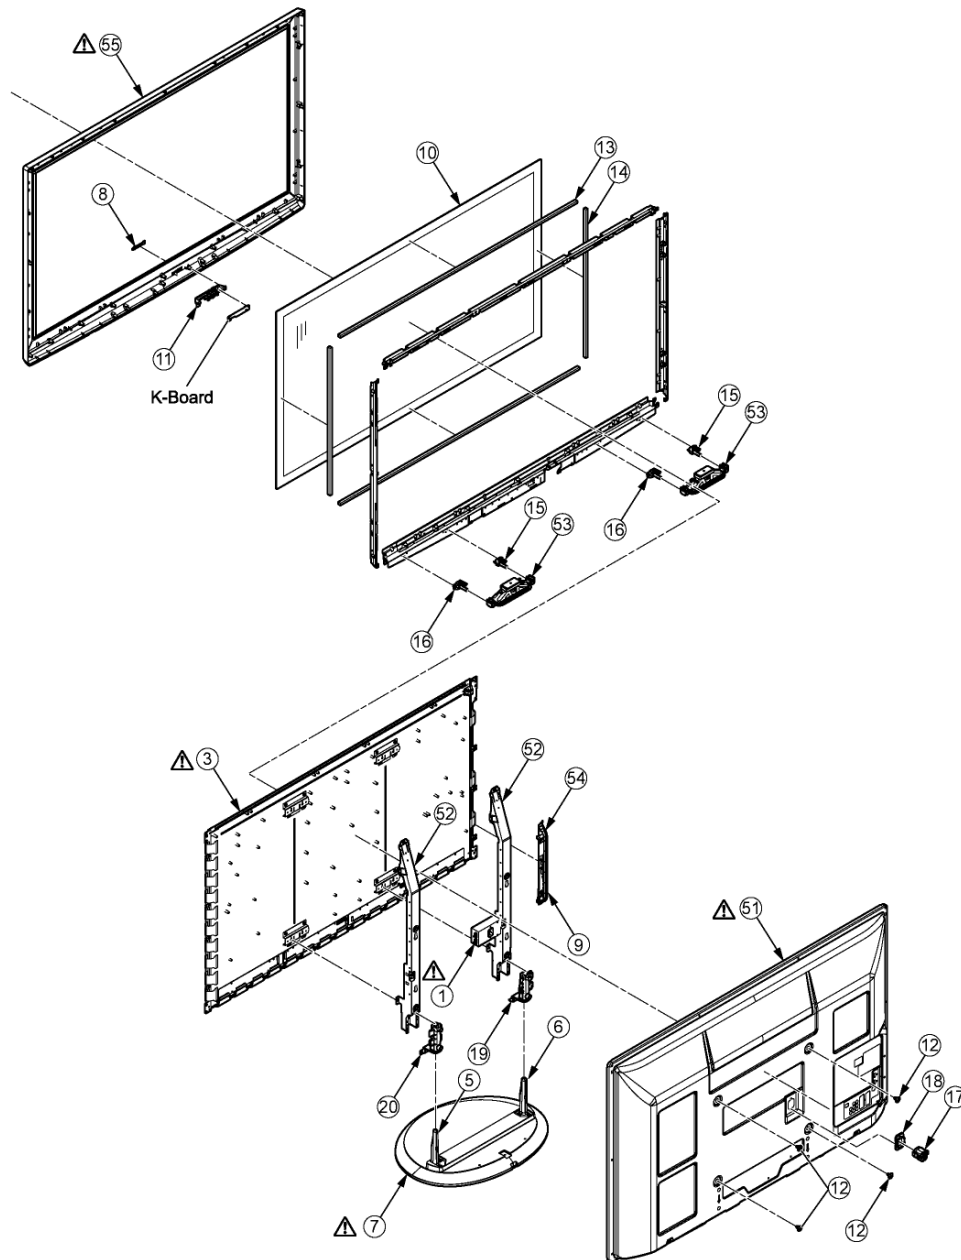


15.1.2. Exploded View 2

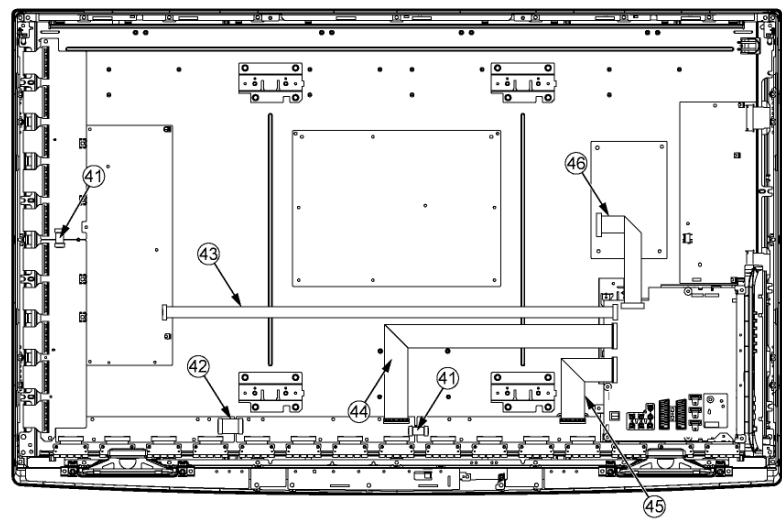

15.1.3. Packing 1

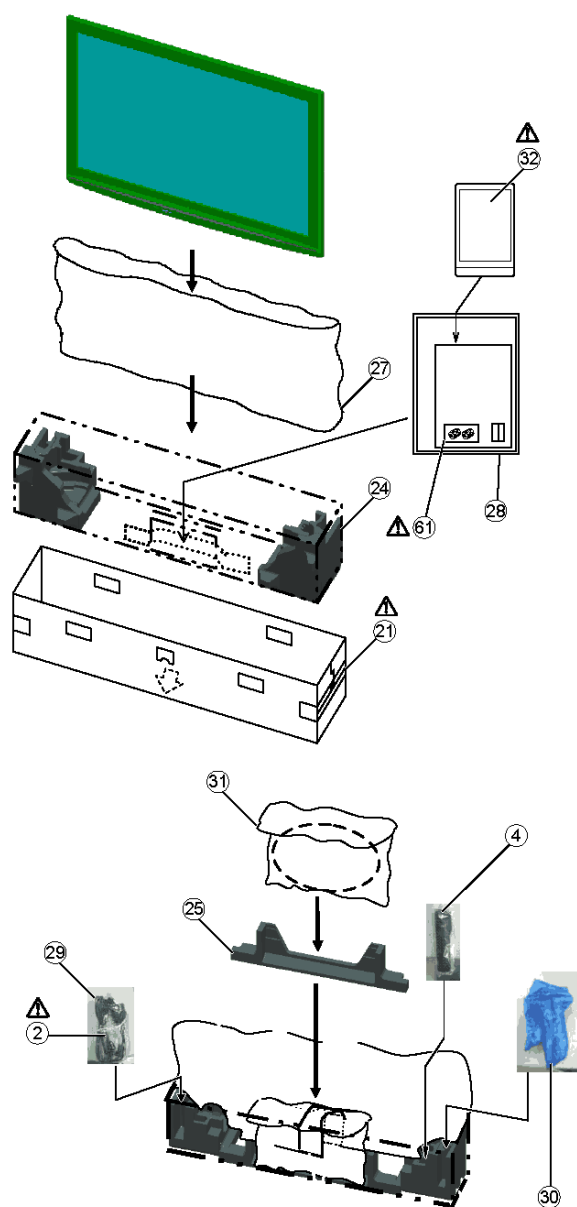



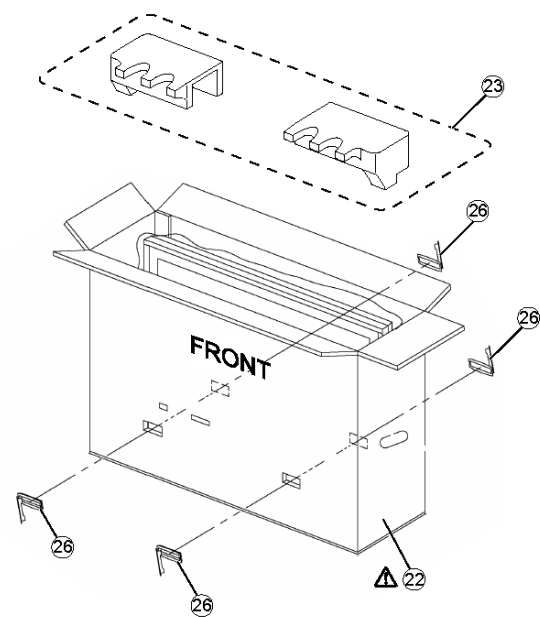







15.1.4. Packing 2



15.1.5. Mechanical Replacement Parts List

Note: All parts except parts mentioned [PAVCCZ] in the Remarks column are supplied by AVC-CSPC.
Parts mentioned [PAVCCZ] are supplied by PAVCCZ.

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	61	J0KG00000146	FERRITE CORE PACK	1	
	1	K2AHYH000033	AC INLET WITH CABLE	1	PAVCCZ
	2	K2CT3YY00021	AC CORD	1	PAVCCZ
	3	MD50F13C1Z	PLASMA DISPLAY PANEL	1	PAVCCZ
	4	N2QAYB000487	REMOTE CONTROL	1	PAVCCZ
	5	TBLA3679	STAND POLE R	1	
	6	TBLA3680	STAND POLE L	1	
	7	TBLX0139	PEDESTAL STAND(ROUND BLACK)	1	PAVCCZ
	8	TBMA352	PANASONIC SHEET BADGE	1	PAVCCZ
	9	TBX3EA00401	POWER BUTTON	1	
		THEJ0339	SCREW(TU:1 SIDE_COVER:4 2ND-TU:1 LAN:1)	7	
		THEL052Z	SCREW (BC TOP:4)	2	
		THEL080N	PF SCREW(5x30)	4	
		THTD020J	SCREW(A-PRINT:4)	9	
		THTF011N	SCREW	12	
		THTF011N	SCREW(SC:7 SS:8 SUSD:3 K-P:4)	22	
		THTF011N	SCREW(DD:30 C:13)	43	
	10	TKGA5642-1	FRONT GLASS	1	PAVCCZ
	11	TKK3EC5009	LED PANEL	1	PAVCCZ
	12	TKKL5493	M8 CAP	4	
	13	TMK0EG016	SPONGE(FRONT GLASS/UPPER/BOTTOM)	2	PAVCCZ
	14	TMK0EG017	SPONGE(FRONT GLASS/LEFT/RIGHT)	2	PAVCCZ
		TMM23417	CLAMPER	2	
		TMME292	CLAMPER	3	
		TMME308	CLAMPER(A-PRINT:2)	2	
		TMME331	CLAMPER(P:1)	1	
		TMME332	CLAMPER(HANGER:4)	4	
		TMME332	CLAMPER(SS:2)	2	
		TMME332	CLAMPER	1	
		TMME379	SPACER	2	
		TMME391	SPACER	2	PAVCCZ
	15	TMW3EX002	SP BRACKET L	2	
	16	TMW3EX003	SP BRACKET R	2	
	17	TMXX064	AC CORD CLAMPER A	1	
	18	TMXX065	AC CORD CLAMPER B	1	
	19	TMZX5176	STAND BRACKET-L	1	
	20	TMZX5177	STAND BRACKET-R	1	
	21	TPC0E53901	CARTON BOX BOTTOM	1	PAVCCZ
	22	TPC0E68703A	CARTON BOX TOP	1	PAVCCZ
	23	TPD0E1122	TOP CUSHION	1	PAVCCZ
	24	TPD0E2119	BOTTOM CUSHION	1	PAVCCZ
	25	TPD0E2120	PEDESTAL CUSHION	1	PAVCCZ
	26	TPD169487	JOINT	4	

Safety	Ref. No.	Part No.	Part Name & Description	Q'ty	Remarks
	27	TPE0E4010	PROTECT COVER	1	PAVCCZ
	28	TPE0E9002	ACCESSORIES BAG	1	PAVCCZ
	29	TPE0E9003	BAG FOR AC CORD	1	PAVCCZ
	30	TPEB340	BAG (STAND ACCESSORY)	1	
	31	TPEB367-1	BAG (PEDESTAL STAND)	1	
		TPG0E9321	PAPER CAP	0.25	PAVCCZ
	32	TQB0E0935	INSTRUCTION BOOK (ENGLISH)	1	PAVCCZ
		TQZJ203	SCREW USE HANDBILL	1	
	41	TSXL519	CABLE (C26-C36/SU11-SD11)	2	
	42	TSXL724	CABLE (C10-C20)	1	
	43	TSXM071	CABLE (A20-SC20)	1	PAVCCZ
	44	TSXM024	CABLE (C11-A31)	1	PAVCCZ
	45	TSXM025	CABLE (C21-A32)	1	PAVCCZ
	46	TSXM026	CABLE (XW3-A88A)	1	PAVCCZ
	51	TTU0E0741	REAR COVER	1	PAVCCZ
	52	TUX0E154	50HANGER METAL	2	PAVCCZ
	53	TXFEA01LWUE	SPEAKER ASSY	2	PAVCCZ
	54	TXFKP01LHUB	SIDE TERMINAL COVER ASSY	1	PAVCCZ
	55	TXFKY01MHUE	CABINET ASSY	1	PAVCCZ
		TXJA11LUUB	SPEAKER LEAD (A11-SPL/SPR)	1	PAVCCZ
		TXJTNRLHUB	RF CABLE	1	PAVCCZ
		XSB3+6FJ	SCREW (HDMI:3)	3	
		XSB4+6FN	BIND SCREW	2	
		XTB4+12GFJ	SCREW (GH:20 PW:2 LED:1)	22	
		XTB4+12GFJK	SCREW (BC:11)	11	
		XTB4+12GFN	SCREW (4*12)	4	
		XTV3+10JFJK	SCREW (REAR AV:2)	2	
		XYN3+F10FJK	SCREW (BC-AC_INLET:2)	2	
		XYN3+F8FJ	SCREW (2ND-TUNER ASSY:2)	2	
		XYN3+J10FJ	SCREW	17	
		XYN4+E6FJ	SCREW (INLET:1)	1	
		XYN4+F10FJ	SCREW	6	
		XYN4+F10FJ	SCREW (HANGER METAL ASSY:4)	4	
		XYN4+F10FJ	SCREW (SP BRKT:4)	4	
		XYN4+F10FJ	SCREW (AL-GHT:4)	4	
		XYN4+F10FJ	SCREW (SUSD:4)	4	
		XYN4+F10FJ	SCREW (KARI-HANGER METAL:4)	4	
		XYN5+F18FN	SCREW (STAND POLE)	4	
		XZB17X19C03	POLY BAG (STAND POLE)	1	
		XZB7.5X9D05	POLY BAG (SCREW)	1	
		XZBT6506	POLY BAG (INSTRUCTION BOOK)	1	

15.2. Electrical Replacement Parts List

15.2.1. Replacement Parts List Notes

RTL (Retention Time Limited)

Note: The marking (RTL) indicates that the Retention Time is Limited for this item.
After the discontinuation of this assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependant on the type of assembly, and in accordance with the laws governing part and product retention.
After the end of this period, the assembly will no longer be available.

Abbreviation of part name and description

1. Resistor

Example:

ERD25TJ104 C 100KOHM, J, 1/4W
Type Allowance

2. Capacitor

Example:

ECKF1H103ZF C 0.01UF, Z, 50V
Type Allowance

Type	Allowance
C : Carbon	F : ±1%
F : Fuse	G : ±2%
M : Metal Oxide	J : ±5%
Metal Film	K : ±10%
S : Solid	M : ±20%
W : Wire Wound	

Type	Allowance
C : Ceramic	C : ±0.25pF
E : Electrolytic	D : ±0.5pF
P : Polyester	F : ±1pF
Polyprop	G : ±3pF
lene	J : ±5pF
T : Tantalum	K : ±10pF
	L : ±15pF
	M : ±20pF
	P : +100%, -0%
	Z : +80%, -20%

15.2.2. Electrical Replacement Parts List

Note: All parts except parts mentioned [PAVCCZ] in the Remarks column are supplied by AVC-CSPC.
Parts mentioned [PAVCCZ] are supplied by PAVCCZ.

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
⚠	PCB	ETX2MM806MEH	CIRCUIT BOARD P	1	(RTL) PA VCCZ
⚠	PCB	A-P50S20B	CIRCUIT BOARD A	1	(RTL) PA VCCZ
⚠	PCB	TXNXW1LHUB	CIRCUIT BOARD XW	1	(RTL) PA VCCZ
⚠	PCB	TXN/K1LWUE	CIRCUIT BOARD K	1	(RTL) PA VCCZ
⚠	PCB	TNPA5099	CIRCUIT BOARD C1	1	(RTL)
⚠	PCB	TNPA5100	CIRCUIT BOARD C2	1	(RTL)
⚠	PCB	TNPA5101	CIRCUIT BOARD C3	1	(RTL)
⚠	PCB	TXNSC11FEK	CIRCUIT BOARD SC	1	(RTL) PA VCCZ
⚠	PCB	TXNSD11FEK	CIRCUIT BOARD SD	1	PAVCCZ
⚠	PCB	TXNSS11FEK	CIRCUIT BOARD SS	1	(RTL) PA VCCZ
⚠	PCB	TNPA4804	CIRCUIT BOARD SS2	1	(RTL)
⚠	PCB	TXNSU11FEK	CIRCUIT BOARD SU	1	PAVCCZ
	A1	K1KA11B00092	11P CONNECTOR	1	
	A6	K1KA11BA0107	11P CONNECTOR	1	PAVCCZ
	A7	K1KY14AA0719	14P CONNECTOR	1	PAVCCZ
	A11	K1KA04AA0728	4P CONNECTOR	1	
	A20	K1MY35BA0345	35P CONNECTOR	1	
	A31	K1MY68BA0345	68P CONNECTOR	1	
	A32	K1MY68BA0345	68P CONNECTOR	1	
	A88A	K1KY30AA0369	30P CONNECTOR	1	
	C1009	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1010	F1J1E105A231	C 1 UF 25V	1	
	C1102	F1J1A106A087	C 0.010UF, K, 10V	1	
	C1103	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1104	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1106	F1H1H270A971	C 27UF, 50V	1	
	C1107	F1G1H220A731	C 22UF, 50V	1	
	C1108	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1109	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C1111	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C1112	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1114	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1117	F1G1C104A116	C 0.10UF, K, 16V	1	
	C1122	F1G1E103A123	C 0.010UF, K, 25V	1	
	C1123	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C2055	F1J1A106A087	C 0.010UF, K, 10V	1	
	C2057	F1J1A106A087	C 0.010UF, K, 10V	1	
	C2067	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2068	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2069	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2070	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2071	EEHBOJ101UR	C 100PF, J, 6.3V	1	
	C2072	EEHBOJ101UR	C 100PF, J, 6.3V	1	
	C2073	F1G1E333A091	C 0.033UF, K, 25V	1	
	C2074	F1G1E333A091	C 0.033UF, K, 25V	1	
	C2075	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2076	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2077	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2078	F1G1A105A047	C 1UF, K, 10V	1	
	C2079	F1G1C103A116	C 0.010UF, K, 16V	1	
	C2104	F1G1H100A731	C 10PF, K, 50V	1	
	C2107	F1G1A105A047	C 1UF, K, 10V	1	
	C2108	F1G1A105A047	C 1UF, K, 10V	1	
	C2110	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2301	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2302	F1G1C104A116	C 0.10UF, K, 16V	1	
	C2303	F1K1E106A136	C 10UF, Z, 25V	1	
	C2304	F1J1E105A231	C 1 UF 25V	1	
	C2305	F1G1H102A730	C 1000UF, 50V	1	
	C2306	F1J1E105A231	C 1 UF 25V	1	
	C2307	F1J1E105A231	C 1 UF 25V	1	
	C2308	F1J1E105A231	C 1 UF 25V	1	
	C2311	F1K1E106A136	C 10UF, Z, 25V	1	
	C2313	F1G1H102A730	C 1000UF, 50V	1	
	C2314	F1J1E105A231	C 1 UF 25V	1	
	C2315	F1K1E106A136	C 10UF, Z, 25V	1	
	C2316	F1H1H104A970	C 0.1UF, K, 50V	1	
	C2317	F1J1E105A231	C 1 UF 25V	1	
	C2318	F1H1H104A970	C 0.1UF, K, 50V	1	
	C2319	F1K1E106A136	C 10UF, Z, 25V	1	
	C2320	F1J1E105A231	C 1 UF 25V	1	
	C2321	F1H1H104A970	C 0.1UF, K, 50V	1	
	C2322	F1K1E106A136	C 10UF, Z, 25V	1	
	C2323	F1H1H104A970	C 0.1UF, K, 50V	1	
	C2324	F1J1E105A231	C 1 UF 25V	1	
	C2325	F1G1H102A730	C 1000UF, 50V	1	
	C2334	F1J1H474A757	C 0.47UF, 50V	1	
	C2335	F1H1E104A129	C 0.1UF, 25V	1	
	C2336	F1H1E104A129	C 0.1UF, 25V	1	
	C2337	F1J1H474A757	C 0.47UF, 50V	1	
	C2338	F1H1E104A129	C 0.1UF, 25V	1	
	C2339	F1H1E104A129	C 0.1UF, 25V	1	
	C2340	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2341	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2342	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2343	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2344	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2345	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2346	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2347	F1H1H223A970	C 0.22UF, K, 50V	1	
	C2349	F1G1H102A730	C 1000UF, 50V	1	
	C2351	F1G1H102A730	C 1000UF, 50V	1	
	C2353	F1G1H102A730	C 1000UF, 50V	1	
	C2355	F1G1H102A730	C 1000UF, 50V	1	
	C2510	F1H1H103A970	C 0.001UF, K, 50V	1	
	C2511	F1J1A106A087	C 0.010UF, K, 10V	1	
	C2515	F1H1H103A970	C 0.001UF, K, 50V	1	
	C2521	F1H1C104A143	C 0.1UF, K, 16V	1	
	C2752	F1G1E103A123	C 0.010UF, K, 25V	1	
	C2753	F1G1A105A047	C 1UF, K, 10V	1	
	C2756	F1K1E106A136	C 10UF, Z, 25V	1	
	C2757	F1G1E103A123	C 0.010UF, K, 25V	1	
	C2758	F2H1E470A007	E 47UF, 25V	1	
	C2759	F1J1E105A231	C 1 UF 25V	1	
	C2760	F2G1C100A022	C 10UF J 16V	1	
	C2905	F2H1A101A009	E 100 UF, 10V	1	PAVCCZ

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C2907	FI61C104A116	C 0.10UF, K, 16V	1	
	C2908	FIH1C104A143	C 0.1UF, K, 16V	1	
	C2909	FIH1C104A143	C 0.1UF, K, 16V	1	
	C2910	FIH1C104A143	C 0.1UF, K, 16V	1	
	C2911	FI61C104A116	C 0.10UF, K, 16V	1	
	C2917	FIH1H222A970	C 2200PF, K, 50V	1	
	C2950	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C2951	FIH1A225A051	C 22UF, 50V	1	
	C2959	FI61C104A116	C 0.10UF, K, 16V	1	
	C2961	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C3002	FI61H561A730	C 56UF, 50V	1	
	C3003	FI61H561A730	C 56UF, 50V	1	
	C3004	FI61H561A730	C 56UF, 50V	1	
	C3005	FI61H561A730	C 56UF, 50V	1	
	C3007	FI61H561A730	C 56UF, 50V	1	
	C3008	FI61H561A730	C 56UF, 50V	1	
	C3009	FI61H561A730	C 56UF, 50V	1	
	C3010	FI61H561A730	C 56UF, 50V	1	
	C3011	FI61H561A730	C 56UF, 50V	1	
	C3012	FI61H561A730	C 56UF, 50V	1	
	C3013	FI61H561A730	C 56UF, 50V	1	
	C3014	FI61H561A730	C 56UF, 50V	1	
	C3018	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3019	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3020	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3021	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3022	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C3024	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C3025	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C3026	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C3027	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3028	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3029	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3030	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3039	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C3041	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C3043	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C3044	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C3046	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C3047	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C3048	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C3049	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C3064	FI61H102A730	C 1000UF, 50V	1	
	C3065	FI61H102A730	C 1000UF, 50V	1	
	C3070	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3071	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3072	FI61C104A116	C 0.10UF, K, 16V	1	
	C3073	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3078	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3083	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3084	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3085	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3086	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3087	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3088	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3089	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3090	FIJ1A106A087	C 0.010UF, K, 10V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C3091	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3092	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3095	F2H1A101A009	E 100 UF, 10V	1	PAVCCZ
	C3097	F2H1A101A009	E 100 UF, 10V	1	PAVCCZ
	C3099	FI61H561A730	C 56UF, 50V	1	
	C3102	F2H1A101A009	E 100 UF, 10V	1	PAVCCZ
	C3103	F2H1A101A009	E 100 UF, 10V	1	PAVCCZ
	C3114	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3115	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3116	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3117	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3138	F2H1A101A009	E 100 UF, 10V	1	PAVCCZ
	C3139	FI61C104A116	C 0.10UF, K, 16V	1	
	C3140	FI61C104A116	C 0.10UF, K, 16V	1	
	C3141	FI61C104A116	C 0.10UF, K, 16V	1	
	C3143	FI61C104A116	C 0.10UF, K, 16V	1	
	C3144	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3145	FI61C104A116	C 0.10UF, K, 16V	1	
	C3146	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3147	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C3257	FI61H561A730	C 56UF, 50V	1	
	C3752	FIJ1H102A836	C 1000PF, 50V	1	
	C4546	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
	C4548	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
	C4660	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
	C4661	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
	C4662	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
	C4663	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
	C4664	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
	C4665	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
	C4666	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
	C4667	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
	C4701	FI61C104A116	C 0.10UF, K, 16V	1	
	C4702	FI61C104A116	C 0.10UF, K, 16V	1	
	C4704	FI61C104A116	C 0.10UF, K, 16V	1	
	C4705	FI61C104A116	C 0.10UF, K, 16V	1	
	C4707	FI61C104A116	C 0.10UF, K, 16V	1	
	C4708	FI61C104A116	C 0.10UF, K, 16V	1	
	C4713	FI61C104A116	C 0.10UF, K, 16V	1	
	C4715	FI61C104A116	C 0.10UF, K, 16V	1	
	C4717	FIJ1A106A087	C 0.010UF, K, 10V	1	
	C4718	FIJ1A475A087	C 4.7UF, K, 10V	1	
	C4719	FI61C104A116	C 0.10UF, K, 16V	1	
	C4721	FI61C104A116	C 0.10UF, K, 16V	1	
	C4724	FI61C104A116	C 0.10UF, K, 16V	1	
	C5251	FIJ1E105A231	C 1 UF 25V	1	
	C5253	FIJ1E105A231	C 1 UF 25V	1	
	C5255	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C5256	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C5293	FIJ1E105A231	C 1 UF 25V	1	
	C5294	FIH1C105A145	C 0.01UF, K, 16V	1	
	C5310	FK1E106A136	C 10UF, Z, 25V	1	
	C5311	FK1E106A136	C 10UF, Z, 25V	1	
	C5431	FI61C104A116	C 0.10UF, K, 16V	1	
	C5432	FI61C104A116	C 0.10UF, K, 16V	1	
	C5435	FI61C104A116	C 0.10UF, K, 16V	1	
	C5436	FI61C104A116	C 0.10UF, K, 16V	1	
	C5437	FI61C104A116	C 0.10UF, K, 16V	1	
	C5438	FI61C104A116	C 0.10UF, K, 16V	1	
	C5470	FI61C103A116	C 0.010UF, K, 16V	1	
	C5471	FI61A473A053	C 0.47UF, 10V	1	
	C5473	FI61E103A123	C 0.010UF, K, 25V	1	
	C5474	FI61C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C5475	F1G1A4740003	C0.047UF, K, 10V	1	
	C5482	F2G1A221A149	E 220UF, 10V	1	
	C5485	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5487	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
	C5488	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
	C5490	F1G1C104A116	C 0.10UF, K, 16V	1	
	C5500	F1G1E682A123	C 6800UF, Z, 25V	1	
	C5501	F1G1A154A053	C0.015UF, K, 10V	1	
	C5502	F1J1A475A087	C 4.7UF, K, 10V	1	
	C5503	F1H1C105A145	C 0.01UF, K, 16V	1	
	C5504	F1G1E682A123	C 6800UF, Z, 25V	1	
	C5505	F1J1A475A087	C 4.7UF, K, 10V	1	
	C5506	F1H1C105A145	C 0.01UF, K, 16V	1	
	C5507	F1G1A393A053	C0.015UF, K, 10V	1	
	C5508	F1H1C104A143	C 0.1UF, K, 16V	1	
	C5509	F1H1C104A143	C 0.1UF, K, 16V	1	
	C5510	F1H1C104A143	C 0.1UF, K, 16V	1	
	C5511	F1H1C104A143	C 0.1UF, K, 16V	1	
	C5516	F1K1E106A136	C 10UF, Z, 25V	1	
	C5517	F1K1E106A136	C 10UF, Z, 25V	1	
	C5519	F1K1E106A136	C 10UF, Z, 25V	1	
	C5520	F1K1E106A136	C 10UF, Z, 25V	1	
	C5521	F1K1E106A136	C 10UF, Z, 25V	1	
	C5522	F1K1E106A136	C 10UF, Z, 25V	1	
	C5523	F1K1E106A136	C 10UF, Z, 25V	1	
	C5526	F1K1E106A136	C 10UF, Z, 25V	1	
	C5528	F1K0J226A008	C 22UF, K, 6.3V	1	
	C5529	F1K0J226A008	C 22UF, K, 6.3V	1	
	C5530	F1K0J226A008	C 22UF, K, 6.3V	1	
	C5531	F1K0J226A008	C 22UF, K, 6.3V	1	
	C5532	F1K0J226A008	C 22UF, K, 6.3V	1	
	C5533	F1K0J226A008	C 22UF, K, 6.3V	1	
	C5534	F1K0J226A008	C 22UF, K, 6.3V	1	
	C5535	F1K0J226A008	C 22UF, K, 6.3V	1	
	C5536	F1K0J226A008	C 22UF, K, 6.3V	1	
	C5537	F1K0J226A008	C 22UF, K, 6.3V	1	
	C5538	F1K0J226A008	C 22UF, K, 6.3V	1	
	C5539	F1K0J226A008	C 22UF, K, 6.3V	1	
	C5603	F1G1H102A730	C 1000UF, 50V	1	
	C5615	F1H1A225A051	C 22UF, 50V	1	
	C5616	F1G1E103A123	C 0.010UF, K, 25V	1	
	C5649	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C5650	F1H1A225A051	C 22UF, 50V	1	
	C5651	F1J1A475A087	C 4.7UF, K, 10V	1	
	C5652	F1H0J475A041	C 4.7UF, K, 16V	1	
	C5719	F1J1A106A087	C 0.010UF, K, 10V	1	
	C5720	F1J1A106A087	C 0.010UF, K, 10V	1	
	C5724	F1H1E104A129	C 0.1UF, 25V	1	
	C5725	F1G1E682A123	C 6800UF, Z, 25V	1	
	C5726	F1G1E103A123	C 0.010UF, K, 25V	1	
	C5728	F1J1A106A087	C 0.010UF, K, 10V	1	
	C5729	F1J1A106A087	C 0.010UF, K, 10V	1	
	C6700	F1H1E104A129	C 0.1UF, 25V	1	
	C6701	F1H1E104A129	C 0.1UF, 25V	1	
	C6702	F1H1E104A129	C 0.1UF, 25V	1	
	C6853	F1H1E104A129	C 0.1UF, 25V	1	
	C6854	F1H1E104A129	C 0.1UF, 25V	1	
	C6862	F1H1E104A129	C 0.1UF, 25V	1	
	C6883	F1J1A106A087	C 0.010UF, K, 10V	1	
	C6888	F1K1E106A136	C 10UF, Z, 25V	1	
	C6889	F1K0J1060020	C 10UF, K, 6.3V	1	
	C6890	F1K1E106A136	C 10UF, Z, 25V	1	
	C6891	F1K0J1060020	C 10UF, K, 6.3V	1	
	C6892	F1H1H103A970	C 0.001UF, K, 50V	1	
	C6893	F1H1E104A129	C 0.1UF, 25V	1	
	C6895	F1H1E153A129	C 0.015UF, K, 25V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C6896	F1H1H103A970	C 0.001UF, K, 50V	1	
	C6897	F1K0J1060020	C 10UF, K, 6.3V	1	
	C6898	F1H1H821A970	C 820 PF, K, 50V	1	PAVCCZ
	C6899	F1J1A106A087	C 0.010UF, K, 10V	1	
	C6900	F1H1C104A143	C 0.1UF, K, 16V	1	
	C6901	F1G1A104A053	C 0.01UF, K, 10V	1	
	C6903	F1H1C104A143	C 0.1UF, K, 16V	1	
	C6936	F1G1H100A731	C 10PF, K, 50V	1	
	C6937	F1G1H100A731	C 10PF, K, 50V	1	
	C6938	F1G1C104A116	C 0.10UF, K, 16V	1	
	C6939	F1G1C104A116	C 0.10UF, K, 16V	1	
	C6940	F1G1C104A116	C 0.10UF, K, 16V	1	
	C6941	F1G1C104A116	C 0.10UF, K, 16V	1	
	C6942	F1H1A225A051	C 22UF, 50V	1	
	C6943	F1G1C104A116	C 0.10UF, K, 16V	1	
	C6944	F1G1C104A116	C 0.10UF, K, 16V	1	
	C6945	F1G1C104A116	C 0.10UF, K, 16V	1	
	C6946	F1G1C104A116	C 0.10UF, K, 16V	1	
	C6947	F1G1C104A116	C 0.10UF, K, 16V	1	
	C6948	F1G1C104A116	C 0.10UF, K, 16V	1	
	C6949	F1H1A225A051	C 22UF, 50V	1	
	C6950	F1G1C104A116	C 0.10UF, K, 16V	1	
	C6954	F1G1C104A116	C 0.10UF, K, 16V	1	
	C6955	F1G1C104A116	C 0.10UF, K, 16V	1	
	C6956	F1G1C104A116	C 0.10UF, K, 16V	1	
	C6957	F1G1C104A116	C 0.10UF, K, 16V	1	
	C6958	F1G1C104A116	C 0.10UF, K, 16V	1	
	C6959	F1G1C104A116	C 0.10UF, K, 16V	1	
	C6960	F1G1C104A116	C 0.10UF, K, 16V	1	
	C6961	F1G1C104A116	C 0.10UF, K, 16V	1	
	C6962	F1J1A106A087	C 0.010UF, K, 10V	1	
	C6963	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C6964	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C6965	F1H1E271A130	C 270PF, K, 25V	1	PAVCCZ
	C6966	F1H1E271A130	C 270PF, K, 25V	1	PAVCCZ
	C8000	F1J1A106A087	C 0.010UF, K, 10V	1	
	C8001	F1J1A106A087	C 0.010UF, K, 10V	1	
	C8002	ECGRLOG680ER	C 68UF, J, 4V	1	
	C8003	F1J1A106A087	C 0.010UF, K, 10V	1	
	C8004	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8005	F1J1A106A087	C 0.010UF, K, 10V	1	
	C8006	F1J1A106A087	C 0.010UF, K, 10V	1	
	C8008	F1J1A106A087	C 0.010UF, K, 10V	1	
	C8009	F1J1A106A087	C 0.010UF, K, 10V	1	
	C8010	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8011	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8012	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8013	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8015	F1J1A106A087	C 0.010UF, K, 10V	1	
	C8016	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8017	F1J1A106A087	C 0.010UF, K, 10V	1	
	C8018	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8019	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8020	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8021	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8022	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8023	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8024	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8025	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8027	F1G1A105A047	C 1UF, K, 10V	1	
	C8028	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8029	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8030	F1G1C104A116	C 0.10UF, K, 16V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C8031	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8033	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8034	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8035	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8036	FlG1A105A047	C 1UF, K, 10V	1	
	C8037	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8038	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8039	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8040	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8042	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8043	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8044	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8045	FlG1A105A047	C 1UF, K, 10V	1	
	C8046	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8048	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8049	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8050	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8051	FlG1A105A047	C 1UF, K, 10V	1	
	C8052	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8053	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8054	FlG1A105A047	C 1UF, K, 10V	1	
	C8055	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8056	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8057	FlG1A105A047	C 1UF, K, 10V	1	
	C8058	FlH0J475A041	C 4.7UF, K, 16V	1	
	C8059	FlH0J475A041	C 4.7UF, K, 16V	1	
	C8060	FlH0J475A041	C 4.7UF, K, 16V	1	
	C8061	FlJ1A106A087	C 0.010UF, K, 10V	1	
	C8062	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8063	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8064	FlG1A105A047	C 1UF, K, 10V	1	
	C8065	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8066	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8067	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8068	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8069	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8070	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8071	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8072	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8073	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8074	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8075	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8076	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8077	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8078	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8079	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8082	FlJ1A106A087	C 0.010UF, K, 10V	1	
	C8083	FlH0J475A041	C 4.7UF, K, 16V	1	
	C8084	FlJ1A106A087	C 0.010UF, K, 10V	1	
	C8085	FlJ1A106A087	C 0.010UF, K, 10V	1	
	C8087	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8088	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8089	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8090	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8091	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8092	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8094	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8096	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8099	FlJ1A106A087	C 0.010UF, K, 10V	1	
	C8100	FlJ1A106A087	C 0.010UF, K, 10V	1	
	C8101	FlJ1A106A087	C 0.010UF, K, 10V	1	
	C8102	FlJ1A106A087	C 0.010UF, K, 10V	1	
	C8103	FlJ1A106A087	C 0.010UF, K, 10V	1	
	C8104	FlJ1A106A087	C 0.010UF, K, 10V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C8105	FlJ1A106A087	C 0.010UF, K, 10V	1	
	C8106	FlH0J475A041	C 4.7UF, K, 16V	1	
	C8107	FlH0J475A041	C 4.7UF, K, 16V	1	
	C8108	FlJ1A106A087	C 0.010UF, K, 10V	1	
	C8109	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8110	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8111	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8112	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8113	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8114	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8115	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8116	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8117	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8119	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8120	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8121	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8122	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8123	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8124	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8126	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8127	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8128	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8129	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8130	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8131	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8132	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8133	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8134	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8136	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8137	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8138	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8139	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8140	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8141	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8142	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8143	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8144	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8145	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8146	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8147	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8148	FlG1A105A047	C 1UF, K, 10V	1	
	C8149	FlG1A105A047	C 1UF, K, 10V	1	
	C8150	FlG1H8R0A732	C 8.0UF, 50V	1	
	C8151	FlG1H8R0A732	C 8.0UF, 50V	1	
	C8154	FlG1C103A116	C 0.010UF, K, 16V	1	
	C8155	FlG1H150A731	C 15UF, 50V	1	
	C8156	FlG1HR50A577	C 0.50UF, 50V	1	
	C8157	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8158	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8159	FlJ1A106A087	C 0.010UF, K, 10V	1	
	C8160	ECJ1VF1A105Z	C 1UF, Z, 10V	1	
	C8240	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8241	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8242	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8243	FlG1H3R0A732	C 3.0PF, K, 50V	1	
	C8246	FlG1A105A047	C 1UF, K, 10V	1	
	C8247	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8248	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8249	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8250	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8251	ECGRLO680ER	C 68UF, J, 4V	1	
	C8252	FlJ1A106A087	C 0.010UF, K, 10V	1	
	C8253	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8254	FlG1A105A047	C 1UF, K, 10V	1	
	C8255	FlG1A105A047	C 1UF, K, 10V	1	
	C8256	FlG1A105A047	C 1UF, K, 10V	1	
	C8257	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8258	FlG1C104A116	C 0.10UF, K, 16V	1	
	C8259	FlG1A105A047	C 1UF, K, 10V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C8260	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8261	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8262	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8263	F1G1A105A047	C 1UF, K, 10V	1	
	C8264	F1G1A105A047	C 1UF, K, 10V	1	
	C8265	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8266	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8267	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8268	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8269	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8270	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8271	ECGRLOG680ER	C 68UF, J, 4V	1	
	C8272	F1J1A106A087	C 0.010UF, K, 10V	1	
	C8273	F1G1A105A047	C 1UF, K, 10V	1	
	C8274	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8275	F1G1A105A047	C 1UF, K, 10V	1	
	C8276	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8277	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8278	F1G1A105A047	C 1UF, K, 10V	1	
	C8279	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8280	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8281	F1G1A105A047	C 1UF, K, 10V	1	
	C8282	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8283	F1G1A105A047	C 1UF, K, 10V	1	
	C8284	F1G1A105A047	C 1UF, K, 10V	1	
	C8285	F1G1A105A047	C 1UF, K, 10V	1	
	C8286	F1G1A105A047	C 1UF, K, 10V	1	
	C8289	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8290	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8291	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8292	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8293	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8300	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8301	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8303	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8304	F1G1H100A731	C 10PF, K, 50V	1	
	C8305	F1G1H100A731	C 10PF, K, 50V	1	
	C8306	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8308	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8309	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8310	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8311	F1J1A106A087	C 0.010UF, K, 10V	1	
	C8314	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8315	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8316	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8317	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8318	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8319	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8320	ECJ1VB1A105K	C 1UF, K, 10V	1	
	C8321	F1H1A225A051	C 22UF, 50V	1	
	C8322	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8324	F1G1H560A731	C 56UF, 50V	1	
	C8325	F1G1H560A731	C 56UF, 50V	1	
	C8340	F1K1E106A136	C 10UF, Z, 25V	1	
	C8341	F1J1A106A087	C 0.010UF, K, 10V	1	
	C8342	F1J1A106A087	C 0.010UF, K, 10V	1	
	C8360	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8361	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8362	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8365	F1G1H151A731	C 150PF, K, 50V	1	
	C8366	F1G1H151A731	C 150PF, K, 50V	1	
	C8367	F1G1H151A731	C 150PF, K, 50V	1	
	C8368	F1G1H151A731	C 150PF, K, 50V	1	
	C8369	F1G1H151A731	C 150PF, K, 50V	1	
	C8370	F1G1H151A731	C 150PF, K, 50V	1	
	C8371	F1G1H151A731	C 150PF, K, 50V	1	
	C8372	F1G1H151A731	C 150PF, K, 50V	1	
	C8373	F1G1H151A731	C 150PF, K, 50V	1	
	C8374	F1G1H151A731	C 150PF, K, 50V	1	
	C8375	F1G1H151A731	C 150PF, K, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C8400	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8401	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8402	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8403	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8404	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8405	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8406	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8407	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8408	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8409	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8410	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8412	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8413	F1G1E103A123	C 0.010UF, K, 25V	1	
	C8414	F1G1E103A123	C 0.010UF, K, 25V	1	
	C8415	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8416	F1K0J226A008	C 22UF, K, 6.3V	1	
	C8417	F1K0J226A008	C 22UF, K, 6.3V	1	
	C8418	F1K0J226A008	C 22UF, K, 6.3V	1	
	C8512	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8513	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8515	F1J1A106A087	C 0.010UF, K, 10V	1	
	C8516	F1G1C103A116	C 0.010UF, K, 16V	1	
	C8600	F1G1H102A730	C 1000UF, 50V	1	
	C8711	F1J1A106A087	C 0.010UF, K, 10V	1	
	C8712	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8713	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8714	F1G1H101A731	C 100PF, K, 50V	1	
	C8717	F1J1A106A087	C 0.010UF, K, 10V	1	
	C8718	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8719	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8720	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8721	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8722	F1J1A106A087	C 0.010UF, K, 10V	1	
	C8739	F1J1A106A087	C 0.010UF, K, 10V	1	
	C8740	F1J1A106A087	C 0.010UF, K, 10V	1	
	C8741	F1G1A105A047	C 1UF, K, 10V	1	
	C8742	F1G1A105A047	C 1UF, K, 10V	1	
	C8853	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8854	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8860	F2G1C470A022	E 47UF, 16V	1	
	C8861	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8862	F1G1C103A116	C 0.010UF, K, 16V	1	
	C8863	F1J0G226A001	C 0.001UF, 6.3V	1	
	C8922	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8923	F1G1C104A116	C 0.10UF, K, 16V	1	
	C8950	F1G1C103A116	C 0.010UF, K, 16V	1	
	C9040	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9052	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9066	F1K0J226A008	C 22UF, K, 6.3V	1	
	C9067	F1G1H102A730	C 1000UF, 50V	1	
	C9069	F1G1H102A730	C 1000UF, 50V	1	
	C9097	F1K1E106A136	C 10UF, Z, 25V	1	
	C9098	F1K1E106A136	C 10UF, Z, 25V	1	
	C9099	F1G1C104A116	C 0.10UF, K, 16V	1	
	C9100	F1J1A106A087	C 0.010UF, K, 10V	1	
	C9101	F1G1E103A123	C 0.010UF, K, 25V	1	
	C9102	F1K1E106A136	C 10UF, Z, 25V	1	
	C9103	F1G1E103A123	C 0.010UF, K, 25V	1	
	C9104	F1G1E103A123	C 0.010UF, K, 25V	1	
	C9107	F1G1H272A730	C 2700UF, 50V	1	
	C9111	F1K0J226A008	C 22UF, K, 6.3V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9112	FIK0J226A008	C 22UF, K, 6.3V	1	
	C9300	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9301	FI1G1H180A731	C 18UF, 50V	1	
	C9302	FI1G1H150A731	C 15UF, 50V	1	
	C9307	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9308	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9311	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9312	FI1J1A106A087	C 0.010UF, K, 10V	1	
	C9313	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9314	FI1J1A106A087	C 0.010UF, K, 10V	1	
	C9315	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9316	FI1J1A106A087	C 0.010UF, K, 10V	1	
	C9319	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9322	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9323	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9325	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9327	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9335	FI1J1A106A087	C 0.010UF, K, 10V	1	
	C9336	FI1J1A106A087	C 0.010UF, K, 10V	1	
	C9337	FI1J1A106A087	C 0.010UF, K, 10V	1	
	C9339	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9340	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9342	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9344	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9347	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
	C9349	FI1J1A106A087	C 0.010UF, K, 10V	1	
	C9350	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9351	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9352	ECJ1VB0J105K	C 1UF, K, 6.3V	1	
	C9356	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9361	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9363	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9371	FI1J1A106A087	C 0.010UF, K, 10V	1	
	C9372	FI1J1A106A087	C 0.010UF, K, 10V	1	
	C9373	FI1J1A106A087	C 0.010UF, K, 10V	1	
	C9374	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9375	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9380	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9383	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9391	FI1J1A106A087	C 0.010UF, K, 10V	1	
	C9392	FI1J1A106A087	C 0.010UF, K, 10V	1	
	C9400	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9401	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9402	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9800	FI1H1E104A129	C 0.1UF, 25V	1	
	C9801	FI1G1E682A123	C 6800UF, Z, 25V	1	
	C9803	FI1G1E472A123	C 4200UF, Z, 25V	1	
	C9804	FI1K1E106A136	C 10UF, Z, 25V	1	
	C9805	FI1K1E106A136	C 10UF, Z, 25V	1	
	C9806	FI1G1H101A731	C 100PF, K, 50V	1	
	C9807	FI1G1H201A731	C 200 UF, K, 50V	1	
	C9809	FI1G1H102A730	C 1000UF, 50V	1	
	C9811	FI1G1C104A116	C 0.10UF, K, 16V	1	
	C9812	FI1K1E106A136	C 10UF, Z, 25V	1	
	C9813	FI1K1E106A136	C 10UF, Z, 25V	1	
	C9814	FI1K0J226A008	C 22UF, K, 6.3V	1	
	C9815	FI1K0J226A008	C 22UF, K, 6.3V	1	
	C9816	FI1G1E103A123	C 0.010UF, K, 25V	1	
	C9817	FI1J1A106A087	C 0.010UF, K, 10V	1	
	C9819	FI1J1A106A087	C 0.010UF, K, 10V	1	
	C9825	FI1K0J226A008	C 22UF, K, 6.3V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C9900	FI1G1E103A123	C 0.010UF, K, 25V	1	
	CN0102	K1KA11A00178	11P CONNECTOR	1	
	D1002	EZJZ0V120JA	VARISTOR	1	
	D1003	EZJZ0V120JA	VARISTOR	1	
	D1004	EZAEG2A50AX	ESD SUPPRESSOR	1	
	D1005	EZAEG2A50AX	ESD SUPPRESSOR	1	
	D1006	EZAEG2A50AX	ESD SUPPRESSOR	1	
	D1007	EZAEG2A50AX	ESD SUPPRESSOR	1	
	D1008	EZAEG2A50AX	ESD SUPPRESSOR	1	
	D1009	EZAEG2A50AX	ESD SUPPRESSOR	1	
	D1010	EZAEG2A50AX	ESD SUPPRESSOR	1	
	D1107	B0JCCE000008	DIODE	1	
	D2014	B0ACCCJ000048	DIODE	1	
	D2520	B3AGB0000060	LED	1	PAVCCZ
	D3013	DZ2J140M0L	ZENER DIODE	1	PAVCCZ
	D3014	DZ2J140M0L	ZENER DIODE	1	PAVCCZ
	D3015	K7AAAY000006	PHOTO LINK	1	
	D3048	B0JCCE000008	DIODE	1	
	D3339	B0JCCE000008	DIODE	1	
	D4702	B0ACCCJ000048	DIODE	1	
	D4703	DZ2J056M0L	ZENER DIODE	1	
	D4704	B0JCCE000008	DIODE	1	
	D4719	B0ACCCJ000048	DIODE	1	
	D4720	DZ2J056M0L	ZENER DIODE	1	
	D4721	B0JCCE000008	DIODE	1	
	D4735	B0ACCCJ000048	DIODE	1	
	D4736	DZ2J056M0L	ZENER DIODE	1	
	D4737	B0JCCE000008	DIODE	1	
	D4771	DZ2J056M0L	ZENER DIODE	1	
	D4772	B0JCCE000008	DIODE	1	
	D4785	B0ECKM000048	DIODE	1	
	D5250	B0ACCCJ000048	DIODE	1	
	D5431	B0ADEJ000035	ZENER DIODE	1	
	D5432	B0ADEJ000035	ZENER DIODE	1	
	D5433	B0ADCJ000100	DIODE	1	
	D5434	B0ADCJ000100	DIODE	1	
	D5435	B0ADCJ000100	DIODE	1	
	D5437	B0ADCJ000100	DIODE	1	
	D5440	DZ2J120M0L	ZENER DIODE	1	
	D5441	DZ2J120M0L	ZENER DIODE	1	
	D5442	DZ2J068M0L	ZENER DIODE	1	PAVCCZ
	D5443	DZ2J068M0L	ZENER DIODE	1	PAVCCZ
	D5444	DZ2J068M0L	ZENER DIODE	1	PAVCCZ
	D5445	DZ2J068M0L	ZENER DIODE	1	PAVCCZ
	D5449	DZ2J068M0L	ZENER DIODE	1	PAVCCZ
	D5450	B0ADCJ000100	DIODE	1	
	D5454	B0ADEJ000035	ZENER DIODE	1	
	D5470	B0ADEJ000035	ZENER DIODE	1	
	D5481	B0JCME000076	DIODE	1	
	D5482	B0ACCCJ000048	DIODE	1	
	D5505	B0JCPD000026	DIODE	1	
	D5602	DZ2J056M0L	ZENER DIODE	1	
	D5603	B0JCPG000030	DIODE	1	
	D5605	B0ECKM000048	DIODE	1	
	D6851	B0JCPD000021	DIODE	1	
	D6852	B0BC4R700007	ZENER DIODE	1	
	D6853	B0BC4R700007	ZENER DIODE	1	
	D6854	B0BC4R700007	ZENER DIODE	1	
	D9104	B0JCPG000030	DIODE	1	
	D9806	B0ADCJ000100	DIODE	1	
	D9807	B0ADCJ000100	DIODE	1	
	D9816	B0JCPG000030	DIODE	1	
	FL2759	FI1J1E104A148	C 0.10UF, Z, 25V	1	
	IC1000	C1ZBZ0003775	IC	1	
	IC1100	MNZSFH9GP91	IC	1	
	IC1101	TVRR700	IC	1	PAVCCZ
	IC2301	C1AB00003230	IC	1	
	IC2950	C0CBCAG00031	IC	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	IC2952	C0DBGY00281	IC	1	
	IC3001	C1AB00003218	IC	1	
	IC4500	C1AB00003079	IC	1	
	IC4701	C0DBGY00578	IC	1	
	IC5250	C0DBEY00123	IC	1	PAVCCZ
	IC5251	C0CBCBC00227	IC	1	
	IC5290	C0DBGY00884	IC	1	
	IC5302	C0DBAY00755	IC	1	PAVCCZ
	IC5470	C0EBM0000026	IC	1	
	IC5481	C1ZBZ0004161	IC	1	
	IC5500	C0DBAY00715	IC	1	
	IC5501	C0DBAY00715	IC	1	
	IC5603	C0DBFY00049	IC	1	
	IC5604	C0DBGY00578	IC	1	
	IC6851	C1AB00003273	IC	1	PAVCCZ
	IC6855	C0DBAY00462	IC	1	
	IC6856	C0DBAHF00015	IC	1	
	IC6857	C0DBFY00041	IC	1	PAVCCZ
	IC8000	MN2WS0110F	IC	1	PAVCCZ
	IC8100	C1ZBZ0003967	IC	1	
	IC8240	C3ABTY000025	IC	1	
	IC8241	C3ABTY000025	IC	1	
	IC8300	C1AB00003188	IC	1	PAVCCZ
	IC8302	C0DBFY00041	IC	1	PAVCCZ
	IC8360	C0JBAR000566	IC	1	PAVCCZ
	IC8361	C0JBAR000566	IC	1	PAVCCZ
	IC8362	C0JBAR000566	IC	1	PAVCCZ
	IC8400	C1AB00003193	IC	1	PAVCCZ
	IC8401	C1AB00002913	IC	1	PAVCCZ
	IC8402	C0ZBZ0001584	IC	1	PAVCCZ
	IC8703	C1CB00003239	IC	1	
	IC8921	TVRR329	IC	1	PAVCCZ
	IC8950	TVRR371	IC	1	PAVCCZ
	IC9300	C1AB00003258	IC	1	
	IC9304	TVRR401	IC	1	PAVCCZ
	IC9400	C0JBAZ002692	IC	1	
	IC9401	C0JBAZ002692	IC	1	
	IC9402	C0JBAZ002692	IC	1	
	IC9800	C0DBAY00605	IC	1	
	IC9801	C0DBAY00462	IC	1	
	IC9802	C0CBCAG00046	IC	1	
	IC9803	C0DBAY00462	IC	1	
	JK3002	K1FY242A0001	CONNECTOR	1	PAVCCZ
	JK3100A	K2HA710A0001	JACK	1	PAVCCZ
	JK3707	K4AK13B00006	TERMINAL BOARD	1	PAVCCZ
	JK4700	K1FY119D0011	CONNECTOR	1	PAVCCZ
	JK4701	K1FY119D0011	CONNECTOR	1	PAVCCZ
	JK4703	K1FY119E0015	CONNECTOR	1	PAVCCZ
	JK8301	K2LC1YYA0005	JACK	1	
	JK8401A	K1NA68B00054	68P CONNECTOR	1	PAVCCZ
	JK8850	K1NA12E00017	12P CONNECTOR	1	PAVCCZ
	JS6703	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	K1	K1KA08B00270	8P CONNECTOR	1	
	L1100	J0JYC0000068	CHIP INDUCTOR	1	
	L2106	J0ZZB0000097	FILTER	1	
	L2107	J0ZZB0000097	FILTER	1	
	L2301	J0JHC0000045	CHIP INDUCTOR	1	
	L2302	G1C3R0ZA0156	INDUCTION COIL	1	
	L2303	G1C220MA0416	INDUCTION COIL	1	
	L2304	G1C220MA0416	INDUCTION COIL	1	
	L2305	G1C220MA0416	INDUCTION COIL	1	
	L2306	G1C220MA0416	INDUCTION COIL	1	
	L2900	J0JCC0000278	CHIP INDUCTOR	1	
	L2901	J0JCC0000278	CHIP INDUCTOR	1	
	L2904	J0JCC0000278	CHIP INDUCTOR	1	
	L2905	J0JHC0000046	CHIP INDUCTOR	1	
	L2950	J0JHC0000045	CHIP INDUCTOR	1	
	L3002	J0JYC0000331	CHIP INDUCTOR	1	PAVCCZ
	L3003	J0JYC0000331	CHIP INDUCTOR	1	PAVCCZ

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	L3004	J0JYC0000331	CHIP INDUCTOR	1	PAVCCZ
	L3005	J0JYC0000331	CHIP INDUCTOR	1	PAVCCZ
	L3006	J0JYC0000331	CHIP INDUCTOR	1	PAVCCZ
	L3007	J0JYC0000331	CHIP INDUCTOR	1	PAVCCZ
	L3008	J0JYC0000331	CHIP INDUCTOR	1	PAVCCZ
	L3009	J0JYC0000331	CHIP INDUCTOR	1	PAVCCZ
	L3010	J0JYC0000331	CHIP INDUCTOR	1	PAVCCZ
	L3011	J0JYC0000331	CHIP INDUCTOR	1	PAVCCZ
	L3014	J0JYC0000331	CHIP INDUCTOR	1	PAVCCZ
	L3015	J0JYC0000331	CHIP INDUCTOR	1	PAVCCZ
	L3017	J0JCC0000287	CHIP INDUCTOR	1	
	L3018	J0JCC0000287	CHIP INDUCTOR	1	
	L3020	J0JYC0000331	CHIP INDUCTOR	1	PAVCCZ
	L3028	J0JCC0000287	CHIP INDUCTOR	1	
	L3029	J0JYC0000331	CHIP INDUCTOR	1	PAVCCZ
	L3030	J0JYC0000331	CHIP INDUCTOR	1	PAVCCZ
	L4700	J0JYC0000068	CHIP INDUCTOR	1	
	L4701	J0JYC0000068	CHIP INDUCTOR	1	
	L4702	J0JYC0000068	CHIP INDUCTOR	1	
	L4703	J0JYC0000068	CHIP INDUCTOR	1	
	L4704	J0JYC0000068	CHIP INDUCTOR	1	
	L4705	J0JYC0000068	CHIP INDUCTOR	1	
	L4706	J0JYC0000068	CHIP INDUCTOR	1	
	L4707	J0JYC0000068	CHIP INDUCTOR	1	
	L4708	J0JYC0000068	CHIP INDUCTOR	1	
	L4712	J0JHC0000045	CHIP INDUCTOR	1	
	L5251	J0JCC0000278	CHIP INDUCTOR	1	
	L5480	J0JYC0000068	CHIP INDUCTOR	1	
	L5500	G1C2R2M00022	INDUCTION COIL	1	
	L5501	G1C3R3Z00005	INDUCTION COIL	1	
	L5502	G1C2R2Z00007	INDUCTION COIL	1	
	L5503	G1C3R3Z00004	INDUCTION COIL	1	
	L5504	G1C100MA0077	INDUCTION COIL	1	
	L5505	G1C100MA0077	INDUCTION COIL	1	
	L5611	G1C6R8MA0416	INDUCTION COIL	1	PAVCCZ
	L6855	G1C100MA0291	INDUCTION COIL	1	
	L6856	G1C100M00041	INDUCTION COIL	1	
	L6936	J0JHC0000045	CHIP INDUCTOR	1	
	L6937	J0JHC0000045	CHIP INDUCTOR	1	
	L6938	J0JHC0000045	CHIP INDUCTOR	1	
	L6940	J0JHC0000045	CHIP INDUCTOR	1	
	L6941	G1CR15JA0020	INDUCTION COIL	1	
	L8000	J0JCC0000287	CHIP INDUCTOR	1	
	L8001	J0JCC0000287	CHIP INDUCTOR	1	
	L8002	J0JCC0000287	CHIP INDUCTOR	1	
	L8003	J0JHC0000045	CHIP INDUCTOR	1	
	L8004	J0JHC0000021	CHIP INDUCTOR	1	
	L8005	J0JHC0000021	CHIP INDUCTOR	1	
	L8006	J0JCC0000287	CHIP INDUCTOR	1	
	L8007	J0JHC0000045	CHIP INDUCTOR	1	
	L8008	J0JCC0000287	CHIP INDUCTOR	1	
	L8009	J0JHC0000045	CHIP INDUCTOR	1	
	L8010	J0JCC0000287	CHIP INDUCTOR	1	
	L8011	J0JHC0000116	CHIP INDUCTOR	1	
	L8012	J0JCC0000287	CHIP INDUCTOR	1	
	L8013	J0JCC0000287	CHIP INDUCTOR	1	
	L8014	J0JCC0000287	CHIP INDUCTOR	1	
	L8015	J0JHC0000116	CHIP INDUCTOR	1	
	L8016	J0JHC0000116	CHIP INDUCTOR	1	
	L8017	J0JHC0000045	CHIP INDUCTOR	1	
	L8018	J0JHC0000045	CHIP INDUCTOR	1	
	L8019	J0JHC0000045	CHIP INDUCTOR	1	
	L8020	J0JCC0000287	CHIP INDUCTOR	1	
	L8021	J0JCC0000287	CHIP INDUCTOR	1	
	L8022	J0JHC0000045	CHIP INDUCTOR	1	
	L8023	J0JHC0000045	CHIP INDUCTOR	1	
	L8024	J0JCC0000287	CHIP INDUCTOR	1	
	L8100	J0JHC0000045	CHIP INDUCTOR	1	
	L8300	J0JHC0000045	CHIP INDUCTOR	1	
	L8302	J0JHC0000045	CHIP INDUCTOR	1	
	L8303	J0JHC0000045	CHIP INDUCTOR	1	
	L8304	J0JHC0000045	CHIP INDUCTOR	1	
	L8340	J0JDC0000002	CHIP INDUCTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	L8341	K5H1622A0031	FUSE	1	
	L8342	J0JHC0000045	CHIP INDUCTOR	1	
	L8400	J0JHC0000045	CHIP INDUCTOR	1	
	L8401	J0JHC0000045	CHIP INDUCTOR	1	
	L8511	J0ZZB0000083	FILTER	1	PAVCCZ
	L8512	J0ZZB0000083	FILTER	1	PAVCCZ
	L8513	J0ZZB0000083	FILTER	1	PAVCCZ
	L8701	J0JHC0000045	CHIP INDUCTOR	1	
	L8702	J0JHC0000045	CHIP INDUCTOR	1	
	L8705	J0JHC0000045	CHIP INDUCTOR	1	
	L8706	J0JHC0000045	CHIP INDUCTOR	1	
	L8850	J0JHC0000045	CHIP INDUCTOR	1	
	L8920	J0JDC0000002	CHIP INDUCTOR	1	
	L9000	G1C100MA0416	INDUCTION COIL	1	
	L9300	J0JHC0000117	CHIP INDUCTOR	1	
	L9301	J0JHC0000117	CHIP INDUCTOR	1	
	L9302	J0JHC0000117	CHIP INDUCTOR	1	
	L9800	G1C6R8Z00010	INDUCTION COIL	1	
	L9801	G1C100MA0416	INDUCTION COIL	1	
	PA5610	K5H4022A0031	FUSE	1	
	PA6851	K5H1022A0031	FUSE	1	
	Q2101	DSA200100L	TRANSISTOR	1	
	Q2109	DSA200100L	TRANSISTOR	1	
	Q2252	DSA200100L	TRANSISTOR	1	
	Q2253	B1Aafb000002	TRANSISTOR	1	PAVCCZ
	Q2254	B1Aafb000002	TRANSISTOR	1	PAVCCZ
	Q2255	DSC2001S0L	TRANSISTOR	1	
	Q2301	DSA200100L	TRANSISTOR	1	
	Q2510	DSC200100L	TRANSISTOR	1	
	Q2511	DSC200100L	TRANSISTOR	1	
	Q2512	DSC200100L	TRANSISTOR	1	
	Q3000	B1ABCF000231	TRANSISTOR	1	
	Q3001	B1ABCF000231	TRANSISTOR	1	
	Q3002	B1ABCF000231	TRANSISTOR	1	
	Q3003	B1ABCF000231	TRANSISTOR	1	
	Q3004	B1ABCF000231	TRANSISTOR	1	
	Q3005	B1ABCF000231	TRANSISTOR	1	
	Q3008	DSA200100L	TRANSISTOR	1	
	Q4512	B1HFCFA00026	TRANSISTOR	1	
	Q4513	DSA200100L	TRANSISTOR	1	
	Q4700	B1ABCF000231	TRANSISTOR	1	
	Q4701	B1ABCF000231	TRANSISTOR	1	
	Q4702	B1ABCF000231	TRANSISTOR	1	
	Q4703	B1ABCF000231	TRANSISTOR	1	
	Q4704	B1ABCF000231	TRANSISTOR	1	
	Q4705	B1ABCF000231	TRANSISTOR	1	
	Q5431	DSA200100L	TRANSISTOR	1	
	Q5432	DSC2001S0L	TRANSISTOR	1	
	Q5433	DSC2001S0L	TRANSISTOR	1	
	Q5434	DSC2001S0L	TRANSISTOR	1	
	Q5435	DSA200100L	TRANSISTOR	1	
	Q5436	DSC200100L	TRANSISTOR	1	
	Q5475	DSC2001S0L	TRANSISTOR	1	
	Q5476	B1ABCF000231	TRANSISTOR	1	
	Q5478	DSC200100L	TRANSISTOR	1	
	Q5500	B1MBDDA00003	FET	1	
	Q5501	B1CFRD000048	FET	1	
	Q5502	B1MBDDA00003	FET	1	
	Q5503	B1MBEDA00015	FET	1	
	Q5504	B1CFRD000048	FET	1	
	Q5602	DSC2001S0L	TRANSISTOR	1	
	Q5603	DSC2001S0L	TRANSISTOR	1	
	Q8400	DSC200100L	TRANSISTOR	1	
	Q8401	DSC200100L	TRANSISTOR	1	
	Q9005	DSC200100L	TRANSISTOR	1	
	Q9006	DSC200100L	TRANSISTOR	1	
	Q9900	DSC200100L	TRANSISTOR	1	
	Q9901	DSC200100L	TRANSISTOR	1	
	R0180	D0GA101JA015	M 100 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R0903	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R0904	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R0907	EXB28V103JX	RESISTOR ARRAY	1	
	R0908	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R0909	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R0910	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R0911	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R0912	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R0913	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0914	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0915	D0GA472JA015	M 4.7KOHM, J, 0.063W	1	
	R0916	D0GA472JA015	M 4.7KOHM, J, 0.063W	1	
	R0917	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0918	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0929	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R0930	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R0931	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0932	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0935	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0936	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R0945	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R0946	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R0947	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R0948	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R0949	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R0950	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R0951	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R0952	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R0953	D0GA101JA015	M 100 OHM, J, 0.063W	1	
	R0954	D0GA101JA015	M 100 OHM, J, 0.063W	1	
	R0955	D0GA222JA015	M 2.2KOHM, J, 0.063W	1	
	R0956	D0GA222JA015	M 2.2KOHM, J, 0.063W	1	
	R0957	D0GA472JA015	M 4.7KOHM, J, 0.063W	1	
	R0958	D0GA472JA015	M 4.7KOHM, J, 0.063W	1	
	R0959	D0GA222JA015	M 2.2KOHM, J, 0.063W	1	
	R0960	D0GA222JA015	M 2.2KOHM, J, 0.063W	1	
	R1004	D0GBR00Z0002	M 0 OHM J 1/10W	1	
	R1010	D0GB103JA057	M 10K OHM J 1/10W	1	
	R1153	D0GA471JA015	M 470OHM, J, 0.063W	1	
	R1163	D0GA105JA015	M 1M OHM, J, 0.063W	1	
	R1179	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R1181	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R1182	D0GA273JA015	M 27K OHM J, 0.063W	1	
	R1197	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R1203	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R1209	D0GA472JA015	M 4.7KOHM, J, 0.063W	1	
	R1221	D1BB7151A055	M7.15KOHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R1224	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R1225	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R1236	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R1237	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R1243	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R1255	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R1406	D0GA683JA015	M 68KOHM, J, 0.063W	1	
	R1407	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R1410	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R1411	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R2053	D1BB1403A055	M 140KOHM, 1/10W	1	
	R2055	D1BB1403A055	M 140KOHM, 1/10W	1	
	R2069	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2070	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2101	D0GA332JA015	M 3.3KOHM, J, 0.063W	1	
	R2102	D0GA472JA015	M 4.7KOHM, J, 0.063W	1	
	R2103	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R2104	D0GA122JA015	M 1.2KOHM, J, 0.063W	1	
	R2107	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R2110	ERJ2GEJ220	M 22 OHM, J, 0.063W	1	
	R2121	D0GA681JA015	M680 OHM, J, 0.063W	1	
	R2135	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R2139	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R2254	D0GA101JA015	M 100 OHM, J, 0.063W	1	
	R2255	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R2256	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2257	D0GA105JA015	M 1M OHM, J, 0.063W	1	
	R2258	D0GA101JA015	M 100 OHM, J, 0.063W	1	
	R2259	D0GA101JA015	M 100 OHM, J, 0.063W	1	
	R2260	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2263	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2264	D0GA101JA015	M 100 OHM, J, 0.063W	1	
	R2301	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2302	EXB28V220J	RESISTOR ARRAY	1	
	R2306	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R2307	D0GA472JA015	M 4.7KOHM, J, 0.063W	1	
	R2308	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R2309	D0GA222JA015	M 2.2KOHM, J, 0.063W	1	
	R2310	D0GA222JA015	M 2.2KOHM, J, 0.063W	1	
	R2318	ERJ8GEYJ3R3V	M 3.3 OHM, J, 1/8W	1	
	R2319	ERJ8GEYJ3R3V	M 3.3 OHM, J, 1/8W	1	
	R2320	ERJ8GEYJ3R3V	M 3.3 OHM, J, 1/8W	1	
	R2321	ERJ8GEYJ3R3V	M 3.3 OHM, J, 1/8W	1	
	R2510	ERJ3GEYJ470	M 47 OHM, J, 1/16W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R2511	D0GB104JA041	M 100KOHM J 1/10W	1	
	R2512	D0GB224JA041	M 2.2KOHM, J, 1/10W	1	
	R2513	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
	R2514	D0GB103JA057	M 10K OHM J 1/10W	1	
	R2515	D0GB473JA057	M 47KOHM, J, 1/10W	1	
	R2516	D1BB6800A055	M 680 OHM, 1/10W	1	
	R2517	ERJ3GEYJ223	M 22KOHM, J, 1/16W	1	
	R2518	D0GB473JA057	M 47KOHM, J, 1/10W	1	
	R2519	D1BB1821A055	M1.82KOHM, 1/10W	1	
	R2550	ERJ6ENF1432	M14.3KOHM, 1/10W	1	
	R2551	ERJ6ENF6651	M6.65KOHM, 1/10W	1	
	R2552	ERJ6ENF7151	M7.15KOHM, 1/10W	1	
	R2553	ERJ6ENF1741	M1.74KOHM, 1/10W	1	
	R2751	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R2752	D0GA184JA015	M 180KOHM J 0.063W	1	
	R2753	D0GB102JA041	M 1KOHM, J, 1/10W	1	
	R2807	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R2816	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R2819	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R2824	D0GA101JA015	M 100 OHM, J, 0.063W	1	
	R2826	D0GA101JA015	M 100 OHM, J, 0.063W	1	
	R2828	D0GA101JA015	M 100 OHM, J, 0.063W	1	
	R2830	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R2831	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R2834	D0GA101JA015	M 100 OHM, J, 0.063W	1	
	R2835	D0GA101JA015	M 100 OHM, J, 0.063W	1	
	R2907	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R2914	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2918	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R2926	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R2930	D0GA153JA015	M 15K OHM J 0.063W	1	
	R2959	D0GBR00Z0002	M 0 OHM J 1/10W	1	
	R2960	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R2961	D0GBR00Z0002	M 0 OHM J 1/10W	1	
	R3000	D0GA223JA015	M 22K OHM J 0.063W	1	
	R3001	D0GA223JA015	M 22K OHM J 0.063W	1	
	R3002	D0GA223JA015	M 22K OHM J 0.063W	1	
	R3003	D0GA223JA015	M 22K OHM J 0.063W	1	
	R3004	D0GA223JA015	M 22K OHM J 0.063W	1	
	R3005	D0GA223JA015	M 22K OHM J 0.063W	1	
	R3006	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R3007	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R3008	D0GA222JA015	M 2.2KOHM, J, 0.063W	1	
	R3009	D0GA222JA015	M 2.2KOHM, J, 0.063W	1	
	R3010	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R3011	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R3012	D0GA222JA015	M 2.2KOHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3013	D0GA222JA015	M 2.2KOHM, J,0.063W	1	
	R3017	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R3019	D0GA222JA015	M 2.2KOHM, J,0.063W	1	
	R3021	D0GA222JA015	M 2.2KOHM, J,0.063W	1	
	R3024	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3025	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3028	D0GA331JA015	M 330 OHM, J,0.063W	1	
	R3029	D0GA331JA015	M 330 OHM, J,0.063W	1	
	R3030	D0GA101JA015	M 100 OHM, J,0.063W	1	
	R3033	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R3034	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R3037	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R3038	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R3041	D0GA331JA015	M 330 OHM, J,0.063W	1	
	R3042	D0GA331JA015	M 330 OHM, J,0.063W	1	
	R3072	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3073	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3074	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3075	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3076	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3077	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3079	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3081	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3082	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3083	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3084	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3085	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3086	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3087	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3089	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R3091	D1BA2152A014	M21.5KOHM, 1/10W	1	PAVCCZ
	R3092	D1BA2152A014	M21.5KOHM, 1/10W	1	PAVCCZ
	R3093	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R3094	D1BA1302A014	M 13KOHM, 1/10W	1	PAVCCZ
	R3097	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3098	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3100	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3102	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3104	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3106	D0GA273JA015	M 27K OHM J, 0.063W	1	
	R3108	D0GA273JA015	M 27K OHM J, 0.063W	1	
	R3112	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R3113	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R3115	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3116	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3117	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3118	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3120	D0GA331JA015	M 330 OHM, J,0.063W	1	
	R3121	EXB28V221J	RESISTOR ARRAY	1	
	R3128	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3143	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R3146	D0GA331JA015	M 330 OHM, J,0.063W	1	
	R3150	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R3153	D0GA680JA015	M 47 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R3154	EXB28V221J	RESISTOR ARRAY	1	
	R3157	EXB28V221J	RESISTOR ARRAY	1	
	R3167	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3169	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3172	ERJ6RED750	M 75 OHM, 1/10W	1	
	R3173	EXB28V221J	RESISTOR ARRAY	1	
	R3174	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R3182	D1BA1302A014	M 13KOHM, 1/10W	1	PAVCCZ
	R3187	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3188	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3192	EXB28V820JX	RESISTOR ARRAY	1	
	R3193	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3198	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3204	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3205	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3206	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R3207	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R3213	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R3236	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R3237	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R3240	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3245	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R3287	D0GA473JA015	M 47 OHM, J,0.063W	1	
	R3288	D0GA473JA015	M 47 OHM, J,0.063W	1	
	R3290	D0GA473JA015	M 47 OHM, J,0.063W	1	
	R3291	D0GA473JA015	M 47 OHM, J,0.063W	1	
	R3292	D0GA105JA015	M 1M OHM, J,0.063W	1	
	R3293	EZAEG2A50AX	ESD SUPPRESSOR	1	
	R3716	D0GA223JA015	M 22K OHM J 0.063W	1	
	R3717	D0GA223JA015	M 22K OHM J 0.063W	1	
	R4548	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4549	D0GA151JA015	M 150 OHM, J,0.063W	1	
	R4550	D0GA151JA015	M 150 OHM, J,0.063W	1	
	R4551	D0GA151JA015	M 150 OHM, J,0.063W	1	
	R4552	D0GA560JA015	M 56 OHM, J,0.063W	1	
	R4553	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4554	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4557	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R4563	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4597	D0GA152JA015	M 1.5KOHM, J,0.063W	1	
	R4598	D0GA152JA015	M 1.5KOHM, J,0.063W	1	
	R4599	ERJ2GEJ473	M 47KOHM, J,0.063W	1	
	R4651	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4655	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4659	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4663	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4666	D0GA330JA015	M 33 OHM, J,0.063W	1	
	R4668	D0GA330JA015	M 33 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R4670	D0GA330JA015	M 33 OHM, J,0.063W	1	
	R4672	D0GA330JA015	M 33 OHM, J,0.063W	1	
	R4674	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R4675	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R4676	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4677	D0GA122JA015	M 1.2KOHM, J,0.063W	1	
	R4702	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4703	D0GA330JA015	M 33 OHM, J,0.063W	1	
	R4704	D0GA473JA015	M 47 OHM, J,0.063W	1	
	R4706	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4707	D0GA473JA015	M 47 OHM, J,0.063W	1	
	R4708	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4709	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4710	D0GA473JA015	M 47 OHM, J,0.063W	1	
	R4711	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4712	D0GA473JA015	M 47 OHM, J,0.063W	1	
	R4715	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4716	D0GA330JA015	M 33 OHM, J,0.063W	1	
	R4717	D0GA473JA015	M 47 OHM, J,0.063W	1	
	R4719	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4720	D0GA473JA015	M 47 OHM, J,0.063W	1	
	R4721	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4722	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4723	D0GA473JA015	M 47 OHM, J,0.063W	1	
	R4724	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4725	D0GA473JA015	M 47 OHM, J,0.063W	1	
	R4728	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4729	D0GA330JA015	M 33 OHM, J,0.063W	1	
	R4730	D0GA473JA015	M 47 OHM, J,0.063W	1	
	R4732	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4733	D0GA473JA015	M 47 OHM, J,0.063W	1	
	R4734	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4735	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R4736	D0GA473JA015	M 47 OHM, J,0.063W	1	
	R4737	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R4738	D0GA473JA015	M 47 OHM, J,0.063W	1	
	R4739	ERJ2GEJ220	M 22 OHM, J,0.063W	1	
	R4740	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R4741	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R4742	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R4743	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R4744	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R4745	D0GA680JA015	M 47 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R4748	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R4749	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R4750	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R4751	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R4752	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R4754	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R4756	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R4758	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R4762	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R4763	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R4764	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R4765	D1BB4701A055	M 4.7KOHM, 1/10W	1	
	R4767	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R4770	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R4771	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R4775	D1BA1001A014	M 1KOHM, 1/10W	1	
	R4776	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R4777	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R4778	D1BA1001A014	M 1KOHM, 1/10W	1	
	R4781	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R4783	D0GA473JA015	M 47 OHM, J,0.063W	1	
	R4785	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R4793	D0GA473JA015	M 47 OHM, J,0.063W	1	
	R4796	D0GA473JA015	M 47 OHM, J,0.063W	1	
	R4798	D0GA473JA015	M 47 OHM, J,0.063W	1	
	R4799	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R4824	D0GA473JA015	M 47 OHM, J,0.063W	1	
	R5155	D0GA101JA015	M 100 OHM, J,0.063W	1	
	R5253	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5254	D1BA5361A014	M5.36KOHM, 1/16W	1	PAVCCZ
	R5255	D1BA1001A014	M 1KOHM, 1/10W	1	
	R5412	D0GA273JA015	M 27K OHM J ,0.063W	1	
	R5413	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R5418	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R5419	D0GA683JA015	M 68KOHM, J,0.063W	1	
	R5420	D0GA273JA015	M 27K OHM J ,0.063W	1	
	R5421	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R5422	D0GA683JA015	M 68KOHM, J,0.063W	1	
	R5423	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R5424	D0GA683JA015	M 68KOHM, J,0.063W	1	
	R5431	D0GA222JA015	M 2.2KOHM, J,0.063W	1	
	R5432	D0GA332JA015	M 3.3KOHM, J,0.063W	1	
	R5433	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R5434	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R5435	ERJ6GEYJ221V	M 220 OHM,J,1/ 10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5437	D0GA222JA015	M 2.2KOHM, J, 0.063W	1	
	R5438	D0GA472JA015	M 4.7KOHM, J, 0.063W	1	
	R5439	ERJ6GEYJ471	M 470 OHM, J, 1/10W	1	
	R5441	ERJ2GEJ221	M 220 OHM, J, 0.063W	1	
	R5444	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R5445	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R5451	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R5452	ERJ6GEYJ104V	M 100KOHM, J, 1/10W	1	
	R5453	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R5454	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R5455	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R5456	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R5457	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R5458	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R5461	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R5470	D0GA222JA015	M 2.2KOHM, J, 0.063W	1	
	R5471	D0GA101JA015	M 100 OHM, J, 0.063W	1	
	R5472	D0GA470JA015	M 47 OHM, J, 0.063W	1	
	R5473	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R5474	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5475	D0GA123JA015	M 12K OHM J 0.063W	1	
	R5476	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R5477	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5478	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R5479	D0GA822JA015	M 8.2KOHM, J, 0.063W	1	
	R5481	D0GA472JA015	M 4.7KOHM, J, 0.063W	1	
	R5482	ERJ6GEYJ150V	M 15 OHM, J, 1/10W	1	
	R5485	D0GA101JA015	M 100 OHM, J, 0.063W	1	
	R5486	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R5489	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R5493	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5504	D1BB1241A087	M 1.24KOHM, 1/10W	1	
	R5505	D1BB1241A087	M 1.24KOHM, 1/10W	1	
	R5506	D1BB2101A087	M 2.1KOHM, 1/10W	1	
	R5507	D1BB1101A055	M 1.1 KOHM, 1/10W	1	
	R5508	D1BB8200A087	M 820 OHM, 1/10W	1	
	R5509	D1BB8200A087	M 820 OHM, 1/10W	1	
	R5510	D1BB2001A087	M 2KOHM, 1/10W	1	
	R5511	D1BB3601A055	M 3.6KOHM, 1/10W	1	
	R5512	D0GB100JA041	M 10 OHM J 1/10W	1	
	R5513	D0GB100JA041	M 10 OHM J 1/10W	1	
	R5514	D0GB100JA041	M 10 OHM J 1/10W	1	
	R5515	D0GB100JA041	M 10 OHM J 1/10W	1	
	R5516	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R5517	D1BB1002A055	M 10KOHM, 1/10W	1	
	R5518	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R5519	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R5520	D1BB1502A055	M 15KOHM, 1/10W	1	
	R5521	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R5522	D1BB2002A055	M 20KOHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R5523	D1BB2402A055	M 24KOHM, 1/10W	1	
	R5528	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5540	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R5571	D0GA683JA015	M 68KOHM, J, 0.063W	1	
	R5600	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R5603	D0GA2R2JA014	M 2.2OHM, J, 0.063W	1	
	R5607	D0GA223JA015	M 22K OHM J 0.063W	1	
	R5608	D0GA683JA015	M 68KOHM, J, 0.063W	1	
	R5609	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5610	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R5611	D0GA222JA015	M 2.2KOHM, J, 0.063W	1	
	R5612	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5613	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R5640	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5641	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5642	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R5643	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R5644	D0GA752JA015	M 7.5KOHM, J, 0.063W	1	
	R5681	D1BB1002A055	M 10KOHM, 1/10W	1	
	R5682	D1BB1501A055	M 1.50KOHM, 1/10W	1	
	R5683	D1BB6201A055	M 6.20KOHM, 1/10W	1	
	R5724	D0GA150JA015	M 15 OHM, J, 0.063W	1	PAVCCZ
	R6717	D0GA121JA015	M 120 OHM, J, 0.063W	1	
	R6718	D0GA121JA015	M 120 OHM, J, 0.063W	1	
	R6719	D0GA121JA015	M 120 OHM, J, 0.063W	1	
	R6720	D0GA121JA015	M 120 OHM, J, 0.063W	1	
	R6721	D0GA121JA015	M 120 OHM, J, 0.063W	1	
	R6731	D0GA121JA015	M 120 OHM, J, 0.063W	1	
	R6732	D0GA121JA015	M 120 OHM, J, 0.063W	1	
	R6733	D0GA121JA015	M 120 OHM, J, 0.063W	1	
	R6734	D0GA121JA015	M 120 OHM, J, 0.063W	1	
	R6735	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R6736	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R6737	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R6739	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6740	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6741	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6742	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6743	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6744	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6745	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6746	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6747	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6748	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6749	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6851	D0GBR00Z0002	M 0 OHM J 1/10W	1	
	R6853	D0GBR00Z0002	M 0 OHM J 1/10W	1	
	R6854	D0GBR00Z0002	M 0 OHM J 1/10W	1	
	R6857	D0GB680JA041	M 68 OHM J 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R6858	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6859	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R6879	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6881	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6882	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6883	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6884	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6885	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6886	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6887	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6888	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6889	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6890	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6891	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R6893	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R6894	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R6895	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R6897	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R6906	D0GB104JA041	M 100KOHM J 1/10W	1	
	R6908	D1BB1002A055	M 10KOHM, 1/10W	1	
	R6909	D1BB4701A055	M 4.7KOHM, 1/10W	1	
	R6910	D0GB680JA041	M 68 OHM J 1/10W	1	
	R6913	D0GB222JA041	M 2.2KOHM,J,1/10W	1	
	R6914	D0GB2R2JA057	M 2.2OHM J 1/10W	1	
	R6916	D0GBR00Z0002	M 0 OHM J 1/10W	1	
	R6917	D0GB390JA041	M 39 OHM,J,1/10W	1	
	R6918	D1BB3900A055	M 390 OHM, 1/10W	1	PAVCCZ
	R6919	D0GBR00Z0002	M 0 OHM J 1/10W	1	
	R6936	D0GA332JA015	M 3.3KOHM, J,0.063W	1	
	R6938	EXB2HV680J	RESISTOR ARRAY	1	
	R6939	D0GA471JA015	M 470OHM, J,0.063W	1	
	R6940	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R6942	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R6943	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R6944	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R6947	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R6948	D0GB222JA041	M 2.2KOHM,J,1/10W	1	
	R6949	D0GB222JA041	M 2.2KOHM,J,1/10W	1	
	R6950	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R6951	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R6952	EXB2HV103JV	RESISTOR ARRAY	1	
	R8000	D0GA331JA015	M 330 OHM, J,0.063W	1	
	R8031	D0GA222JA015	M 2.2KOHM, J,0.063W	1	
	R8100	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8102	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8103	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8105	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8109	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8110	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8111	D0GA560JA015	M 56 OHM, J,0.063W	1	
	R8112	D0GA560JA015	M 56 OHM, J,0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8114	D0GA560JA015	M 56 OHM, J,0.063W	1	
	R8115	D0GA560JA015	M 56 OHM, J,0.063W	1	
	R8116	D0GA560JA015	M 56 OHM, J,0.063W	1	
	R8117	ERJ2GEJ104	M 100KOHM, J,0.063W	1	
	R8119	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8120	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8240	D1BA2400A014	M240 OHM, 1/10W	1	
	R8246	D0GA330JA015	M 33 OHM, J,0.063W	1	
	R8247	D0GA330JA015	M 33 OHM, J,0.063W	1	
	R8253	D1BA1001A014	M 1KOHM, 1/10W	1	
	R8254	D1BA1001A014	M 1KOHM, 1/10W	1	
	R8255	D1BA1001A014	M 1KOHM, 1/10W	1	
	R8270	D1BA1001A014	M 1KOHM, 1/10W	1	
	R8271	D1BA1001A014	M 1KOHM, 1/10W	1	
	R8272	D1BA1001A014	M 1KOHM, 1/10W	1	
	R8277	D1BA1001A014	M 1KOHM, 1/10W	1	
	R8278	D1BA1001A014	M 1KOHM, 1/10W	1	
	R8279	D1BA1001A014	M 1KOHM, 1/10W	1	
	R8280	D1BA1001A014	M 1KOHM, 1/10W	1	
	R8281	D1BA1001A014	M 1KOHM, 1/10W	1	
	R8282	D1BA1001A014	M 1KOHM, 1/10W	1	
	R8283	D1BA1001A014	M 1KOHM, 1/10W	1	
	R8284	D1BA1001A014	M 1KOHM, 1/10W	1	
	R8285	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8286	ERJ2GEJ221	M 220 OHM, J,0.063W	1	
	R8287	D1BA2400A014	M240 OHM, 1/10W	1	
	R8288	D1BA2400A014	M240 OHM, 1/10W	1	
	R8289	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8300	EXB2HV680J	RESISTOR ARRAY	1	
	R8301	ERJ2GEJ103	M 10KOHM, J,0.063W	1	
	R8302	D0GA471JA015	M 470OHM, J,0.063W	1	
	R8303	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R8304	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R8305	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R8306	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R8309	D0GA222JA015	M 2.2KOHM, J,0.063W	1	
	R8310	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R8315	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8316	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8322	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8323	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8324	D0GA561JA015	M 560OHM, J,0.063W	1	PAVCCZ
	R8325	D0GA561JA015	M 560OHM, J,0.063W	1	PAVCCZ
	R8326	D0GA472JA015	M 4.7KOHM, J,0.063W	1	
	R8327	D0GA472JA015	M 4.7KOHM, J,0.063W	1	
	R8340	EXB2HV680J	RESISTOR ARRAY	1	
	R8341	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R8342	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R8343	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R8344	D0GA680JA015	M 47 OHM, J,0.063W	1	
	R8346	EXB28V680JX	RESISTOR ARRAY	1	
	R8347	EXB2HV103JV	RESISTOR ARRAY	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8348	EXB28V103JX	RESISTOR ARRAY	1	
	R8349	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8350	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8351	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8355	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8356	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8357	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8358	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8360	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8361	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8362	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8363	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8364	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8365	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8366	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8367	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8368	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8369	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8370	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8371	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8372	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8373	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8374	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8375	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8376	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8377	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8378	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8379	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8380	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8381	D1BA75R0A014	M0.75KOHM, 1/10W	1	
	R8382	D1BA75R0A014	M0.75KOHM, 1/10W	1	
	R8383	D1BA75R0A014	M0.75KOHM, 1/10W	1	
	R8384	D1BA75R0A014	M0.75KOHM, 1/10W	1	
	R8385	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8386	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8387	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8388	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8389	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8390	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8391	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8392	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8393	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8394	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8395	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8396	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8397	EXB2HV103JV	RESISTOR ARRAY	1	
	R8404	EXB2HV680J	RESISTOR ARRAY	1	
	R8406	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8407	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8408	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8409	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8410	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8411	D0GA680JA015	M 47 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8412	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8413	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8414	EXB28V151J	RESISTOR ARRAY	1	
	R8415	EXB28V104JX	RESISTOR ARRAY	1	
	R8416	EXB28V151J	RESISTOR ARRAY	1	
	R8417	EXB28V104JX	RESISTOR ARRAY	1	
	R8419	EXB2HV101J	RESISTOR ARRAY	1	
	R8420	EXB2HV101J	RESISTOR ARRAY	1	
	R8422	EXB2HV680J	RESISTOR ARRAY	1	
	R8423	EXB2HV680J	RESISTOR ARRAY	1	
	R8424	EXB28V680JX	RESISTOR ARRAY	1	
	R8425	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8426	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8428	D0GA222JA015	M 2.2KOHM, J, 0.063W	1	
	R8429	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R8430	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R8431	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8432	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8433	ERJ8RSJR10	M 1 OHM, 1/8W	1	
	R8434	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R8436	D0GA223JA015	M 22K OHM J 0.063W	1	
	R8437	D0GA223JA015	M 22K OHM J 0.063W	1	
	R8438	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8439	D0GA223JA015	M 22K OHM J 0.063W	1	
	R8440	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R8441	D0GA681JA015	M680 OHM, J, 0.063W	1	
	R8442	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8443	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8444	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8445	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8446	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8447	D0GA151JA015	M 150 OHM, J, 0.063W	1	
	R8448	D0GA151JA015	M 150 OHM, J, 0.063W	1	
	R8449	D0GA151JA015	M 150 OHM, J, 0.063W	1	
	R8450	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R8451	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8452	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8453	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8454	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R8455	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R8456	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R8457	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8458	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R8459	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R8460	D0GA680JA015	M 47 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8461	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8462	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8463	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8464	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8465	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8466	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8467	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8468	EXB2HV680J	RESISTOR ARRAY	1	
	R8469	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8470	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8471	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8472	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8473	D0GA222JA015	M 2.2KOHM, J, 0.063W	1	
	R8474	D0GA222JA015	M 2.2KOHM, J, 0.063W	1	
	R8480	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8481	D0GA223JA015	M 22K OHM J 0.063W	1	
	R8483	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8484	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8485	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8488	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8489	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8490	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8491	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8492	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8493	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8494	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8495	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8496	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8497	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8498	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8499	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8501	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8502	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8503	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8504	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8505	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8506	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8507	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8508	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8509	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8510	D0GA680JA015	M 47 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8511	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8515	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8516	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8524	D1BA49R9A014	M 49.9 OHM, 1/10W	1	
	R8525	D1BA49R9A014	M 49.9 OHM, 1/10W	1	
	R8526	D1BA49R9A014	M 49.9 OHM, 1/10W	1	
	R8527	D1BA49R9A014	M 49.9 OHM, 1/10W	1	
	R8566	D0GBR00Z0002	M 0 OHM J 1/10W	1	
	R8600	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8606	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8607	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8610	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8622	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8636	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8638	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8641	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8642	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8644	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8645	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8649	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8651	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8652	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8657	D0GA222JA015	M 2.2KOHM, J, 0.063W	1	
	R8658	D0GA222JA015	M 2.2KOHM, J, 0.063W	1	
	R8660	EXB2HV680J	RESISTOR ARRAY	1	
	R8661	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8668	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8669	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8672	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8673	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8680	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8685	D0GA222JA015	M 2.2KOHM, J, 0.063W	1	
	R8689	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8691	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8692	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8703	D0GA560JA015	M 56 OHM, J, 0.063W	1	
	R8704	D0GA560JA015	M 56 OHM, J, 0.063W	1	
	R8705	D0GA560JA015	M 56 OHM, J, 0.063W	1	
	R8706	D0GA560JA015	M 56 OHM, J, 0.063W	1	
	R8707	D0GA560JA015	M 56 OHM, J, 0.063W	1	
	R8708	D0GA560JA015	M 56 OHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8709	D0GA560JA015	M 56 OHM, J, 0.063W	1	
	R8710	D0GA560JA015	M 56 OHM, J, 0.063W	1	
	R8711	D0GA472JA015	M 4.7KOHM, J, 0.063W	1	
	R8712	D0GA472JA015	M 4.7KOHM, J, 0.063W	1	
	R8721	D0GA560JA015	M 56 OHM, J, 0.063W	1	
	R8722	D0GA560JA015	M 56 OHM, J, 0.063W	1	
	R8723	D0GA560JA015	M 56 OHM, J, 0.063W	1	
	R8724	D0GA560JA015	M 56 OHM, J, 0.063W	1	
	R8725	D0GA560JA015	M 56 OHM, J, 0.063W	1	
	R8726	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8727	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8728	D0GA560JA015	M 56 OHM, J, 0.063W	1	
	R8729	D0GA560JA015	M 56 OHM, J, 0.063W	1	
	R8730	D0GA560JA015	M 56 OHM, J, 0.063W	1	
	R8731	D0GA560JA015	M 56 OHM, J, 0.063W	1	
	R8732	D0GA560JA015	M 56 OHM, J, 0.063W	1	
	R8733	D0GA560JA015	M 56 OHM, J, 0.063W	1	
	R8734	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8735	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8737	D1BA6491A014	M6.49KOHM, 1/10W	1	
	R8739	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8743	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8744	D1BA6201A014	M6.2KOHM, 1/16W	1	
	R8746	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8747	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8748	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8754	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8757	D1BA1600A014	M160 OHM, 1/10W	1	
	R8758	D1BA2402A014	M 24KOHM, 1/10W	1	
	R8759	D1BA1002A014	M 10KOHM, 1/10W	1	
	R8760	D1BA2402A014	M 24KOHM, 1/10W	1	
	R8761	D1BA6201A014	M6.2KOHM, 1/16W	1	
	R8763	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8764	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8825	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8856	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R8857	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8858	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8859	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8860	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8861	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8862	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8863	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8864	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8867	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R8868	D0GA330JA015	M 33 OHM, J, 0.063W	1	
	R8869	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8870	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8871	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R8872	D0GA330JA015	M 33 OHM, J, 0.063W	1	
	R8873	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8874	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8875	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8876	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8877	D0GA330JA015	M 33 OHM, J, 0.063W	1	
	R8878	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8879	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8880	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8881	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8882	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8883	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8885	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8886	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8887	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R8888	D0GBR00Z0002	M 0 OHM J 1/10W	1	
	R8918	EXB2HV680J	RESISTOR ARRAY	1	
	R8919	EXB2HV680J	RESISTOR ARRAY	1	
	R8922	EXB2HVR000	RESISTOR ARRAY	1	
	R8923	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8924	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8925	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8926	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8927	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8928	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R8950	D0GA472JA015	M 4.7KOHM, J, 0.063W	1	
	R8952	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R9014	D1BB5601A055	M 5.6KOHM, 1/10W	1	
	R9015	D0GA390JA015	M 39 OHM, J, 0.063W	1	
	R9016	D0GA2R2JA014	M 2.2OHM, J, 0.063W	1	
	R9017	D1BB4701A055	M 4.7KOHM, 1/10W	1	
	R9019	D0GA2R2JA014	M 2.2OHM, J, 0.063W	1	
	R9035	D0GA332JA015	M 3.3KOHM, J, 0.063W	1	
	R9036	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9037	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R9038	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9039	D0GA473JA015	M 47 OHM, J, 0.063W	1	
	R9040	D0GA472JA015	M 4.7KOHM, J, 0.063W	1	
	R9104	D0GA390JA015	M 39 OHM, J, 0.063W	1	
	R9107	D0GA332JA015	M 3.3KOHM, J, 0.063W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R9110	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R9120	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R9121	D0GA680JA015	M 47 OHM, J, 0.063W	1	
	R9127	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R9132	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R9133	D1BB1202A055	M 12KOHM, 1/10W	1	
	R9134	D1BB1002A055	M 10KOHM, 1/10W	1	
	R9135	D1BB2702A055	M 27KOHM, 1/10W	1	
	R9198	EXB28V101JX	RESISTOR ARRAY	1	
	R9203	D0GA272JA015	M 2.7KOHM, J, 0.063W	1	
	R9205	D0GA333JA015	M 33KOHM, J, 0.063W	1	
	R9206	D0GA563JA015	M 56KOHM, J, 0.063W	1	
	R9208	EXB2HV470JV	RESISTOR ARRAY	1	
	R9209	EXB2HV470JV	RESISTOR ARRAY	1	
	R9224	D0GA470JA015	M 47 OHM, J, 0.063W	1	
	R9226	D0GA470JA015	M 47 OHM, J, 0.063W	1	
	R9247	D0GA470JA015	M 47 OHM, J, 0.063W	1	
	R9300	EXB28VR000X	RESISTOR ARRAY	1	
	R9306	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R9307	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R9308	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R9309	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R9318	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9320	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9321	D0GA105JA015	M 1M OHM, J, 0.063W	1	
	R9323	ERJ2GEJ102X	M 1K OHM J 1/4W	1	
	R9324	D0GB162JA041	N 1.6KOHM J 1/ 10W	1	
	R9325	D0GB162JA041	N 1.6KOHM J 1/ 10W	1	
	R9326	D0GB162JA041	N 1.6KOHM J 1/ 10W	1	
	R9327	D0GB162JA041	N 1.6KOHM J 1/ 10W	1	
	R9334	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R9335	D0GAR00Z0001	C 0 OHM, 0.063W	1	
	R9400	EXB2HV103JV	RESISTOR ARRAY	1	
	R9401	EXB2HV103JV	RESISTOR ARRAY	1	
	R9402	EXB28V103JX	RESISTOR ARRAY	1	
	R9608	EXB2HV470JV	RESISTOR ARRAY	1	
	R9609	EXB2HV470JV	RESISTOR ARRAY	1	
	R9610	EXB2HV470JV	RESISTOR ARRAY	1	
	R9872	D1BB3301A055	M 3.3KOHM, 1/10W	1	
	R9873	D1BB1002A055	M 10KOHM, 1/10W	1	
	R9874	D1BB2702A055	M 27KOHM, 1/10W	1	
	R9875	D1BB2002A055	M 20KOHM, 1/10W	1	
	R9877	D1BB4702A055	M 47KOHM, 1/10W	1	
	R9878	D1BB1002A055	M 10KOHM, 1/10W	1	
	R9879	D1BB1502A055	M 15KOHM, 1/10W	1	
	R9903	D0GA472JA015	M 4.7KOHM, J, 0.063W	1	
	R9904	ERJ2GEJ104	M 100KOHM, J, 0.063W	1	
	R9905	ERJ2GEJ103	M 10KOHM, J, 0.063W	1	
	R9907	D0GA101JA015	M 100 OHM, J, 0.063W	1	
	RM2510	B3RAD0000168	REMOTE SENSOR	1	
	SN2510	B3JB00000078	IC	1	PAVCCZ
	SW2500	K0F122A00031	SWITCH	1	
	SW2550	K0H1BA000445	SWITCH	1	
	SW2551	K0H1BA000445	SWITCH	1	
	SW2552	K0H1BA000445	SWITCH	1	
	SW2553	K0H1BA000445	SWITCH	1	
	SW2554	K0H1BA000445	SWITCH	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
		T8301	G5BYC0000015	TRANS	1
	⚠	TU2901	ENGF7801KF	TUNER	1 PAVCCZ
	⚠	TU6851	ENV57S03D8F	TUNER	1 PAVCCZ
		X1100	H0J100500035	CRYSTAL	1
		X6851	H0J410500001	CRYSTAL	1 PAVCCZ
		X8002	H0J245500101	CRYSTAL	1
		X8100	H0J270500120	CRYSTAL	1
		X8300	H0J410500001	CRYSTAL	1 PAVCCZ
		X9300	H0J200500076	CRYSTAL	1
		XW3	K1KY30AA0369	30P CONNECTOR	1
		C10	K1MY40BA0345	40P CONNECTOR	1 PAVCCZ
		C20	K1MY40BA0345	40P CONNECTOR	1 PAVCCZ
		C21	K1MY68BA0345	68P CONNECTOR	1
		C26	K1MN20BA0231	20P CONNECTOR	1
		C31	K1MY68BA0345	68P CONNECTOR	1
		C33	K1KY08AA0719	8P CONNECTOR	1
		C35	K1KA04BA0107	4P CONNECTOR	1
		C36	K1MY20BA0345	20P CONNECTOR	1
		C16002	F1L2J562A022	C 5600UF, K, 6.3V	1
		C16012	F2A2T301A004	E 300UF, 220V	1
		C16013	F2A2T301A004	E 300UF, 220V	1
		C16018	F0C2E155A252	E 0.015UF, 250V	1
		C16024	F1L2J332A022	C 3300UF, K, 6.3V	1
		C16041	F1H1H392A970	C 3900PF, K, 50V	1
		C16071	F1L2J1020001	C 1000UF, K, 6.3V	1
		C16072	F1L2J332A022	C 3300UF, K, 6.3V	1
		C16091	F1L2J1020001	C 1000UF, K, 6.3V	1
		C16092	F1L2J1020001	C 1000UF, K, 6.3V	1
		C16101	F1L2J222A022	C 2200UF, K, 6.3V	1
		C16104	F1H1E470A130	C 47UF, K, 25V	1
		C16105	F1H1E470A130	C 47UF, K, 25V	1
		C16131	F1K1E475A134	C 4.7UF, Z, 25V	1
		C16133	F1K1E475A134	C 4.7UF, Z, 25V	1
		C16135	F1K1E105A029	C 1UF, Z, 25V	1
		C16151	F1K1E105A029	C 1UF, Z, 25V	1
		C16152	F1K1E475A134	C 4.7UF, Z, 25V	1
		C16153	F1K1E475A134	C 4.7UF, Z, 25V	1
		C16154	F1K1E475A134	C 4.7UF, Z, 25V	1
		C16191	F1K1E475A134	C 4.7UF, Z, 25V	1
		C16192	F1H1E104A129	C 0.1UF, 25V	1
		C16193	EEUFC1E470	E 47UF, 25V	1
		C16195	F1K1E105A029	C 1UF, Z, 25V	1
		C16201	F0C2E405A230	E 0.040UF, 250V	1
		C16202	F0C2E405A230	E 0.040UF, 250V	1
		C16203	F0C2E405A230	E 0.040UF, 250V	1
		C16242	F1H1C105A145	C 0.01UF, K, 16V	1
		C16243	F1H1H103A970	C 0.001UF, K, 50V	1
		C16244	F1J1A106A087	C 0.010UF, K, 10V	1
		C16251	F1H1C105A145	C 0.01UF, K, 16V	1
		C16252	F1K1E105A029	C 1UF, Z, 25V	1
		C16271	EEUFC1E221	E 220UF, 25V	1
		C16280	F1K1E105A029	C 1UF, Z, 25V	1
		C16285	F1H1H104A970	C 0.1UF, K, 50V	1
		C16286	F1H1H104A970	C 0.1UF, K, 50V	1
		C16287	F1H1H104A970	C 0.1UF, K, 50V	1
		C16314	F2A2T301A004	E 300UF, 220V	1
		C16315	ECJ1VB1A105K	C 1 UF, K, 10 V	1
		C16316	F1H1C104A143	C 0.1UF, K, 16V	1
		C16317	ECJ1VB1A105K	C 1 UF, K, 10 V	1
		C16318	F1J1H104A835	C 0.10UF, 50V	1
		C16319	F1J1H104A835	C 0.10UF, 50V	1
		C16328	F2A2C221A195	E 2200UF, 160V	1
		C16331	F0C2E105A252	E 0.010UF, 250V	1
		C16401	F1L2J562A022	C 5600UF, K, 6.3V	1
		C16412	F2A2T251A004	E 250UF, 220V	1
		C16413	F0C2E155A252	E 0.015UF, 250V	1

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C16414	F2A2T251A004	E 250UF, 220V	1	
	C16415	F2A2T251A004	E 250UF, 220V	1	
	C16417	F2A2T251A004	E 250UF, 220V	1	
	C16421	F1L2J562A022	C 5600UF, K, 6.3V	1	
	C16441	F1H1H392A970	C 3900PF, K, 50V	1	
	C16451	F1H1H392A970	C 3900PF, K, 50V	1	
	C16460	F1E2J222A002	C 2200PF, 600V	1	
	C16461	F1L2J1020001	C 1000UF, K, 6.3V	1	
	C16471	F1L2J1020001	C 1000UF, K, 6.3V	1	
	C16472	F1K1E105A029	C 1UF, Z, 25V	1	
	C16481	F1L2J1020001	C 1000UF, K, 6.3V	1	
	C16490	F1H1C105A145	C 0.01UF, K, 16V	1	
	C16491	F1L2J1020001	C 1000UF, K, 6.3V	1	
	C16501	F1K1E105A029	C 1UF, Z, 25V	1	
	C16502	F1K1E475A134	C 4.7UF, Z, 25V	1	
	C16503	F2A1E471A102	E 470UF, 25V	1	
	C16504	F1K1E475A134	C 4.7UF, Z, 25V	1	
	C16505	F1K1E105A029	C 1UF, Z, 25V	1	
	C16521	F1K1E105A029	C 1UF, Z, 25V	1	
	C16522	F1K1E475A134	C 4.7UF, Z, 25V	1	
	C16523	F2A1E471A102	E 470UF, 25V	1	
	C16524	F1K1E475A134	C 4.7UF, Z, 25V	1	
	C16525	F1K1E475A134	C 4.7UF, Z, 25V	1	
	C16534	F1K1E105A029	C 1UF, Z, 25V	1	
	C16561	F1J1A106A087	C 0.010UF, K, 10V	1	
	C16562	F1H1C105A145	C 0.01UF, K, 16V	1	
	C16564	F1H1C105A145	C 0.01UF, K, 16V	1	
	C16565	F1H1H103A970	C 0.001UF, K, 50V	1	
	C16566	F1H1H103A970	C 0.001UF, K, 50V	1	
	C16581	F1K1E105A029	C 1UF, Z, 25V	1	
	C16582	F1H1C105A145	C 0.01UF, K, 16V	1	
	C16593	F1H1H102A971	C 1000PF, K, 50V	1	
	C16602	F1H1H220A971	C 22PF, K, 50V	1	
	C16603	F1K2J102A014	C 1000UF, K, 6.3V	1	
	C16604	F1K2J102A014	C 1000UF, K, 6.3V	1	
	C16608	F1H1H221A971	C 220UF, K, 50V	1	
	C16631	F0C2E405A230	E 0.040UF, 250V	1	
	C16632	F0C2E405A230	E 0.040UF, 250V	1	
	C16633	F0C2E405A230	E 0.040UF, 250V	1	
	C16641	F1K2J222A014	C 2200UF, K, 6.3V	1	
	C16642	F1L2J562A022	C 5600UF, K, 6.3V	1	
	C16645	F1K2J102A014	C 1000UF, K, 6.3V	1	
	C16646	F1K2J102A014	C 1000UF, K, 6.3V	1	
	C16661	F1K2J102A038	C 1000UF, K, 6.3V	1	
	C16662	F1K2J102A038	C 1000UF, K, 6.3V	1	
	C16664	F1H1H820A971	C 82UF, 50V	1	
	C16665	F1H1H820A971	C 82UF, 50V	1	
	C16666	F1H1H820A971	C 82UF, 50V	1	
	C16668	F1H1H221A971	C 220UF, K, 50V	1	
	C16675	F1H1H391A971	C 391UF, 50V	1	
	C16684	F1H1H104A970	C 0.1UF, K, 50V	1	
	C16685	F1H1H104A970	C 0.1UF, K, 50V	1	
	C16691	F2A2C101A097	E 1000UF, 160V	1	
	C16692	F1H1H104A970	C 0.1UF, K, 50V	1	
	C16707	F1H1H220A971	C 22PF, K, 50V	1	
	C16708	F1H1H104A970	C 0.1UF, K, 50V	1	
	C16721	F2A1H820A115	E 82UF, 50V	1	
	C16723	F1K1E105A029	C 1UF, Z, 25V	1	
	C16724	F1K1E475A134	C 4.7UF, Z, 25V	1	
	C16753	F1K1E475A134	C 4.7UF, Z, 25V	1	
	C16755	F1K1E475A134	C 4.7UF, Z, 25V	1	
	C16756	F1K1E475A134	C 4.7UF, Z, 25V	1	
	C16771	F1H1C105A145	C 0.01UF, K, 16V	1	
	C16773	F1K1E105A029	C 1UF, Z, 25V	1	
	C16791	EEUFC1E221	E 220UF, 25V	1	
	C16793	EEUFC1E221	E 220UF, 25V	1	
	C16794	F1J1A106A087	C 0.010UF, K, 10V	1	
	C16795	F2A1E471A102	E 470UF, 25V	1	
	C16796	F2A1E471A102	E 470UF, 25V	1	
	C16797	F1H1H104A970	C 0.1UF, K, 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C16813	F2A2T221A009	E 220UF, 220V	1	
	C16842	F2A2C101A097	E 1000UF, 160V	1	
	C16843	F1J1H104A835	C 0.10UF, 50V	1	
	C16844	F1J1H104A835	C 0.10UF, 50V	1	
	C16854	F1J1H104A835	C 0.10UF, 50V	1	
	C16856	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C16857	F1H1C104A143	C 0.1UF, K, 16V	1	
	C16858	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C16859	F1J1H104A835	C 0.10UF, 50V	1	
	C16860	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C16861	F1H1C104A143	C 0.1UF, K, 16V	1	
	C16862	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C16863	F1J1H104A835	C 0.10UF, 50V	1	
	C16864	F1J1H104A835	C 0.10UF, 50V	1	
	C16891	F1K1E105A029	C 1UF, Z, 25V	1	
	C16902	F1E2J332A002	C 3300PF, 600V	1	
	C17100	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C17101	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C17104	F1L2A334A034	E 3300UF, 100V	1	PAVCCZ
	C17105	F1L2A334A034	E 3300UF, 100V	1	PAVCCZ
	C17106	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C17107	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C17110	F1L2A334A034	E 3300UF, 100V	1	PAVCCZ
	C17111	F1L2A334A034	E 3300UF, 100V	1	PAVCCZ
	C17200	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C17202	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C17203	F1L2A334A034	E 3300UF, 100V	1	PAVCCZ
	C17204	F1L2A334A034	E 3300UF, 100V	1	PAVCCZ
	C17210	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C17211	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C17212	F1L2A334A034	E 3300UF, 100V	1	PAVCCZ
	C17213	F1L2A334A034	E 3300UF, 100V	1	PAVCCZ
	C17216	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17241	F1H1H101A971	C 100UF, 50V	1	
	C17300	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C17301	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17302	F1L2A334A034	E 3300UF, 100V	1	PAVCCZ
	C17303	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C17306	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C17307	F1L2A334A034	E 3300UF, 100V	1	PAVCCZ
	C17313	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C17314	F1L2A334A034	E 3300UF, 100V	1	PAVCCZ
	C17315	F1H1C104A143	C 0.1UF, K, 16V	1	
	C17317	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C17318	F1L2A334A034	E 3300UF, 100V	1	PAVCCZ
	C17319	F1L2A334A034	E 3300UF, 100V	1	PAVCCZ
	C17320	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C17323	ECJ1VB1A105K	C 1 UF, K, 10 V	1	
	C17324	F1L2A334A034	E 3300UF, 100V	1	PAVCCZ
	C17325	F1L2A334A034	E 3300UF, 100V	1	PAVCCZ
	C17341	F1H1H101A971	C 100UF, 50V	1	
	CB1	K1MY55B00002	55P CONNECTOR	1	
	CB2	K1MY55B00002	55P CONNECTOR	1	
	CB3	K1MY55B00002	55P CONNECTOR	1	
	CB4	K1MY55B00002	55P CONNECTOR	1	
	CB5	K1MY55B00002	55P CONNECTOR	1	
	CB6	K1MY55B00002	55P CONNECTOR	1	
	CB7	K1MY55B00002	55P CONNECTOR	1	
	CB8	K1MY55B00002	55P CONNECTOR	1	
	CB9	K1MY55B00002	55P CONNECTOR	1	
	CB10	K1MY55B00002	55P CONNECTOR	1	
	CB11	K1MY55B00002	55P CONNECTOR	1	
	CB12	K1MY55B00002	55P CONNECTOR	1	
	CB13	K1MY55B00002	55P CONNECTOR	1	
	CB14	K1MY55B00002	55P CONNECTOR	1	
	CB15	K1MY55B00002	55P CONNECTOR	1	
	D16001	BOFCCN000003	DIODE	1	PAVCCZ
	D16021	BOFCCN000003	DIODE	1	PAVCCZ
	D16022	BOFCCN000003	DIODE	1	PAVCCZ
	D16032	BOACCJ000048	DIODE	1	
	D16041	BOFCCP000001	DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D16050	B0ECKP000055	DIODE	1	
	D16051	B0FCCN000002	DIODE	1	
	D16101	B0JCME000093	DIODE	1	
	D16131	B0ECKP000055	DIODE	1	
	D16151	B0ECKP000055	DIODE	1	
	D16152	B0ECKP000055	DIODE	1	
	D16153	B0ECKP000055	DIODE	1	
	D16191	B0ECKP000055	DIODE	1	
	D16192	B0ACCCJ000048	DIODE	1	
	D16196	DZ2J200M0L	ZENER DIODE	1	
	D16253	B3ABB0000210	LED	1	
	D16255	B0ACCCJ000048	DIODE	1	
	D16280	B0ACCCJ000048	DIODE	1	
	D16281	DZ2J051M0L	ZENER DIODE	1	
	D16282	DZ2J068M0L	ZENER DIODE	1	PAVCCZ
	D16285	B0ADEJ000035	ZENER DIODE	1	
	D16286	B0ACCCJ000048	DIODE	1	
	D16315	DZ2J150M0L	ZENER DIODE	1	
	D16316	B0ECKP000055	DIODE	1	
	D16317	B0ECKP000055	DIODE	1	
	D16401	DA3DF50ACSLW	ZENER DIODE	1	
	D16402	DA3DF50ACSLW	ZENER DIODE	1	
	D16407	B0JCME000093	DIODE	1	
	D16411	B0ACCCJ000048	DIODE	1	
	D16422	B0FACCP000005	DIODE	1	
	D16451	B0ECKP000055	DIODE	1	
	D16461	B0FACCP000005	DIODE	1	
	D16466	B0ACCCJ000048	DIODE	1	
	D16473	B0ACCCJ000048	DIODE	1	
	D16474	B0ACCCJ000048	DIODE	1	
	D16475	DZ2J051M0L	ZENER DIODE	1	
	D16476	B0ACCCJ000048	DIODE	1	
	D16477	DZ2J047L0L	ZENER DIODE	1	
	D16478	B0ACCCJ000048	DIODE	1	
	D16480	B0ACCCJ000048	DIODE	1	
	D16482	B0FACCP000005	DIODE	1	
	D16490	B0ECKP000055	DIODE	1	
	D16491	B0ECKP000055	DIODE	1	
	D16492	DZ2J047M0L	ZENER DIODE	1	
	D16493	B0ADCJ000100	DIODE	1	
	D16494	B0ADCJ000100	DIODE	1	
	D16497	B0ECKP000055	DIODE	1	
	D16503	B0ECHR000001	DIODE	1	
	D16522	B0ECHR000001	DIODE	1	
	D16523	B0ECHR000001	DIODE	1	
	D16534	B0ECHR000001	DIODE	1	
	D16536	B0ECHR000001	DIODE	1	
	D16583	B3ABB0000210	LED	1	
	D16602	DZ2J150M0L	ZENER DIODE	1	
	D16604	B0ADCJ000100	DIODE	1	
	D16605	DZ2J051L0L	ZENER DIODE	1	
	D16607	B0ACCCJ000048	DIODE	1	
	D16610	B0ACCCJ000048	DIODE	1	
	D16618	B0ECKP000055	DIODE	1	
	D16641	B0FBCN000006	DIODE	1	
	D16642	B0FBCN000006	DIODE	1	
	D16645	DZ2J150M0L	ZENER DIODE	1	
	D16646	DZ2J150M0L	ZENER DIODE	1	
	D16647	DZ2J150M0L	ZENER DIODE	1	
	D16648	DZ2J051L0L	ZENER DIODE	1	
	D16649	B0ACCCJ000048	DIODE	1	
	D16650	B0ACCCJ000048	DIODE	1	
	D16651	DZ2J051M0L	ZENER DIODE	1	
	D16652	B0ECKP000055	DIODE	1	
	D16653	B0ACCCJ000048	DIODE	1	
	D16654	B0ACCCJ000048	DIODE	1	
	D16662	DZ2J150M0L	ZENER DIODE	1	
	D16663	DZ2J150M0L	ZENER DIODE	1	
	D16664	DZ2J150M0L	ZENER DIODE	1	
	D16669	B0ACCCJ000048	DIODE	1	
	D16671	B0ACCCJ000048	DIODE	1	
	D16673	B0ECHR000001	DIODE	1	
	D16674	B0ECHR000001	DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D16677	B0ADEJ000035	ZENER DIODE	1	
	D16678	DZ2J15000L	ZENER DIODE	1	
	D16702	B0ACCCJ000048	DIODE	1	
	D16710	DZ2J15000L	ZENER DIODE	1	
	D16711	B0ECHR000001	DIODE	1	
	D16712	DZ2J15000L	ZENER DIODE	1	
	D16713	B0ECHR000001	DIODE	1	
	D16719	B0ECKP000055	DIODE	1	
	D16720	B0ECKP000055	DIODE	1	
	D16721	B0ECHR000001	DIODE	1	
	D16728	B0ECKP000055	DIODE	1	
	D16765	B0ECKP000055	DIODE	1	
	D16790	B0JCME000093	DIODE	1	
	D16791	DZ2J200M0L	ZENER DIODE	1	
	D16792	B0ACCCJ000048	DIODE	1	
	D16820	B0ACCCJ000048	DIODE	1	
	D16821	DZ2J330M0L	ZENER DIODE	1	
	D16822	B0ADCJ000100	DIODE	1	
	D16824	DZ2J330M0L	ZENER DIODE	1	
	D16825	DZ2J330M0L	ZENER DIODE	1	
	D16859	B0HCKS000002	DIODE	1	
	D16871	DZ2J240M0L	ZENER DIODE	1	
	D16872	DZ2J200M0L	ZENER DIODE	1	
	D16874	DZ2J051M0L	ZENER DIODE	1	
	D16875	B0ACCCJ000048	DIODE	1	
	D16893	DZ2J056H0L	ZENER DIODE	1	
	D16901	B0ADCJ000100	DIODE	1	
	D16902	B0ACCCJ000048	DIODE	1	
	D16920	B0ADCJ000100	DIODE	1	
	IC16131	C0ZBZ0001707	IC	1	
	IC16151	C0ZBZ0001708	IC	1	
	IC16241	C0JBAU000043	IC	1	
	IC16251	C0BBBA000024	IC	1	
	IC16304	MIP3900MSSCF	IC	1	
	IC16312	C0DBZMC00006	IC	1	
	IC16471	C0DBEYY00114	IC	1	
	IC16490	C0DBZMC00006	IC	1	
	IC16491	NJM2406F	LINEAR IC	1	
	IC16501	C0ZBZ0001708	IC	1	
	IC16521	C0ZBZ0001708	IC	1	
	IC16561	C0JBAU000043	IC	1	
	IC16562	C0JBAU000043	IC	1	
	IC16563	C0JBAB0000916	IC	1	
	IC16581	C0BBBA000024	IC	1	
	IC16661	C0BBBA000024	IC	1	
	IC16691	C0JBAC000363	IC	1	
	IC16692	C0DBZYY00352	IC	1	
	IC16724	C0CBADE00049	IC	1	
	IC16771	C0CBADC00072	IC	1	
	IC16773	C0JBAB000715	IC	1	
	IC16784	MIP3910MSSCF	IC	1	
	IC16785	C0DBZYY00352	IC	1	
	IC16786	MIP3910MSSCF	IC	1	
	IC16787	C0DBZYY00352	IC	1	
	IC16792	NJM2406F	LINEAR IC	1	
	IC16793	C0DBZMC00006	IC	1	
	IC16920	C0BBBA000024	IC	1	
	IC17201	C0JBAU000043	IC	1	
	IC17300	C0JBAU000043	IC	1	
	IC17302	C0JBAZ002692	IC	1	
	L16001	G0CR82K00005	PEAKING COIL	1	PAVCCZ
	L16002	G0CR82K00005	PEAKING COIL	1	PAVCCZ
	L16011	G0CR82K00005	PEAKING COIL	1	PAVCCZ
	L16013	G0CR82K00005	PEAKING COIL	1	PAVCCZ
	L16303	G0C471MA0049	PEAKING COIL	1	PAVCCZ
	L16401	G0CR82K00005	PEAKING COIL	1	PAVCCZ
	L16402	G0CR82K00005	PEAKING COIL	1	PAVCCZ
	L16412	G0CR82K00005	PEAKING COIL	1	PAVCCZ
	L16413	G0CR82K00005	PEAKING COIL	1	PAVCCZ
	L16472	G0ZZ00002183	PEAKING COIL	1	
	L16698	G0C681MA0065	PEAKING COIL	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	L16851	G0ZZ00002183	PEAKING COIL	1	
	PC16191	B3PBA0000496	IC	1	
	PC16301	B3PBA0000498	IC	1	
	PC16461	B3PBE0000054	IC	1	
	PC16480	B3PBA0000498	IC	1	
	PC16603	B3PBA0000498	IC	1	
	PC16684	B3PBA0000496	IC	1	
	PC16685	B3PBA0000496	IC	1	
	PC16722	B3PBA0000498	IC	1	
	PC16723	B3PBA0000498	IC	1	
	PC16896	B3PBA0000498	IC	1	
	PC16897	B3PBA0000498	IC	1	
	Q16001	B1JBEN000002	TRANSISTOR	1	PAVCCZ
	Q16002	B1JBEN000002	TRANSISTOR	1	PAVCCZ
	Q16022	B1JBEN000002	TRANSISTOR	1	PAVCCZ
	Q16023	B1JBEN000002	TRANSISTOR	1	PAVCCZ
	Q16041	B1JBEN000003	TRANSISTOR	1	PAVCCZ
	Q16051	B1JBEN000003	TRANSISTOR	1	PAVCCZ
	Q16055	B1HFFPA00001	TRANSISTOR	1	
	Q16056	B1HFFPA00001	TRANSISTOR	1	
	Q16101	B1CFRM000008	FET	1	
	Q16102	B1CFRM000008	FET	1	
	Q16141	B1HFFPA00001	TRANSISTOR	1	
	Q16161	B1HFFPA00001	TRANSISTOR	1	
	Q16191	B1HFFPA00001	TRANSISTOR	1	
	Q16251	B1ABCF000231	TRANSISTOR	1	
	Q16280	B1ABCF000231	TRANSISTOR	1	
	Q16401	DG3D5020CSLW	TRANSISTOR	1	
	Q16402	DG3D5020CSLW	TRANSISTOR	1	
	Q16421	B1JAEP000014	TRANSISTOR	1	PAVCCZ
	Q16422	B1JAEP000014	TRANSISTOR	1	PAVCCZ
	Q16441	B1JAEP000013	TRANSISTOR	1	
	Q16451	B1JAEP000012	TRANSISTOR	1	
	Q16471	B1ABCF000231	TRANSISTOR	1	
	Q16490	B1CBGD000001	FET	1	
	Q16501	B1HFFPA00001	TRANSISTOR	1	
	Q16521	B1HFFPA00001	TRANSISTOR	1	
	Q16531	B1HFFPA00001	TRANSISTOR	1	
	Q16551	B1HFFPA00001	TRANSISTOR	1	
	Q16601	B1CERR000042	FET	1	
	Q16602	DSC2001Q0L	TRANSISTOR	1	
	Q16603	DSA2001S0L	TRANSISTOR	1	
	Q16606	DSC2001Q0L	TRANSISTOR	1	
	Q16607	B1CBGD000001	FET	1	
	Q16608	B1CBGD000001	FET	1	
	Q16621	B1JADN000005	TRANSISTOR	1	PAVCCZ
	Q16645	DSC2001Q0L	TRANSISTOR	1	
	Q16646	DSA2001S0L	TRANSISTOR	1	
	Q16647	B1CBGD000001	FET	1	
	Q16649	B1ABCN000007	TRANSISTOR	1	
	Q16660	B1CERR000042	FET	1	
	Q16661	B1JAER000010	TRANSISTOR	1	
	Q16662	DSC2001Q0L	TRANSISTOR	1	
	Q16663	DSA2001S0L	TRANSISTOR	1	
	Q16668	DSC2001Q0L	TRANSISTOR	1	
	Q16670	B1ADCN000007	TRANSISTOR	1	
	Q16671	B1ABCF000231	TRANSISTOR	1	
	Q16675	B1ADCN000007	TRANSISTOR	1	
	Q16676	B1ABCF000231	TRANSISTOR	1	
	Q16677	DSC2001Q0L	TRANSISTOR	1	
	Q16678	B1ABCF000231	TRANSISTOR	1	
	Q16701	B1ADCN000007	TRANSISTOR	1	
	Q16702	B1ABCF000231	TRANSISTOR	1	
	Q16762	B1HFFPA00001	TRANSISTOR	1	
	Q16801	DSA2001S0L	TRANSISTOR	1	
	Q16810	B1ABCF000231	TRANSISTOR	1	
	Q16815	B1ABCN000007	TRANSISTOR	1	
	Q16816	DSC2001Q0L	TRANSISTOR	1	
	Q16817	DSC2001Q0L	TRANSISTOR	1	
	Q16818	B1CBGD000001	FET	1	
	Q16876	B1ABCF000231	TRANSISTOR	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	Q16885	B1CFNG000001	FET	1	
	Q16920	B1ABCN000007	TRANSISTOR	1	
	Q16921	B1ABCN000007	TRANSISTOR	1	
	Q16930	DSC2001Q0L	TRANSISTOR	1	
	Q16931	B1ABCN000007	TRANSISTOR	1	
	Q16932	DSC2001Q0L	TRANSISTOR	1	
	R16001	D0GF7R5JA047	M 7.5 OHM,J, 0.33W	1	
	R16002	D0GF7R5JA047	M 7.5 OHM,J, 0.33W	1	
	R16022	D0GF7R5JA047	M 7.5 OHM,J, 0.33W	1	
	R16023	D0GF7R5JA047	M 7.5 OHM,J, 0.33W	1	
	R16031	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16032	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16033	ERJ6ENF5602	M 56KOHM, 1/10W	1	
	R16034	ERJ6ENF2702	M 27KOHM, 1/10W	1	
	R16041	D0GF5R6JA047	M 5.6 OHM,J, 0.33W	1	
	R16051	D0GF5R6JA047	M 5.6 OHM,J, 0.33W	1	
	R16101	D0GD221JA059	M 220 OHM,F,0.25W	1	
	R16102	D0GD221JA059	M 220 OHM,F,0.25W	1	
	R16103	D0GD100JA059	M 10 OHM,J,0.25W	1	
	R16104	D0GD100JA059	M 10 OHM,J,0.25W	1	
	R16105	ERJ8GEYJ474	M 470KOHM, J,1/8W	1	
	R16109	D0GD100JA059	M 10 OHM,J,0.25W	1	
	R16116	D0GB473JA057	M 47KOHM,J,1/10W	1	
	R16131	ERJ8GEYJ101V	M 100 OHM, J,1/8W	1	
	R16132	ERJ8GEYJ101V	M 100 OHM, J,1/8W	1	
	R16134	D0GD750JA059	M 75 OHM,J,0.25W	1	
	R16137	D0GF1R0JA047	M 1.0 OHM,J, 0.33W	1	
	R16141	D0GD100JA059	M 10 OHM,J,0.25W	1	
	R16143	D0GB473JA057	M 47KOHM,J,1/10W	1	
	R16151	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R16152	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R16154	D0GD750JA059	M 75 OHM,J,0.25W	1	
	R16155	D0GF1R0JA047	M 1.0 OHM,J, 0.33W	1	
	R16159	D0GF1R0JA047	M 1.0 OHM,J, 0.33W	1	
	R16161	D0GD100JA059	M 10 OHM,J,0.25W	1	
	R16163	D0GB473JA057	M 47KOHM,J,1/10W	1	
	R16171	D0GD100JA059	M 10 OHM,J,0.25W	1	
	R16173	D0GB473JA057	M 47KOHM,J,1/10W	1	
	R16181	D0GD100JA059	M 10 OHM,J,0.25W	1	
	R16183	D0GB473JA057	M 47KOHM,J,1/10W	1	
	R16191	ERJ6GEYJ151V	M 150 OHM,J,1/10W	1	
	R16192	D0GB103JA057	M 10K OHM J 1/10W	1	
	R16193	ERJ6GEYJ750	M 75 OHM,J,1/10W	1	
	R16195	D0GF1R0JA047	M 1.0 OHM,J, 0.33W	1	
	R16230	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R16231	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	R16241	EXB38V470J	RESISTOR ARRAY	1	
	R16242	EXB38V472JV	RESISTOR ARRAY	1	
	R16251	D1BB1401A055	M 1.4KOHM, 1/10W	1	
	R16252	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16253	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16254	ERJ6ENF6801	M 6.8KOHM, 1/10W	1	
	R16255	D1BB1201A055	M 1.2KOHM, 1/10W	1	
	R16256	D1BB1501A055	M1.50KOHM, 1/10W	1	
	R16257	D0GB273JA041	M 27K OHM J 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16258	D0GB103JA057	M 10K OHM J 1/10W	1	
	R16260	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16280	D0GB222JA041	M 2.2KOHM,J,1/10W	1	
	R16281	D0GB103JA057	M 10K OHM J 1/10W	1	
	R16282	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16283	D0GB473JA057	M 47KOHM,J,1/10W	1	
	R16284	D0GB224JA041	M 2.2KOHM,J,1/10W	1	
	R16285	EXB38V623J	RESISTOR ARRAY	1	
	R16288	D0GF334JA047	M 330KOHM,F,0.33W	1	
	R16289	D0GF334JA047	M 330KOHM,F,0.33W	1	
	R16290	D0GF334JA047	M 330KOHM,F,0.33W	1	
	R16307	ERJ6RBD6492	M64.9KOHM,F,1/10W	1	
	R16309	ERG1FJS333D	M 33KOHM, J, 1W	1	
	R16318	ERJ6RBD683	M 68KOHM,J,1/10W	1	
	R16319	ERJ6RBD2491	M 2.49KOHM, 1/10W	1	
	R16320	ERJ14YJ683	M 68KOHM, 1/4W	1	
	R16330	D0GB102JA041	M 1KOHM,J,1/10W	1	
	R16332	D0GB474JA041	M 470KOHM,J,1/10W	1	
	R16334	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	R16335	D0GB102JA041	M 1KOHM,J,1/10W	1	
	R16401	D0GF7R5JA047	M 7.5 OHM,J,0.33W	1	
	R16402	D0GF7R5JA047	M 7.5 OHM,J,0.33W	1	
	R16410	D0GB391JA041	M 390 OHM,J,1/10W	1	
	R16411	ERJ6ENF2700	M 270 OHM, 1/10W	1	
	R16416	D0GB103JA057	M 10K OHM J 1/10W	1	
	R16417	ERJ6GEYJ101V	M 100 OHM,J,1/10W	1	
	R16418	ERJ6GEYJ101V	M 100 OHM,J,1/10W	1	
	R16421	D0GF7R5JA047	M 7.5 OHM,J,0.33W	1	
	R16422	D0GF7R5JA047	M 7.5 OHM,J,0.33W	1	
	R16441	D0GF5R6JA047	M 5.6 OHM,J,0.33W	1	
	R16451	D0GF5R6JA047	M 5.6 OHM,J,0.33W	1	
	R16465	ERJ6ENF2702	M 27KOHM, 1/10W	1	
	R16466	ERJ6ENF5602	M 56KOHM, 1/10W	1	
	R16467	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16468	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16471	D0GB392JA041	M 3.9KOHM,J,1/10W	1	
	R16472	D0GB222JA041	M 2.2KOHM,J,1/10W	1	
	R16473	ERJ6GEYF561	M 560 OHM,F,1/10W	1	
	R16474	D0GB102JA041	M 1KOHM,J,1/10W	1	
	R16475	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	R16476	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	R16478	D0GB562JA041	M 5.6KOHM,J,1/10W	1	
	R16479	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R16490	ERJ6RED124	M 120KOHM, 1/10W	1	
	R16491	ERJ6RED124	M 120KOHM, 1/10W	1	
	R16492	ERJ6RED124	M 120KOHM, 1/10W	1	
	R16493	ERJ6RBD6191	M 6.19KOHM, 1/10W	1	
	R16494	D1BB2001A055	M 2KOHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16495	ERJ6ENF7500	M 750 OHM, 1/10W	1	
	R16496	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R16497	D0GB473JA057	M 47KOHM,J,1/10W	1	
	R16498	D0GB103JA057	M 10K OHM J 1/10W	1	
	R16503	D0GD100JA059	M 10 OHM,J,0.25W	1	
	R16504	D0GD750JA059	M 75 OHM,J,0.25W	1	
	R16506	D0GD100JA059	M 10 OHM,J,0.25W	1	
	R16509	D0GF1R0JA047	M 1.0 OHM,J,0.33W	1	
	R16512	D0GB473JA057	M 47KOHM,J,1/10W	1	
	R16517	D0GB473JA057	M 47KOHM,J,1/10W	1	
	R16521	ERJ6GEYJ101V	M 100 OHM,J,1/10W	1	
	R16522	ERJ6GEYJ101V	M 100 OHM,J,1/10W	1	
	R16523	D0GD750JA059	M 75 OHM,J,0.25W	1	
	R16531	D0GD100JA059	M 10 OHM,J,0.25W	1	
	R16533	D0GB473JA057	M 47KOHM,J,1/10W	1	
	R16534	D0GF5R6JA047	M 5.6 OHM,J,0.33W	1	
	R16551	D0GD100JA059	M 10 OHM,J,0.25W	1	
	R16553	D0GB473JA057	M 47KOHM,J,1/10W	1	
	R16561	EXB38V470J	RESISTOR ARRAY	1	
	R16562	EXB38V470J	RESISTOR ARRAY	1	
	R16563	EXB38V470J	RESISTOR ARRAY	1	
	R16564	EXB38V470J	RESISTOR ARRAY	1	
	R16565	EXB38V472JV	RESISTOR ARRAY	1	
	R16566	EXB38V472JV	RESISTOR ARRAY	1	
	R16567	EXB38V472JV	RESISTOR ARRAY	1	
	R16568	EXB38V472JV	RESISTOR ARRAY	1	
	R16570	EXB38V472JV	RESISTOR ARRAY	1	
	R16579	EXB38V470J	RESISTOR ARRAY	1	
	R16580	D0GB562JA041	M 5.6KOHM,J,1/10W	1	
	R16582	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16583	ERJ6ENF3902	M 39KOHM, 1/10W	1	
	R16584	ERJ6ENF6801	M 6.8KOHM, 1/10W	1	
	R16585	D1BB1001A055	M 1KOHM, 1/10W	1	
	R16586	D1BB2151A055	M2.15KOHM, 1/10W	1	
	R16587	D0GB222JA041	M 2.2KOHM,J,1/10W	1	
	R16588	D0GB103JA057	M 10K OHM J 1/10W	1	
	R16590	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
	R16591	EXB38V472JV	RESISTOR ARRAY	1	
	R16593	D1BB1401A055	M 1.4KOHM, 1/10W	1	
	R16601	D0GF1R0JA047	M 1.0 OHM,J,0.33W	1	
	R16604	ERJ6GEYJ331V	M 330 OHM J 1/10W	1	
	R16605	ERJ6GEYJ182	M 1.8KOHM,J,1/10W	1	
	R16607	D1BB6981A055	M6.98KOHM, 1/10W	1	
	R16609	D0GF202JA047	M 2KOHM,J, 0.33W	1	
	R16610	D0GB104JA041	M 100KOHM J 1/10W	1	
	R16612	D0GD470JA059	M 47 OHM,J,0.25W	1	
	R16615	D1BB1101A055	M 1.1 KOHM, 1/10W	1	
	R16617	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16621	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16631	D0GB103JA057	M 10K OHM J 1/10W	1	
	R16633	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R16634	ERJ6GEYJ471	M 470 OHM,J,1/10W	1	
	R16645	D0GB562JA041	M 5.6KOHM,J,1/10W	1	
	R16646	D1BB1181A055	M 1.18KOHM, 1/10W	1	
	R16648	D0GF202JA047	M 2KOHM,J, 0.33W	1	
	R16649	D0GD330JA059	M 33 OHM,F,0.25W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16650	D0GB104JA041	M 100KOHM J 1/10W	1	
	R16651	D0GF202JA047	M 2KOHM,J, 0.33W	1	
	R16652	ERJ6GEYF822	M 8.2KOHM,F,1/10W	1	
	R16653	ERJ8GEYJ182	M 1.8KOHM, J,1/8W	1	
	R16654	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R16655	D0GB103JA057	M 10K OHM J 1/10W	1	
	R16656	ERJ8GEYJ472V	M 4.7KOHM, J,1/8W	1	
	R16658	ERJ3RBD6341	M6.34 OHM, 1/13W	1	
	R16659	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R16660	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16661	D0GB122JA041	N 1.2KOHM J 1/10W	1	
	R16662	D1BB1002A087	M 10KOHM, 1/10W	1	
	R16663	ERJ6RBD7151	M 7.15KOHM, 1/10W	1	
	R16664	D0GF202JA047	M 2KOHM,J, 0.33W	1	
	R16665	D0GD330JA059	M 33 OHM,F,0.25W	1	
	R16666	D1BB2202A087	M 22KOHM, 1/10W	1	
	R16667	D0GF202JA047	M 2KOHM,J, 0.33W	1	
	R16668	D0GF202JA047	M 2KOHM,J, 0.33W	1	
	R16673	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16674	D0GF202JA047	M 2KOHM,J, 0.33W	1	
	R16675	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	R16677	D0GF202JA047	M 2KOHM,J, 0.33W	1	
	R16678	D0GF202JA047	M 2KOHM,J, 0.33W	1	
	R16679	ERJ3RBD1072	M10.7KOHM, 1/13W	1	
	R16680	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16681	D0GD100JA059	M 10 OHM,J,0.25W	1	
	R16684	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16685	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R16686	D0GB103JA057	M 10K OHM J 1/10W	1	
	R16687	D1BB2702A055	M 27KOHM, 1/10W	1	
	R16688	D1BB8871A055	M8.87KOHM, 1/10W	1	
	R16690	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	R16691	ERJ8GEYJ563	M 56KOHM, J,1/8W	1	
	R16692	ERJ6RBD152	M 1.5KOHM,J,1/10W	1	
	R16694	ERJ8GEYJ563	M 56KOHM, J,1/8W	1	
	R16695	ERJ6RBD152	M 1.5KOHM,J,1/10W	1	
	R16696	ERF5TK2R2	W 2.2 OHM, K, 5W	1	
	R16699	D0GB103JA057	M 10K OHM J 1/10W	1	
	R16707	ERJ6GEYG392	M 3.9KOHM,J,1/10W	1	
	R16711	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	R16712	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16717	D0GB102JA041	M 1KOHM,J,1/10W	1	
	R16719	ERJ3GEYJ220	M 22 OHM,J,1/16W	1	
	R16721	EXB38V220JV	RESISTOR ARRAY	1	
	R16742	D0GB473JA057	M 47KOHM,J,1/10W	1	
	R16745	D0GB474JA041	M 470KOHM,J,1/10W	1	
	R16746	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16747	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16750	D0GD123JA059	M 12KOHM,F,0.25W	1	
	R16751	D0GD154JA059	M 150KOHM,F,0.25W	1	
	R16752	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	R16753	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R16755	D0GD123JA059	M 12KOHM,F,0.25W	1	
	R16756	D0GD123JA059	M 12KOHM,F,0.25W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16761	D0GD100JA059	M 10 OHM,J,0.25W	1	
	R16763	D0GB473JA057	M 47KOHM,J,1/10W	1	
	R16765	D0GD100JA059	M 10 OHM,J,0.25W	1	
	R16769	D0GD750JA059	M 75 OHM,J,0.25W	1	
	R16772	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	R16773	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16774	ERG1SJ273	M 27KOHM, J, 1W	1	
	R16776	ERJ6GEYJ470V	M 47 OHM,J,1/10W	1	
	R16783	D0GD154JA059	M 150KOHM,F,0.25W	1	
	R16785	ERJ6ENF1073	M 107KOHM, 1/10W	1	
	R16786	ERJ6ENF1073	M 107KOHM, 1/10W	1	
	R16787	ERJ6ENF3302	M 33KOHM, 1/10W	1	
	R16789	D0GB103JA057	M 10K OHM J 1/10W	1	
	R16791	D0GB102JA041	M 1KOHM,J,1/10W	1	
	R16797	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R16798	D0GB222JA041	M 2.2KOHM,J,1/10W	1	
	R16799	D0GB102JA041	M 1KOHM,J,1/10W	1	
	R16801	ERJ6RBD223V	M 22KOHM, 1/16W	1	
	R16802	ERJ6RBD3092	M30.9KOHM,F,1/10W	1	
	R16804	ERJ8GEYJ112	M 1.1KOHM, J,1/8W	1	
	R16818	D1BB3302A055	M 33KOHM, 1/10W	1	
	R16819	ERJ6ENF1503	M 150KOHM, 1/10W	1	
	R16820	ERJ6ENF1503	M 150KOHM, 1/10W	1	
	R16822	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16823	ERJ6ENF8202	M 82KOHM, 1/10W	1	
	R16824	ERJ6ENF3302	M 33KOHM, 1/10W	1	
	R16825	D0GD154JA059	M 150KOHM,F,0.25W	1	
	R16826	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R16827	D0GB222JA041	M 2.2KOHM,J,1/10W	1	
	R16829	D0GB102JA041	M 1KOHM,J,1/10W	1	
	R16831	ERJ6RBD6812	M68.1KOHM,F,1/10W	1	
	R16832	ERJ6RBD7152	M71.5KOHM,F,1/10W	1	
	R16837	D0GB102JA041	M 1KOHM,J,1/10W	1	
	R16838	ERG1FJS104D	M 100KOHM, J, 1W	1	
	R16841	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	R16843	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R16844	ERA6YEB242	M 24KOHM, 1/10W	1	
	R16845	ERJ6RBD6652	M66.5KOHM,F,1/10W	1	
	R16846	ERJ6RBD6492	M64.9KOHM,F,1/10W	1	
	R16849	ERJ6RBD6492	M64.9KOHM,F,1/10W	1	
	R16851	D0GB474JA041	M 470KOHM,J,1/10W	1	
	R16852	D0GB474JA041	M 470KOHM,J,1/10W	1	
	R16860	ERG2FNJS8R2E	M 8.2 OHM, J, 2W	1	
	R16870	ERJ14YJ683	M 68KOHM, 1/4W	1	
	R16873	ERA6YEB242	M 24KOHM, 1/10W	1	
	R16891	D1BF6982A058	M 6.98KOHM, 1/10W	1	
	R16892	D1BF8252A058	M 8.25KOHM, 1/10W	1	
	R16893	D1BF8252A058	M 8.25KOHM, 1/10W	1	
	R16897	D1BB1001A055	M 1KOHM, 1/10W	1	
	R16898	D1BB1051A055	M 1.05KOHM, 1/10W	1	
	R16899	D1BB2741A055	M2.74KOHM, 1/10W	1	
	R16900	D0GB103JA057	M 10K OHM J 1/10W	1	
	R16901	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	R16904	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R16919	D1BB7501A055	M7.50KOHM, 1/10W	1	
	R16920	D0GB103JA057	M 10K OHM J 1/10W	1	
	R16921	D1BB1241A055	M1.24KOHM, 1/10W	1	
	R16922	D1BB3481A055	M3.48KOHM, 1/10W	1	
	R16923	D0GB103JA057	M 10K OHM J 1/10W	1	
	R16926	ERJ6GEYJ222V	M 2.2K OHM J 1/10W	1	
	R16927	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R16928	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R16929	D0GF1R0JA047	M 1.0 OHM,J, 0.33W	1	
	R16930	D1BF2R70A021	M 2.7 OHM, 1/10W	1	
	R16931	D1BF2R70A021	M 2.7 OHM, 1/10W	1	
	R16932	ERJ6GEYJ223	M 22KOHM,J,1/10W	1	
	R16933	D1BB1002A055	M 10KOHM, 1/10W	1	
	R16934	D1BB6801A055	M 6.8KOHM, 1/10W	1	
	R16935	D0GB512JA041	M 5.1KOHM,J,1/10W	1	
	R16936	D0GB222JA041	M 2.2KOHM,J,1/10W	1	
	R16937	D0GB184JA041	M 180KOHM J 1/10W	1	
	R16938	D0GB184JA041	M 180KOHM J 1/10W	1	
	R17100	D0GF151JA047	M 150 OHM,J, 0.33W	1	
	R17101	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17102	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17103	D0GB201JA041	M 200 OHM,J,1/10W	1	PAVCCZ
	R17104	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17105	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17106	D0GZ1R0JA020	C1.0 OHM, J, 0.5W	1	PAVCCZ
	R17107	D0GB201JA041	M 200 OHM,J,1/10W	1	PAVCCZ
	R17109	D0GZ1R0JA020	C1.0 OHM, J, 0.5W	1	PAVCCZ
	R17111	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17112	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17113	D0GB201JA041	M 200 OHM,J,1/10W	1	PAVCCZ
	R17114	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17115	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17116	D0GB201JA041	M 200 OHM,J,1/10W	1	PAVCCZ
	R17117	D0GZ1R0JA020	C1.0 OHM, J, 0.5W	1	PAVCCZ
	R17119	D0GZ1R0JA020	C1.0 OHM, J, 0.5W	1	PAVCCZ
	R17123	D0GB102JA041	M 1KOHM,J,1/10W	1	
	R17124	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R17200	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17201	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17202	D0GB201JA041	M 200 OHM,J,1/10W	1	PAVCCZ
	R17203	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17204	D0GZ1R0JA020	C1.0 OHM, J, 0.5W	1	PAVCCZ
	R17205	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17207	D0GB201JA041	M 200 OHM,J,1/10W	1	PAVCCZ
	R17209	D0GZ1R0JA020	C1.0 OHM, J, 0.5W	1	PAVCCZ

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R17214	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17215	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17216	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17217	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17218	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17219	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17220	D0GZ1R0JA020	C1.0 OHM, J, 0.5W	1	PAVCCZ
	R17222	D0GZ1R0JA020	C1.0 OHM, J, 0.5W	1	PAVCCZ
	R17224	EXB38V470J	RESISTOR ARRAY	1	
	R17225	EXB38V470J	RESISTOR ARRAY	1	
	R17226	D0GB681JA041	M 680 OHM,J,1/10W	1	
	R17227	EXB38V681J	RESISTOR ARRAY	1	
	R17228	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R17229	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R17232	D0GBR00Z0002	M 0 OHM J 1/10W	1	
	R17233	D0GBR00Z0002	M 0 OHM J 1/10W	1	
	R17296	D0GBR00Z0002	M 0 OHM J 1/10W	1	
	R17300	EXB38V681J	RESISTOR ARRAY	1	
	R17301	D0GB681JA041	M 680 OHM,J,1/10W	1	
	R17302	EXB38V470J	RESISTOR ARRAY	1	
	R17303	EXB38V470J	RESISTOR ARRAY	1	
	R17304	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17305	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17306	D0GB201JA041	M 200 OHM,J,1/10W	1	PAVCCZ
	R17307	D0GZ1R0JA020	C1.0 OHM, J, 0.5W	1	PAVCCZ
	R17309	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17310	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17312	D0GB201JA041	M 200 OHM,J,1/10W	1	PAVCCZ
	R17313	D0GZ1R0JA020	C1.0 OHM, J, 0.5W	1	PAVCCZ
	R17318	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17319	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17320	D0GB201JA041	M 200 OHM,J,1/10W	1	PAVCCZ
	R17321	EXB38V681J	RESISTOR ARRAY	1	
	R17322	D0GZ1R0JA020	C1.0 OHM, J, 0.5W	1	PAVCCZ
	R17323	EXB38V681J	RESISTOR ARRAY	1	
	R17325	EXB38V470J	RESISTOR ARRAY	1	
	R17326	EXB38V470J	RESISTOR ARRAY	1	
	R17327	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17328	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17329	D0GB201JA041	M 200 OHM,J,1/10W	1	PAVCCZ
	R17330	D0GZ1R0JA020	C1.0 OHM, J, 0.5W	1	PAVCCZ
	R17332	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17333	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17334	D0GB201JA041	M 200 OHM,J,1/10W	1	PAVCCZ
	R17335	D0GZ1R0JA020	C1.0 OHM, J, 0.5W	1	PAVCCZ
	R17337	D0GB101JA041	M 100 OHM,J,1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R17338	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17339	D0GB201JA041	M 200 OHM,J,1/10W	1	PAVCCZ
	R17340	D0GZ1R0JA020	C1.0 OHM, J, 0.5W	1	PAVCCZ
	R17342	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17343	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17344	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R17345	D0GB101JA041	M 100 OHM,J,1/10W	1	
	R17346	D0GZ1R0JA020	C1.0 OHM, J, 0.5W	1	PAVCCZ
	R17348	D0GF151JA047	M 150 OHM,J, 0.33W	1	
	R17360	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R17393	D0GBR00Z0002	M 0 OHM J 1/10W	1	
	R17394	D0GBR00Z0002	M 0 OHM J 1/10W	1	
	R17395	D0GBR00Z0002	M 0 OHM J 1/10W	1	
	SC2	K1KY02B00012	2P CONNECTOR	1	
	SC20	K1MY35BA0345	35P CONNECTOR	1	
	SC41	K1KA09AA0707	9P CONNECTOR	1	
	SC42	K1KA09AA0707	9P CONNECTOR	1	
	SC46	K1KA09AA0707	9P CONNECTOR	1	
	SC50	K1KA02AA0193	2P CONNECTOR	1	
	SS11	K1KA03A00608	3P CONNECTOR	1	
	SS21	K1KA07A00170	7P CONNECTOR	1	
	SS24	K1KB07AA0087	7P CONNECTOR	1	
	SS33	K1KY08AA0719	8P CONNECTOR	1	
	SS53	K1MN13B00091	13P CONNECTOR	1	
	SS56	K1MN13B00091	13P CONNECTOR	1	
	SS58	K1MN13B00091	13P CONNECTOR	1	
	T16471	G4DYA0000200	SWITCHING TRANS	1	
	ZA16001	K4CD01000011	AV TERMINAL	1	
	ZA16002	K4CD01000011	AV TERMINAL	1	
	ZA16003	K4CD01000011	AV TERMINAL	1	
	ZA16401	K4CD01000011	AV TERMINAL	1	
	ZA16402	K4CD01000011	AV TERMINAL	1	
	ZA16403	K4CD01000011	AV TERMINAL	1	
	ZA16404	K4CD01000011	AV TERMINAL	1	
	ZA16407	K4CD01000011	AV TERMINAL	1	
	ZA17100	K4CD01000013	AV TERMINAL	1	
	ZA17101	K4CD01000013	AV TERMINAL	1	
	ZA17102	K4CD01000013	AV TERMINAL	1	
	ZA17103	K4CD01000013	AV TERMINAL	1	
	ZA17200	K4CD01000013	AV TERMINAL	1	
	ZA17201	K4CD01000013	AV TERMINAL	1	
	ZA17202	K4CD01000013	AV TERMINAL	1	
	ZA17203	K4CD01000013	AV TERMINAL	1	
	ZA17300	K4CD01000013	AV TERMINAL	1	
	ZA17301	K4CD01000013	AV TERMINAL	1	
	ZA17302	K4CD01000013	AV TERMINAL	1	
	ZA17303	K4CD01000013	AV TERMINAL	1	
	ZA17304	K4CD01000013	AV TERMINAL	1	
△	A601	AYRA652MSV8T	ARRESTOR	1	
	C201	ECJ1VB1H332K	C 3300PF, K, 50V	1	
	C202	ACDE2R221KP	2kv 220p	1	
	C203	ACDE2R221KP	2kv 220p	1	
	C204	ECWH8333HA	P 0.033PF, J, 8KV	1	
	C205	ECWH8333HA	P 0.033PF, J, 8KV	1	
△	C206	ACKX101KYTJ5	250V 100p	1	
	C207	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
	C208	ACMBC681J5T	50V 680p	1	
	C209	ECJ1VC1H471J	C 470PF J 50V	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C211	ACRZL1H100T	50V 10P	1	
	C212	ACRZL1H100T	50V 10P	1	
	C213	ACYBB475K2F	25V 4.7PF	1	
	C214	ACMH1H010T	50V 1P	1	
	C215	ECJ1VB1E333K	C 0.033UF, K, 25V	1	
	C217	ACMEB104K2T	25V 0.1P	1	
	C218	ACMBB106K1AT	10V 10P	1	
	C219	ECJ1VB1H472K	C 4700PF, K, 50V	1	
	C220	ACMBB106K1AT	10V 10P	1	
	C221	ACMEB104K5T	50V 0.1P	1	
	C251	ACMEB104K2T	25V 0.1P	1	
	C252	ECQV1H224JL	P 0.22UF, J, 50V	1	
	C255	ECQE2473SKF	C 0.047U 250V	1	
△	C256	ACCST230681K	230V 680P	1	
	C257	ACDE1SL220JP	1kv 22p	1	
	C352	ACRZL1V561T	35V 560P	1	
	C366	ACRZL1E471LT	25V 470P	1	
	C375	ACMAB105K5T	50V 1P	1	
	C376	ACMEB105K1T	16V 1P	1	
	C379	ECJ2VB1H472K	C 0.42PF, K, 50V	1	
	C380	ACMEB333K5T	50V 0.033P	1	
	C382	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C383	ACMEB105K1T	16V 1P	1	
	C401	ECQE2104SKF	250V 0.1PF	1	
	C402	ECQE2104SKF	250V 0.1PF	1	
△	C403	ACKMQ140471H	140V 470P	1	
	C404	ACRZL1H101T	50V 100P	1	
	C405	ACMBR222K2ET	250V 2200p	1	
△	C406	ACKZE1K152ZE	80V 1500P	1	
	C407	ACRR3DD101K7	2kv 100PF	1	
△	C408	ACKZE1K152ZE	80V 1500P	1	
	C409	ACMBR222K2ET	250V 2200p	1	
	C410	ACMEB222K5T	50V 2200p	1	
	C413	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C415	ACMEB104K5T	50V 0.1P	1	
	C416	ACMEB224K2T	25V 0.22P	1	
	C418	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C419	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C420	ACMEB224K2T	25V 0.22P	1	
△	C501	ACLE103KC	PLASTIC FILM CAPACITOR(Xcap)	1	
△	C503	ACPAG2W470T	450V 47P	1	
	C505	ACRZL1H220T	50V 22P	1	
	C506	ECJ1VB1H102K	C 1000PF, K, 50V	1	
	C507	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C508	ACMBB474K2T	25V 0.47P	1	
	C509	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C510	ACRZL1H100T	50V 10P	1	
	C511	ECJ1VB1H102K	C 1000PF, K, 50V	1	
	C512	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C513	ECJ1VB1H102K	C 1000PF, K, 50V	1	
	C514	ACRZL1H221T	50V 220P	1	
	C515	ACRZL1H220T	50V 22P	1	
△	C516	ACKX221KYP	250V 220p	1	
	C518	ECQE2223SKF	250V 0.022PF	1	
	C551	ACRZG1A471T	10V 470P	1	
	C553	ACMEB474K1T	16V 0.47P	1	
	C554	ACRZL1E821LT	16V 0.47P	1	
	C555	ACMBB225K2T	25V 2.2P	1	
	C556	ACMBB105K2T	25V 1P	1	
	C557	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
	C558	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C560	ACRZL1E221T	25V 220P	1	
	C561	ACRZL1H100T	50V 10P	1	
	C573	ACDE1R102KP	1kv 1000P	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	C574	ACMEB681K5T	50V 680P	1	
⚠	C601	ACLEM474XKC	450V 2.2P	1	
⚠	C602	ACKX221KYP	250V 220p	1	
⚠	C603	ACKX221KYP	250V 220p	1	
⚠	C605	ECWF2W225KA	450V 2.2P	1	
	C606	ECJ1VB1H102K	C 1000PF, K, 50V	1	
	C608	ECJ1VB1H222K	C 2200PF, K, 50V	1	
	C609	ACTEB104K5T	50V 0.1P	1	
	C610	ACMEB224K2T	25V 0.22P	1	
	C611	ECJ1XC1H102J	C 1000PF, J, 50V	1	
	C613	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C615	ACMBB225K2T	25V 2.2P	1	
	C616	ACTEB474K1T	16V 0.47P	1	
⚠	C617	ACLEM474XKC	450V 2.2P	1	
	C620	ACMBB474K2T	25V 0.47P	1	
⚠	C623	ACKMQ2W331LZ	450V 330P	1	
	C628	ACMBR225K2T	25V 2.2P	1	
	C629	ECQV1H334JL	50V 0.33P	1	
	C630	ECJ1VC1H471J	C 470PF J 50V	1	
	C631	ECJ1VB1H103K	C 0.001UF, K, 50V	1	
	C701	ACRZL1A221T	50V 0.1P	1	
	C702	ACMEB104K5T	50V 0.1P	1	
	C703	ACMEB104K5T	50V 0.1P	1	
	C704	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
	C705	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
	C706	ECJ2XC1H102J	C 1000PF, J, 50V	1	
	C707	ACMEB104K5T	50V 0.1P	1	
	C708	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
	C709	ACMEB104K5T	50V 0.1P	1	
	C710	ACMEB224K1T	16V 0.22P	1	
	C711	ACMEB223K5T	50V 0.022P	1	
	C712	ECJ2XB1H104K	C 0.1UF, K, 50V	1	
	C713	ACMBB225K2T	25V 2.2P	1	
	C715	ACMEB105K1T	16V 1P	1	
	CN701	AKB6B-PH-KS	6P CONNECTOR	1	
	D201	VDERA83-004T	DIODE	1	
	D202	VDERA83-004T	DIODE	1	
	D203	VDAG01AT	DIODE	1	
	D204	VDAG01AT	DIODE	1	
	D205	VDAG01AT	DIODE	1	
	D206	VD1SS133T	DIODE	1	
	D251	VDD4SBL40	DIODE	1	
	D252	VD1SS133T	DIODE	1	
	D351	VDFMEN210A	DIODE	1	
	D359	VDRK46LF307	DIODE	1	
	D401	VDD4SBL20U	DIODE	1	
	D402	VDAG01AT	DIODE	1	
	D403	VDYG901C3R	DIODE	1	
⚠	D501	VDS1WBA80	DIODE	1	
	D502	VD1SS133T	DIODE	1	
	D503	VXST3D140LM2	DIODE	1	
	D504	VDAG01AT	DIODE	1	
	D505	VDAG01AT	DIODE	1	
	D506	VD1T7GA1	DIODE	1	
	D507	VD1T7GA1	DIODE	1	
	D509	VDAP01CT	DIODE	1	
	D551	VDCB863-12T	DIODE	1	
	D552	VDYG902C3R	DIODE	1	
	D601	VD1SS133T	DIODE	1	
	D602	VD1SS133T	DIODE	1	
⚠	D603	VDD15XB80	DIODE	1	
	D605	VD1SS133T	DIODE	1	
⚠	D606	VD1N5406G-07	DIODE	1	
	D607	VDYG982S6R	DIODE	1	
	D608	VDERA83-004T	DIODE	1	
	D701	VDERA83-004T	DIODE	1	
	D702	VDRB721Q40	DIODE	1	
	D703	VDRB721Q40	DIODE	1	
	D704	VDRB721Q40	DIODE	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	D705	VD1SS133T	DIODE	1	
⚠	F201	HU216005BEP	FUSE	1	
⚠	F501	HU215002BEP	FUSE	1	
⚠	F601	HU215010BEP	FUSE	1	
⚠	F602	HU215010BEP	FUSE	1	
	IC201	VIMCZ5203D	INTEGRATED CIRCUIT	1	
	IC202	VINJM2903ME1	INTEGRATED CIRCUIT	1	
	IC251	VIJM1431AF	IC	1	
	IC352	VISC2628T	INTEGRATED CIRCUIT	1	
	IC403	VISC2603ASKT	IC	1	
⚠	IC501	MIP3E50MY	POWER INTEGRATED CIRCUIT	1	
	IC551	VIJM2380AFE1	IC	1	
	IC601	VIFA5610NTE1	IC	1	
	IC701	VILC87F2G083	IC	1	
	JQ1	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	JQ2	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	JQ3	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	JQ4	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	JQ5	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	JQ6	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	JQ7	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	JQ8	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	JQ9	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	JQ10	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	JR1	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	JR2	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	JR3	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
	JR4	ERJ8GEY0R00	M 0 OHM, 1/8W	1	
⚠	K602	ALKS329M02	RELAY	1	
⚠	K605	ALKS329M02	RELAY	1	
	L201	AYTSKA170T	FERRITE BEAD INDUCTOR	1	
	L351	AYS1215003D	CHOKE COIL	1	
	L353	EXCELSA35T	BEAD CHOKE	1	
	L401	AYCA45VB681K	CHOKE COIL	1	
	L402	AYJ231214HY	CHOKE COIL	1	
	L501	AYTSKA170T	FERRITE BEAD INDUCTOR	1	
⚠	L601	AYS259027HY	CHOKE COIL	1	
⚠	L602	AYS256227HY	CHOKE COIL	1	
⚠	L603	ETB42AZ15GAD	TRANSFORMER	1	
	P2	AKB2P3S-VH	2P CONNECTOR	1	
	P6	AKB11B-PH-KS	11P CONNECTOR	1	
	P7	AKB14B-PH-KS	14P CONNECTOR	1	
⚠	P9	AKS02B-VT	CONNECTOR	1	
	P11	AKB3P4S-VH-L	3P CONNECTOR	1	
	P25	AKB10B-PH-KS	10P CONNECTOR	1	
	P34	AKB3B-PH-KS	3P CONNECTOR	1	
	P35	AKB4B-PH-KS	4P CONNECTOR	1	
⚠	PC201	VPS2581AL2HE	OPTOISOLATOR	1	
⚠	PC202	VPS2581AL2HE	OPTOISOLATOR	1	
⚠	PC501	VPS2581AL2HE	OPTOISOLATOR	1	
⚠	PC502	VPS2581AL2HE	OPTOISOLATOR	1	
⚠	PC504	VPS2581AL2HE	OPTOISOLATOR	1	
⚠	Q201	VKFMV17N55ES	FET	1	
⚠	Q202	VKFMV17N55ES	FET	1	
	Q203	VQ2PB709ART	TRANSISTOR	1	
	Q204	VQ2PD601ART	TRANSISTOR	1	
	Q251	2SK3018TL	FET	1	
	Q252	2SK3018TL	FET	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	Q355	2SJ651	FET	1	
	Q401	2SK3607	FET	1	
	Q402	2SA1776TV2P	FET	1	
	Q403	2SA1776TV2P	FET	1	
	Q404	VQPBSS4350T	TRANSISTOR	1	
	Q405	VQ2PD601ART	TRANSISTOR	1	
	Q406	2SK3018TL	FET	1	
	Q407	VQPBSS4350T	TRANSISTOR	1	
	Q408	VQPBSS5350T	TRANSISTOR	1	
	Q502	2SK3018TL	FET	1	
	Q503	VQPBSS4350T	TRANSISTOR	1	
	Q504	VQ2PB709ART	TRANSISTOR	1	
	Q505	2SK3018TL	FET	1	
	Q506	VQ2PB709ART	TRANSISTOR	1	
	Q551	2SJ673	FET	1	
	Q557	VKRJ0319DSP	FET	1	
	Q558	2SK3018TL	FET	1	
	Q559	VQ2PB709ART	TRANSISTOR	1	
⚠	Q601	VKR6015ANZ	FET	1	
	Q602	VQPBSS4350T	TRANSISTOR	1	
	Q603	VQPBSS5350T	TRANSISTOR	1	
	Q605	2SK3018TL	FET	1	
⚠	Q606	VKR6015ANZ	FET	1	
	Q607	VQ2PB709ART	TRANSISTOR	1	
	Q701	VQ2PB710ARLT	TRANSISTOR	1	
	Q702	VQ2PB710ARLT	TRANSISTOR	1	
	Q703	VQ2PD601ART	TRANSISTOR	1	
	Q704	VQ2PD601ART	TRANSISTOR	1	
	Q705	VQ2PD601ART	TRANSISTOR	1	
	Q706	VQ2PB709ART	TRANSISTOR	1	
	Q707	VQ2PD601ART	TRANSISTOR	1	
	Q708	VQ2PD601ART	TRANSISTOR	1	
	R201	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R202	ERJ6GEYJ153V	M 15KOHM,J,1/10W	1	
	R203	D0GB103JA057	M 10K OHM J 1/10W	1	
	R204	D0GB103JA057	M 10K OHM J 1/10W	1	
	R205	ERJ6ENF3903	M 390KOHM,J,1/10W	1	
	R206	ERJ6ENF3903	M 390KOHM,J,1/10W	1	
	R207	ERJ6ENF3903	M 390KOHM,J,1/10W	1	
	R208	ERJ6ENF3903	M 390KOHM,J,1/10W	1	
	R209	D0GB183JA057	M 18K OHM J 1/10W	1	
	R210	ERJ6RBD152	M 1.5KOHM,J,1/10W	1	
	R211	ERJ3GEYD153V	M 15KOHM,J,1/16W	1	
	R213	ERX1SJ1R0	M 1.0 OHM, J, 1W	1	
	R214	ERX12SJ5R6J	M 5.6 OHM, J,1/2W	1	
	R215	ERG12SJ680J	M 68 OHM, J,1/2W	1	
	R216	ERG12SJ680J	M 68 OHM, J,1/2W	1	
	R217	ERJ6ENF1800	M 180 OHM, 1/10W	1	
	R218	ERJ6ENF1500	M 150 OHM, 1/10W	1	
	R219	ARRF5EJ50MB	0.05 OHM, 5W	1	
	R221	ERJ6ENF3903	M 390KOHM,J,1/10W	1	
	R222	ERJ6ENF3903	M 390KOHM,J,1/10W	1	
	R223	ERJ6ENF3903	M 390KOHM,J,1/10W	1	
	R224	ERJ6ENF3903	M 390KOHM,J,1/10W	1	
	R231	ERQ14AJ4R7J	F 4.7 OHM, J,1/4W	1	
	R232	ERJ3EKF1001	M 1KOHM, 1/16W	1	
	R233	ERJ3EKF1001	M 1KOHM, 1/16W	1	
	R234	ERJ3EKF1582	M15.8KOHM, 1/16W	1	
	R235	ERJ3EKF9310	M 931OHM, 1/16W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R236	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R237	D0GB473JA057	M 47KOHM,J,1/10W	1	
	R238	ERJ6RBD152	M 1.5KOHM,J,1/10W	1	
	R239	ERDS2FJ103	C 10KOHM, J,1/4W	1	
	R253	ERJ6GEY0R00V	M 0 OHM J 1/10W	1	
	R254	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R256	ERJ6ENF3901	M 3.9KOHM, 1/10W	1	
	R257	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R258	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R259	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R260	ERJ6GEYJ202	M 2KOHM,J,1/10W	1	
	R264	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R265	ERJ6ENF1742	M17.4KOHM, 1/10W	1	
	R266	ERJ6ENF7502	M 75KOHM, 1/10W	1	
	R267	ERJ6ENF7502	M 75KOHM, 1/10W	1	
	R268	ERJ6ENF7502	M 75KOHM, 1/10W	1	
	R269	ERJ6ENF7322	M73.2KOHM, 1/10W	1	
	R270	ERJ6ENF4992	M49.9KOHM, 1/10W	1	
	R271	ERJ6ENF4992	M49.9KOHM, 1/10W	1	
	R272	ERJ6ENF4992	M49.9KOHM, 1/10W	1	
	R273	ERJ6ENF4992	M49.9KOHM, 1/10W	1	
	R274	ERJ6ENF4872	M48.7KOHM, 1/10W	1	
	R275	ERJ6ENF9312	M93.1KOHM, 1/10W	1	
	R276	D0GB103JA057	M 10K OHM J 1/10W	1	
	R277	ERJ6ENF1503	M 150KOHM, 1/10W	1	
	R278	D0GB103JA057	M 10K OHM J 1/10W	1	
	R279	D0GB102JA057	M 1KOHM,J,1/10W	1	
	R280	D0GB102JA057	M 1KOHM,J,1/10W	1	
	R351	ERJ6ENF1332	M13.3KOHM, 1/10W	1	
	R352	ERJ6ENF1302	M 13KOHM, 1/10W	1	
	R353	ERJ6ENF8661	M8.66KOHM, 1/10W	1	
	R354	ERJ6ENF8661	M8.66KOHM, 1/10W	1	
	R371	ERJ6RND1782	CHIP RESISTOR	1	
	R372	ERJ6RND1001	CHIP RESISTOR	1	
	R389	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
	R390	ERJ3GEY0R00	M 0 OHM, 1/16W	1	
	R391	ERJ6GEYJ183V	M 18KOHM,J,1/10W	1	
	R392	ERJ6ENF3921	M3.92KOHM, 1/10W	1	
	R393	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R394	ERJ6ENF1002	M 10KOHM, 1/10W	1	
	R402	ERJ3EKF1002	M 10KOHM, 1/16W	1	
	R403	ERG12SJ100J	M 10 OHM, J,1/2W	1	
	R404	ERJ6ENF2492	M24.9KOHM, 1/10W	1	
	R405	ARRF2EJR10B	250V 2200P	1	
	R408	ERJ3GEYJ682	M 6.8KOHM,J,1/16W	1	
	R409	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R411	ERJ6ENF2001V	M 2KOHM, 1/10W	1	
	R412	ERJ6ENF2001V	M 2KOHM, 1/10W	1	
	R413	ERJ6ENF2552	M25.5KOHM, 1/10W	1	
	R414	ERJ6ENF2492	M24.9KOHM, 1/10W	1	
	R416	ERJ3GEYJ333	M 33KOHM,J,1/16W	1	
	R417	ERJ6ENF3482	M34.8KOHM, 1/10W	1	
	R418	ERJ6ENF3482	M34.8KOHM, 1/10W	1	
	R419	D0GB103JA057	M 10K OHM J 1/10W	1	
	R420	ERJ6ENF1301	M 1.3KOHM, 1/10W	1	
	R421	ERJ6ENF1332	M13.3KOHM, 1/10W	1	
	R422	ERJ6ENF2492	M24.9KOHM, 1/10W	1	
	R423	ARSG734K220U	22 OHM, 0.33W	1	
	R425	ERJ3GEYD153V	M 15KOHM,J,1/16W	1	
	R426	ERJ3GEYD153V	M 15KOHM,J,1/16W	1	
	R428	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R429	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R433	ERJ3EKF82R5	82.5 OHM 62.5mW	1	
	R434	ERJ3RED270	M 27 OHM, 1/16W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R435	ERJ3EKF1820	M 182 OHM, 1/16W	1	
	R436	ERJ3RED270	M 27 OHM, 1/16W	1	
	R437	ERJ3EKF1241	M1.24KOHM, 1/16W	1	
	R438	ERJ3EKF5621	M5.62KOHM, 1/16W	1	
	R439	D0GB154JA057	M 150KOHM J 1/10W	1	
	R440	ERJ14YJ220U	M 22 OHM, J,1/4W	1	
	R441	ARSG734K150U	15 OHM, 0.33W	1	
	R501	ERJ6ENF4123	M 412KOHM, 1/10W	1	
	R502	ERJ6ENF4123	M 412KOHM, 1/10W	1	
	R503	ERJ6ENF4123	M 412KOHM, 1/10W	1	
	R504	ERJ6ENF4123	M 412KOHM, 1/10W	1	
	R505	ERJ6ENF4123	M 412KOHM, 1/10W	1	
	R506	ERJ6ENF4123	M 412KOHM, 1/10W	1	
⚠	R507	ARRCR6J825M	8.2MOHM, 1W	1	
	R508	ERJ3EKF1303	M 130KOHM, 1/16W	1	
	R512	ERJ3GEYJ224	M 220KOHM,J,1/16W	1	
	R513	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R514	ERJ3EKF1303	M 130KOHM, 1/16W	1	
	R515	D0GB103JA057	M 10K OHM J 1/10W	1	
	R516	ERJ6GEYF473	M 47KOHM,J,1/10W	1	
	R518	ERG12SJ220J	M 22 OHM, J,1/2W	1	
	R519	ERJ3GEYJ224	M 220KOHM,J,1/16W	1	
	R520	ERDS2FJ121	C 120 OHM, J,1/4W	1	
	R521	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R522	ERJ6GEYJ180	M 18 OHM,J,1/10W	1	
	R524	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R525	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R526	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	R529	ARR5B100JC2	5W 10 OHM	1	
	R530	ERJ3GEYJ471	M 470 OHM,J,1/16W	1	
	R531	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R532	ERJ6ENF4123	M 412KOHM, 1/10W	1	
	R533	ERJ6ENF4123	M 412KOHM, 1/10W	1	
	R534	ERJ6ENF4123	M 412KOHM, 1/10W	1	
	R535	ERJ6ENF4123	M 412KOHM, 1/10W	1	
	R536	ERJ6ENF4123	M 412KOHM, 1/10W	1	
	R537	ERJ6ENF4123	M 412KOHM, 1/10W	1	
	R538	ERG1DJ334	330k 1W	1	
	R551	ERJ6GEYJ151V	M 150 OHM,J,1/10W	1	
	R552	ERJ3GEYJ472	M 4.7KOHM,J,1/16W	1	
	R553	D0GB102JA057	M 1KOHM,J,1/10W	1	
	R555	ERJ3EKF1072	M10.7KOHM, 1/16W	1	
	R556	ERJ3EKF1002	M 10KOHM, 1/16W	1	
	R557	ERJ3EKF7872	M78.7KOHM, 1/16W	1	
	R558	ERJ6GEYJ124V	M 120KOHM,J,1/10W	1	
	R570	D0GB473JA057	M 47KOHM,J,1/10W	1	
	R573	ERJ6GEYJ332V	M 3.3K OHM J 1/10W	1	
	R574	ERG2SJ561H	M 560 OHM, J, 2W	1	
	R575	ERG2SJ561H	M 560 OHM, J, 2W	1	
	R576	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R577	ERJ6GEYJ333V	M 33KOHM,J,1/10W	1	
	R578	ERJ6GEYF561	M 560 OHM,F,1/10W	1	
	R579	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
	R580	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
⚠	R601	ARRCR5J624M	620M 0.5W	1	
	R603	ERJ6ENF2703	M 270KOHM, 1/10W	1	
	R604	ERJ6ENF2703	M 270KOHM, 1/10W	1	
	R605	ERJ6ENF2703	M 270KOHM, 1/10W	1	
	R606	ERJ6ENF2703	M 270KOHM, 1/10W	1	
	R607	ERJ3EKF3302	M 33KOHM, 1/16W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R608	ERJ3EKF1002	M 10KOHM, 1/16W	1	
	R609	D0GB225JA057	M 2.2MOHM J 1/10W	1	
	R610	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R611	ERJ3GEYJ470	M 47 OHM,J,1/16W	1	
	R612	ERJ6ENF3093	M 309KOHM, 1/10W	1	
	R613	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R614	ERJ6ENF3093	M 309KOHM, 1/10W	1	
	R615	D0GB103JA057	M 10K OHM J 1/10W	1	
	R616	ERJ6ENF3093	M 309KOHM, 1/10W	1	
	R617	ARRF5EJ75MB	0.075 OHM, 5W	1	
	R618	ARRF5EJ75MB	0.075 OHM, 5W	1	
	R619	ERJ6ENF3163	M 316KOHM, 1/10W	1	
	R620	ERJ6ENF3163	M 316KOHM, 1/10W	1	
	R621	ERJ3EKF1652	M16.5KOHM, 1/16W	1	
	R622	ERJ6ENF9312	M93.1KOHM, 1/10W	1	
	R623	ERJ6ENF9312	M93.1KOHM, 1/10W	1	
	R624	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R625	ERDS2FJ101	C 100 OHM, J,1/4W	1	
	R626	ERJ6ENF9312	M93.1KOHM, 1/10W	1	
	R627	ERDS2FJ154	C 150KOHM, J,1/4W	1	
	R628	ERJ6ENF9312	M93.1KOHM, 1/10W	1	
	R629	ERG12SJ150J	M 15 OHM, J,1/2W	1	
	R630	ERJ6ENF9312	M93.1KOHM, 1/10W	1	
	R631	ERJ6ENF9312	M93.1KOHM, 1/10W	1	
	R634	ERJ6ENF3093	M 309KOHM, 1/10W	1	
	R635	ERJ6ENF3093	M 309KOHM, 1/10W	1	
	R636	ERJ6ENF3093	M 309KOHM, 1/10W	1	
	R637	ERJ6ENF9312	M93.1KOHM, 1/10W	1	
	R638	ERJ6ENF9312	M93.1KOHM, 1/10W	1	
	R640	ERJ6ENF1692	M16.9KOHM, 1/10W	1	
	R641	ERJ6GEYJ151V	M 150 OHM,J,1/10W	1	
	R642	D0GB473JA057	M 47KOHM,J,1/10W	1	
	R649	ERJ6ENF2703	M 270KOHM, 1/10W	1	
	R650	ERJ6ENF2703	M 270KOHM, 1/10W	1	
	R651	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R652	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R653	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R654	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R660	ERDS2FJ472	C 4.7KOHM, J,1/4W	1	
	R661	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R662	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R663	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R664	ERJ6GEYJ220	M 22 OHM,J,1/10W	1	
	R665	D0GB103JA057	M 10K OHM J 1/10W	1	
	R666	ERJ3GEYJ223	M 22KOHM,J,1/16W	1	
	R667	D0GB181JA057	M 180 OHM,J,1/10W	1	
	R701	ERJ6GEYJ1R0	M 1 OHM,J,1/10W	1	
	R702	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
	R705	ERJ6GEYJ1R0	M 1 OHM,J,1/10W	1	
	R706	D0GB103JA057	M 10K OHM J 1/10W	1	
	R707	D0GB103JA057	M 10K OHM J 1/10W	1	
	R708	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R709	ERDS2FJ102	M 1KOHM,J,1/10W	1	
	R710	ERJ6GEYJ104V	M 100KOHM,J,1/10W	1	
	R711	ERJ3GEYJ514	M 510KOHM,J,1/16W	1	
	R712	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R713	ERJ3GEYJ104	M 100KOHM,J,1/16W	1	
	R714	ERJ6ENF4991	M4.99KOHM, 1/10W	1	
	R715	ERJ6ENF4991	M4.99KOHM, 1/10W	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
	R716	ERJ6ENF4991	M4.99KOHM, 1/10W	1	
	R717	ERJ6ENF4991	M4.99KOHM, 1/10W	1	
	R718	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R719	ERDS2FJ821	C 820 OHM, J,1/4W	1	
	R720	ERJ3GEYJ561	M 560 OHM,J,1/16W	1	
	R721	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R722	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R723	ERJ6GEYJ103V	M 10K OHM J 1/10W	1	
	R724	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R725	D0GB103JA057	M 10K OHM J 1/10W	1	
	R729	D0GB103JA057	M 10K OHM J 1/10W	1	
	R730	ERJ6GEYJ224	M 220KOHM,J,1/10W	1	
	R731	ERJ6GEYJ101V	M 100 OHM,J,1/10W	1	
	R732	D0GB103JA057	M 10K OHM J 1/10W	1	
	R733	ERJ3EKF4701	M 4.7KOHM, 1/16W	1	
	R734	ERJ3EKF5601	M 5.6KOHM, 1/16W	1	
	R735	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R736	ERJ3GEYJ122	M 1.2KOHM,J,1/16W	1	
	R737	ERJ6GEYJ221V	M 220 OHM,J,1/10W	1	
	R738	D0GB103JA057	M 10K OHM J 1/10W	1	
	R739	ERJ3GEYJ101	M 100 OHM,J,1/16W	1	
	R740	D0GB103JA057	M 10K OHM J 1/10W	1	
	R741	D0GB103JA057	M 10K OHM J 1/10W	1	
	R742	ERDS2FJ103	C 10KOHM, J,1/4W	1	
	R743	ERJ3GEYJ221	M 220 OHM,J,1/16W	1	
	R744	D0GB103JA057	M 10K OHM J 1/10W	1	
	R745	D0GB103JA057	M 10K OHM J 1/10W	1	
	R746	D0GB103JA057	M 10K OHM J 1/10W	1	
	R747	D0GB103JA057	M 10K OHM J 1/10W	1	
	R748	D0GB103JA057	M 10K OHM J 1/10W	1	
	R749	D0GB103JA057	M 10K OHM J 1/10W	1	
	R750	D0GB103JA057	M 10K OHM J 1/10W	1	
	R751	ERJ6GEYJ102V	M 1K OHM J 1/10W	1	
	R752	D0GB103JA057	M 10K OHM J 1/10W	1	
	R755	ERJ6GEYJ472V	M 4.7K OHM J 1/10W	1	
	R756	ERJ6GEYJ101V	M 100 OHM,J,1/10W	1	
	R757	ARRF5EJR15B	0.15 OHM 5W	1	
	R758	ER0S2CHF1002	M 10KOHM, F,1/4W	1	
	R759	ER0S2CHF1002	M 10KOHM, F,1/4W	1	
⚠	RF601	HUA5MC100JP2	THERMAL CUTOFF WITH RESISTOR	1	
⚠	T201	ETB39LJ12GAD	TRANSFORMER	1	
⚠	T501	ETB29AK1RGAD	TRANSFORMER	1	
⚠	TG1	TW-4BS-2L	LUG TERMINAL	1	
⚠	TG2	TW-4BS-2L	LUG TERMINAL	1	
⚠	TG3	TW-4BS-2L	LUG TERMINAL	1	

Safety	Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
⚠	TG4	TW-4BS-2L	LUG TERMINAL	1	
⚠	TG5	TW-4BS-2L	LUG TERMINAL	1	
	VR251	EVMEASA01B25	CONTROL 200KOHMB	1	
	VR401	EVMAASA00B54	CONTROL 50KOHMB	1	
⚠	Z601	ERZVGED751	VARISTOR	1	
⚠	Z602	ERZVGAD471	VARISTOR	1	
	ZD203	VZMTZJ27DT	ZENER DIODE	1	
	ZD204	VZMTZJ27DT	ZENER DIODE	1	
	ZD205	VZMTZJ27DT	ZENER DIODE	1	
	ZD206	VZMTZJ5.1BT	ZENER DIODE	1	
	ZD251	VZMTZJ5.6BT	ZENER DIODE	1	
	ZD401	VZMTZJ15CT	ZENER DIODE	1	
	ZD402	VZMTZJ10CT	ZENER DIODE	1	
	ZD501	VZMTZJ30DT	ZENER DIODE	1	
	ZD502	VZMTZJ30DT	ZENER DIODE	1	
	ZD503	VZMTZJ30DT	ZENER DIODE	1	
	ZD504	VZMTZJ15CT	ZENER DIODE	1	
	ZD505	VZMTZJ30DT	ZENER DIODE	1	
	ZD506	VZMTZJ18CT	ZENER DIODE	1	
	ZD507	VZMTZJ8.2CT	ZENER DIODE	1	
	ZD508	VZMTZJ15CT	ZENER DIODE	1	
	ZD509	VZMTZJ27DT	ZENER DIODE	1	
	ZD554	VZPTZ6.2BT	ZENER DIODE	1	
	ZD601	VZMTZJ5.1BT	ZENER DIODE	1	
	ZD602	VZMTZJ4.7BT	ZENER DIODE	1	
	ZD603	VZMTZJ10CT	ZENER DIODE	1	